

4

3

2


1

B



B

A

A

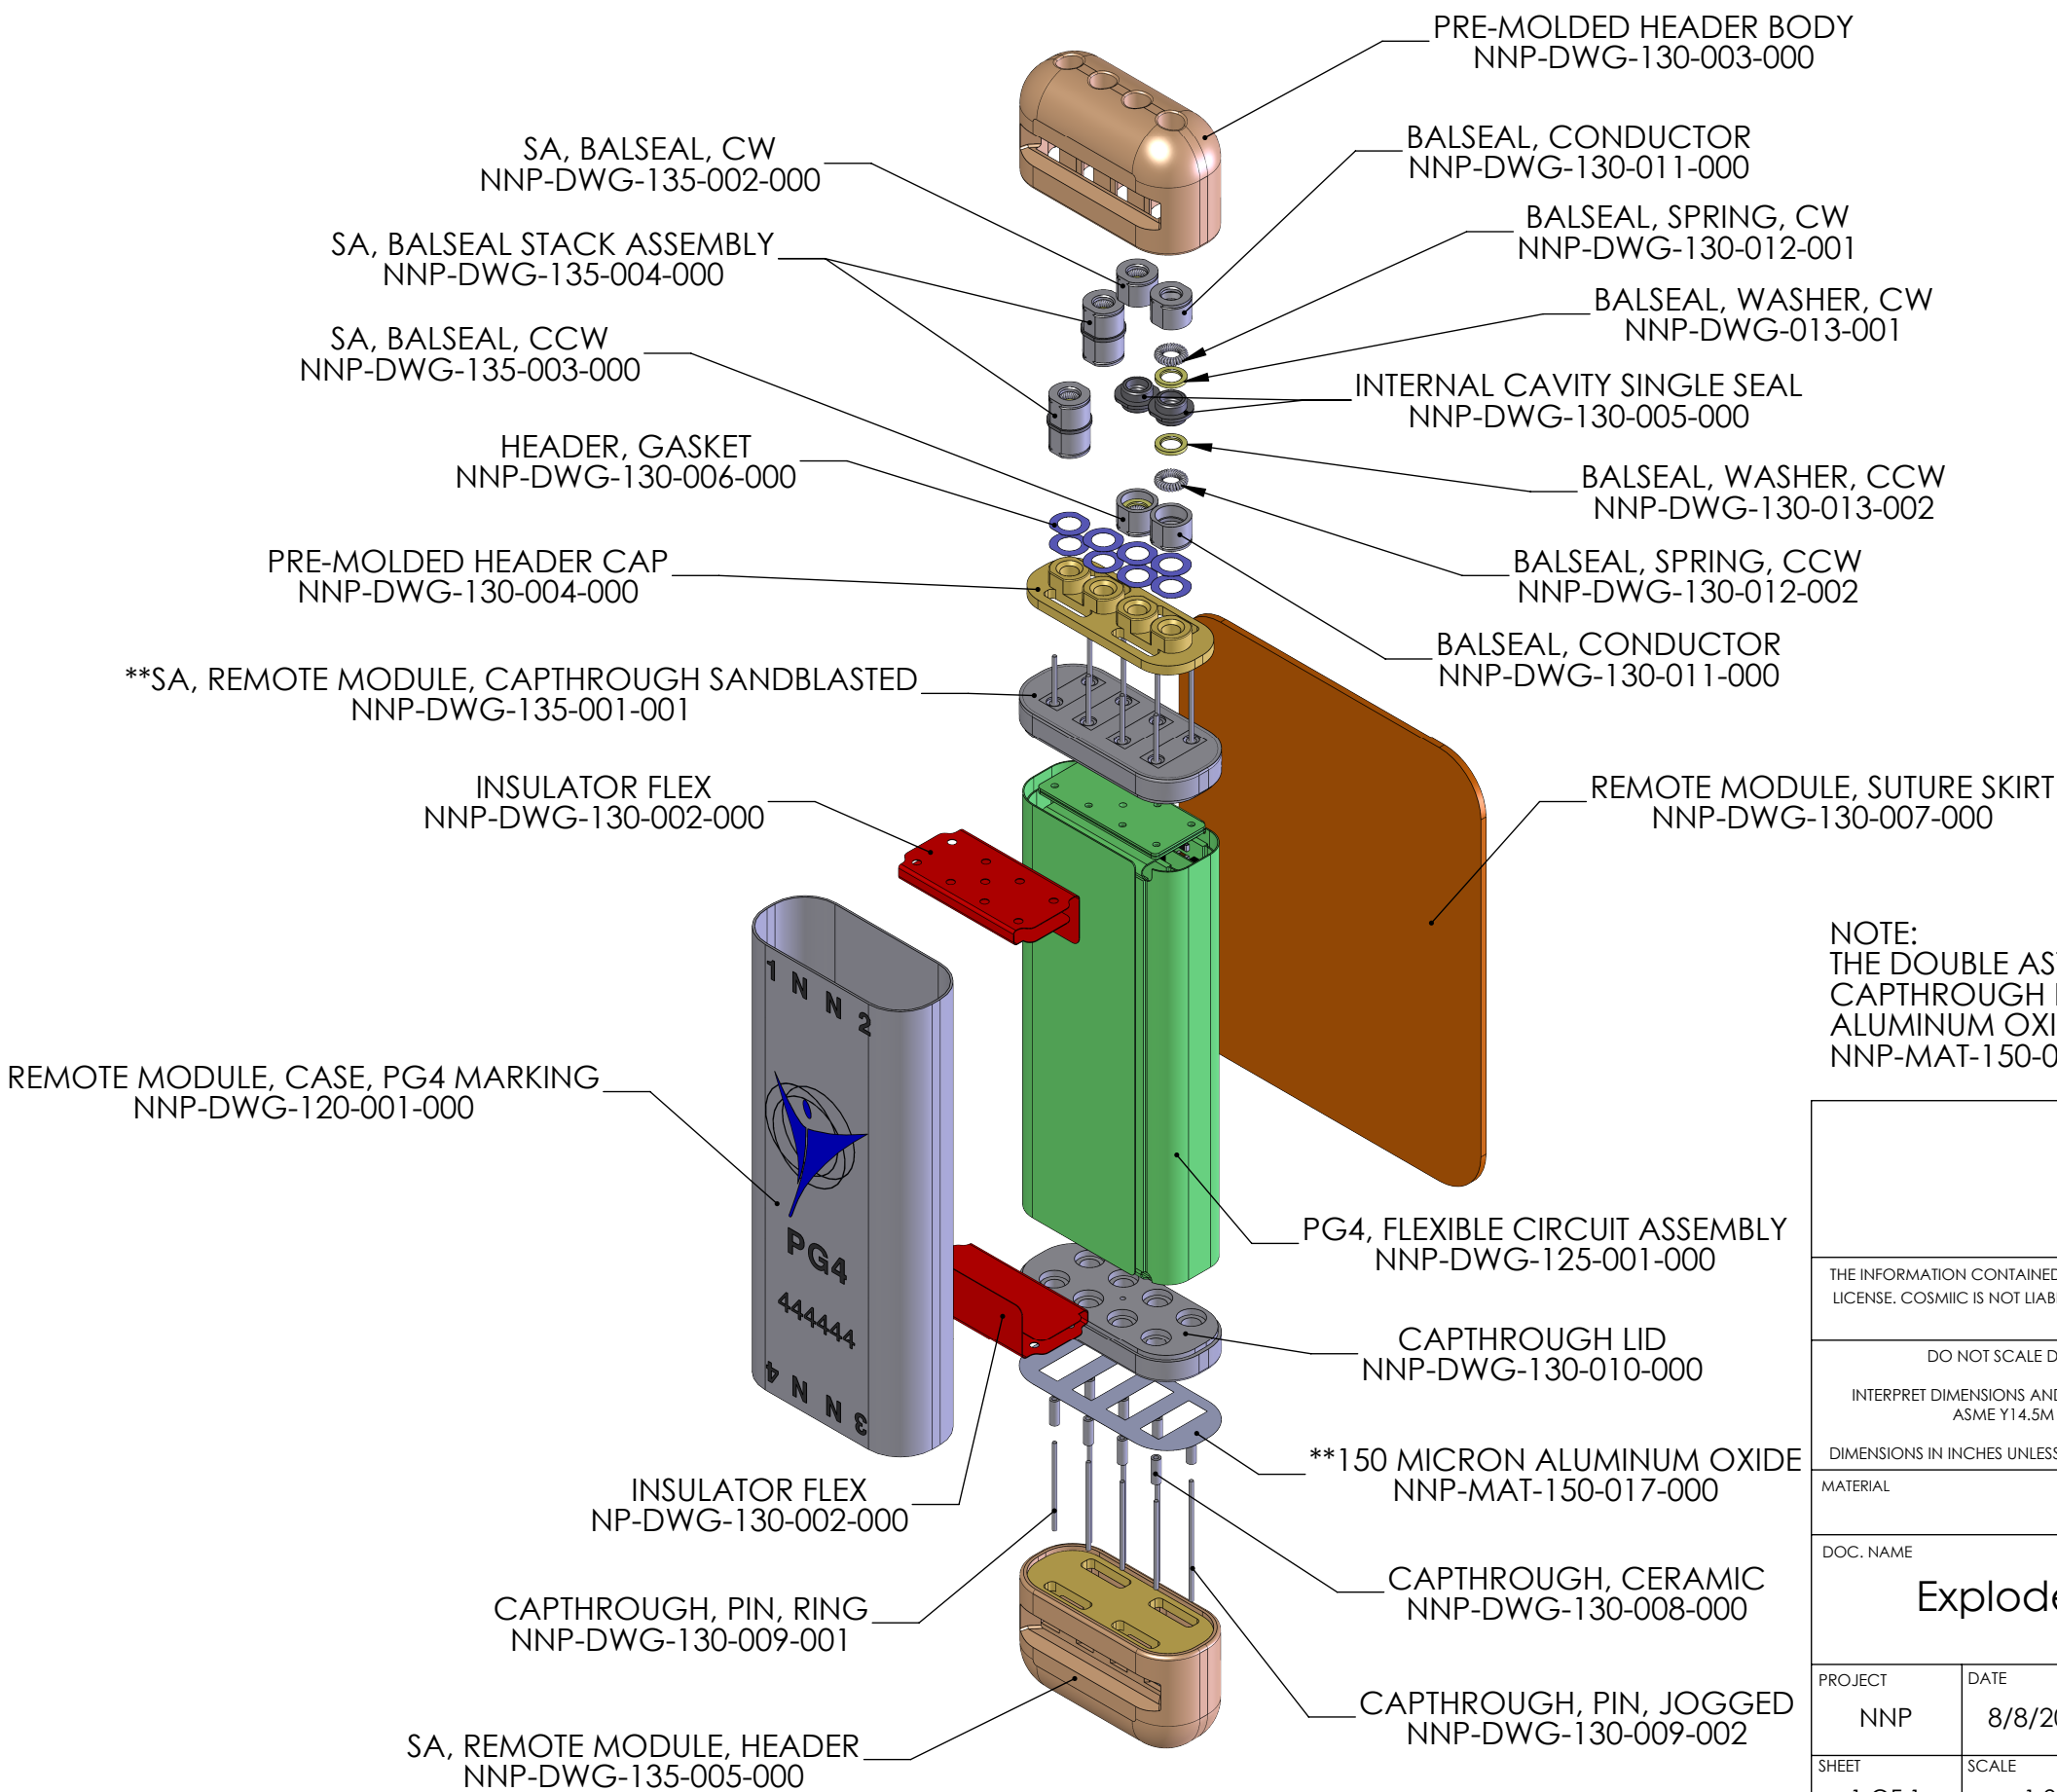

NOTE:
THE DOUBLE ASTERISK (**) INDICATES A PROCESS. THE RM
CAPTHROUGH IS GRIT BLASTED WITH 150 MICRON
ALUMINUM OXIDE IN THE AREA SHOWN IN
NNP-MAT-150-017-000

<div> Open source implantable devices</div>				
THE INFORMATION CONTAINED IN THIS DRAWING IS PUBLICLY RELEASED BY COSMIC UNDER AN OPEN SOURCE LICENSE. COSMIC IS NOT LIABLE FOR ANY ASPECT OF USE OF THIS DRAWING, INCLUDING EDITS, FABRICATION, AND REPRODUCTION OF THIS DESIGN.				
DO NOT SCALE DRAWING INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 2018 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION 		
MATERIAL		FINISH		
DOC. NAME Exploded Pulse Generator Module				
PROJECT NNP	DATE 8/8/2024	SIZE B	DOC. NUMBER	REV
SHEET 1 OF 1	SCALE 1:2			