



4

3


2

1

B

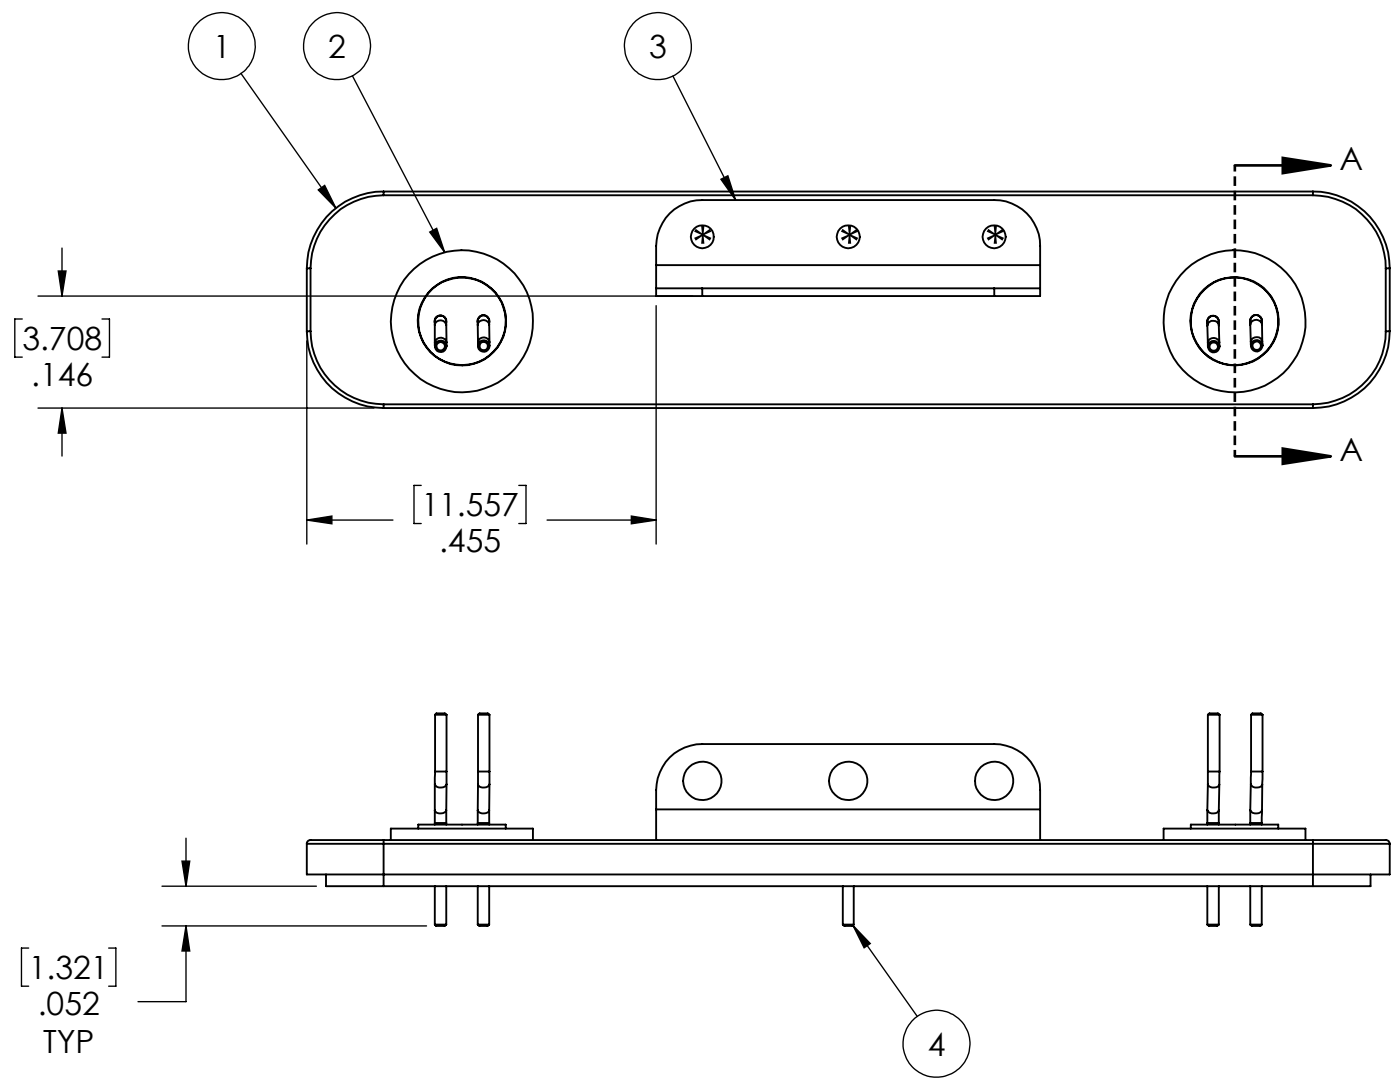

SECTION A-A

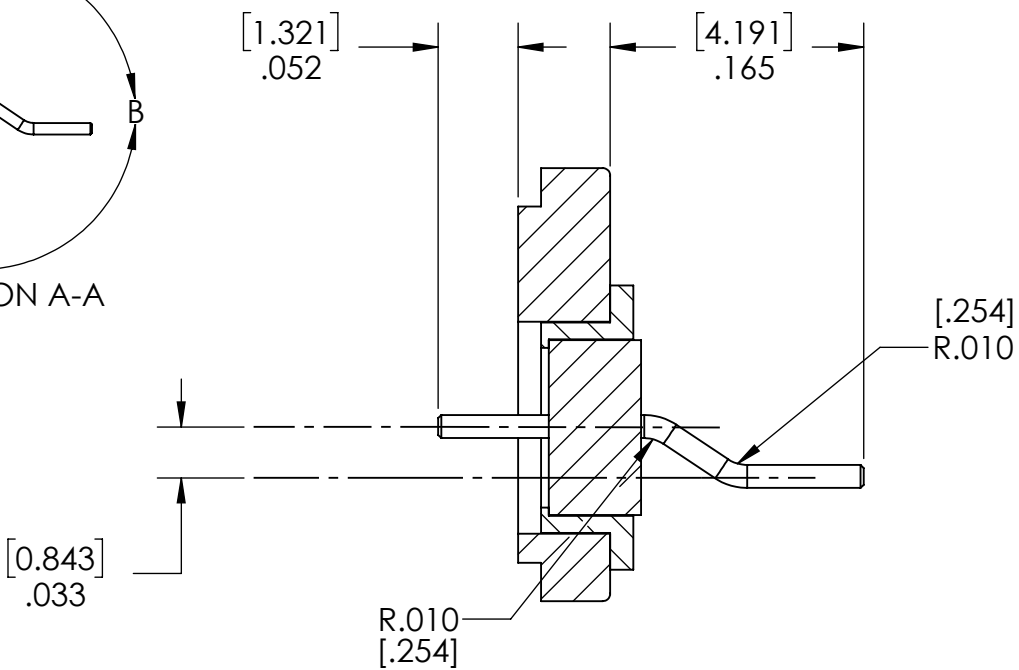


DETAIL B
SCALE 8 : 1

A


- NOTES:
UNLESS OTHERWISE SPECIFIED:
- 1. USE STANDARD WELDING METHODOLOGY FOR ATTACHMENT OF ITEMS 2, 3 AND 4, TO ITEM 1.
 - 2. HERMETICITY TEST PER MIL STD 883. STANDARD LEAK RATE SHALL NOT EXCEED 5×10^{-9} ATM-CC/SEC HELIUM.
 - 3. PARTS ARE TO BE FREE OF DIRT, GREASE AND ANY OTHER PROCESS CONTAMINATES.

ITEMNO.	PART NUMBER	DESCRIPTION	QTY
1	CH10003-000	LIDTHROUGH PLATE	1
2	CH10004-000	BIPOLAR FEEDTHROUGH	2
3	CH10005-000	ANCHOR BRACKET	1
4	CH10006-000	GROUND PIN	1



Open source implantable devices

THE INFORMATION CONTAINED IN THIS DRAWING IS PUBLICLY RELEASED BY COSMIC UNDER THE OPEN SOURCE APACHE 2.0 LICENSE. COSMIC IS NOT LIABLE FOR ANY ASPECT OF USE OF THIS DRAWING, INCLUDING EDITS, FABRICATION, AND REPRODUCTION OF THIS DESIGN.

DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION		
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 2018				
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED				
MATERIAL		FINISH		
DOC. NAME				
LIDTHROUGH PLATE ASSEMBLY				
PROJECT	DATE	SIZE	DOC. NUMBER	REV
SHEET	SCALE	B	CH20000-000	A
1 OF 1	4:1			

A

4

3

2

1