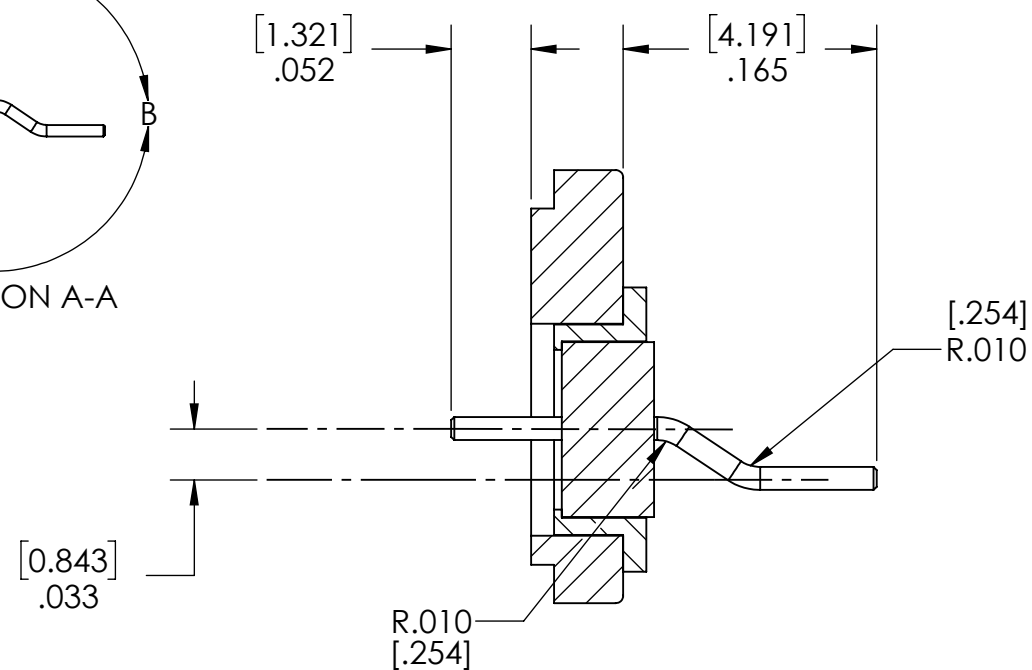
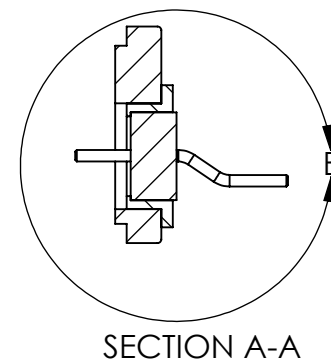
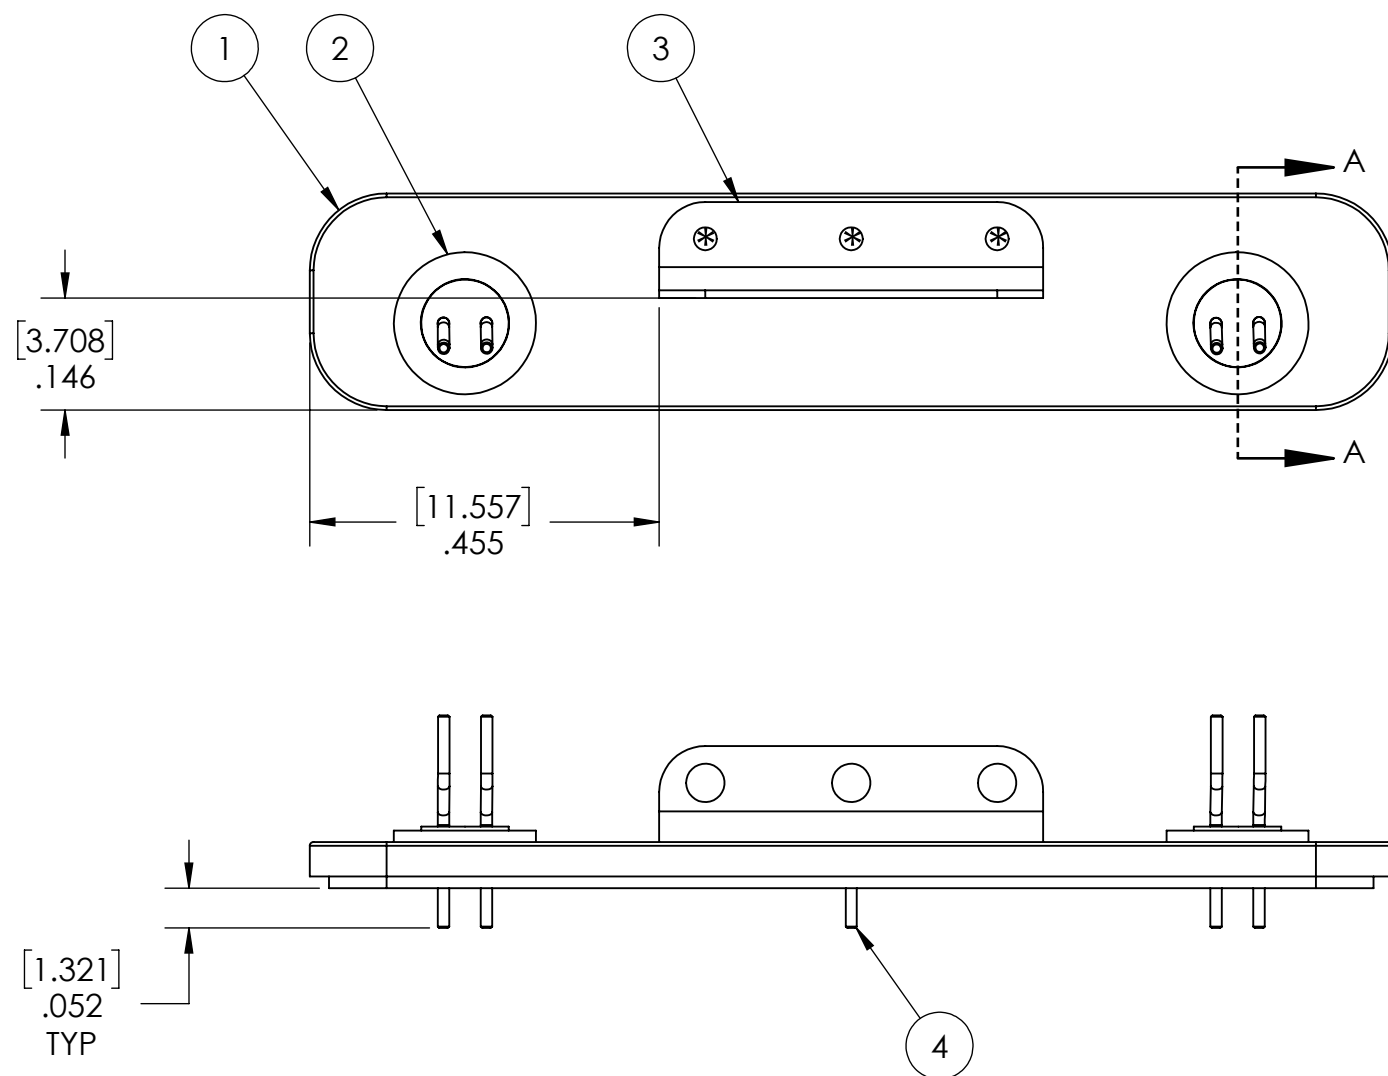


4

3

2

1

DETAIL B
SCALE 8 : 1

NOTES:
UNLESS OTHERWISE SPECIFIED:

1. USE STANDARD WELDING METHODOLOGY FOR ATTACHMENT OF ITEMS 2, 3 AND 4, TO ITEM 1.
2. HERMETICITY TEST PER MIL STD 883. STANDARD LEAK RATE SHALL NOT EXCEED 5×10^{-9} ATM-CC/SEC HELIUM.
3. PARTS ARE TO BE FREE OF DIRT, GREASE AND ANY OTHER PROCESS CONTAMINATES.

ITEMNO.	PART NUMBER	DESCRIPTION	QTY
1	CH10003-000	LIDTHROUGH PLATE	1
2	CH10004-000	BIPOLAR FEEDTHROUGH	2
3	CH10005-000	ANCHOR BRACKET	1
4	CH10006-000	GROUND PIN	1



THE INFORMATION CONTAINED IN THIS DRAWING IS PUBLICLY RELEASED BY COSMIC UNDER THE OPEN SOURCE APACHE 2.0 LICENSE. COSMIC IS NOT LIABLE FOR ANY ASPECT OF USE OF THIS DRAWING, INCLUDING EDITS, FABRICATION, AND REPRODUCTION OF THIS DESIGN.

DO NOT SCALE DRAWING

INTERPRET DIMENSIONS AND TOLERANCES PER
ASME Y14.5M - 2018

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MATERIAL

FINISH

DOC. NAME

INTEGER LIDTHROUGH PLATE ASSEMBLY

PROJECT

DATE

SIZE

DOC. NUMBER

REV

SHEET
1 OF 1SCALE
4:1

B

CH20000-000

A

4

3

2

1