

PV Dynamics Assesment

Simulation Command

.tran 20m

.dc IV_curve 0 20 0.1

Solar panel configuration

.param Ns=32 Np=1


SDM five parameter values

.param Iph=5.9829 Rsh=20 Rs=500e-6 Is=150e-9 eta=1.52 Ls=1e-6

Dynamic parameter values

.param Cjo=10e-3 Vj=1.0 M=0.5 TT=10e-9 FC=0.5 ri=7.25e-3

.param Vsun=1 kW/m²

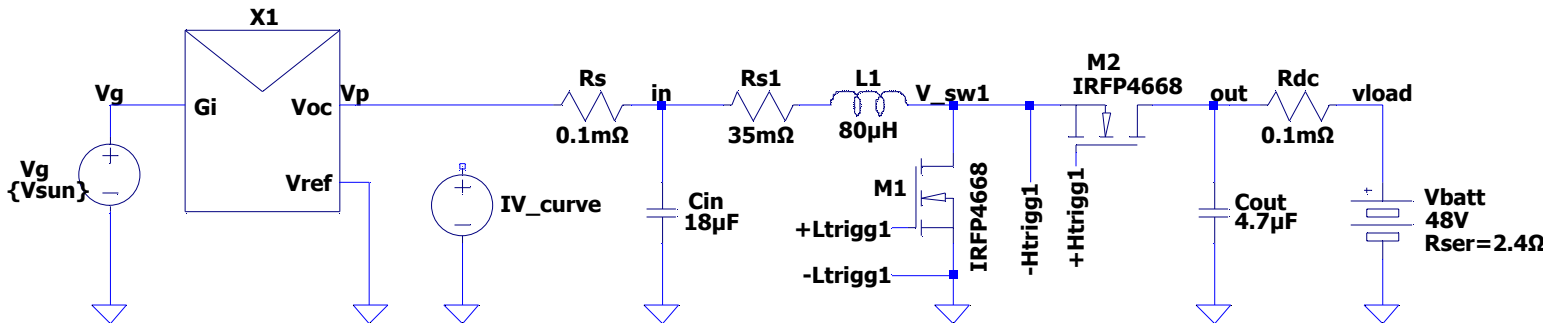

Control Signal

Pulse-width modulator

Vhigh=5 Vh=0 Vt=0 U4

Td=100ns
.lib switching.lib
PULSE(0 1 0 9.998u 1n 1n 10u)

Vdelta

Vdelta1

V_driverH1

V_driverL1

12V


12V

-Htrigg1

Power Supply

Drivers

Transistor gate drive circuit



Transistor gate drive circuit

