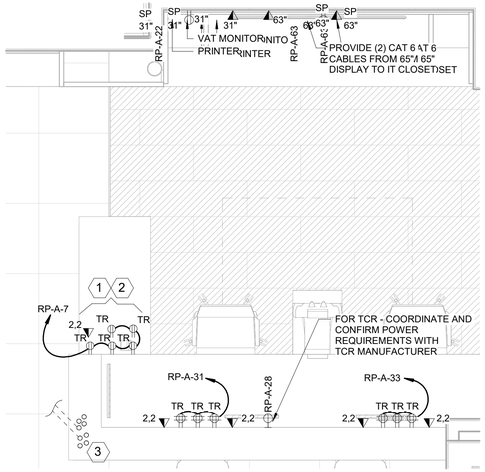



NOTE:

COORDINATE LOCATION OF ALL ELECTRICAL DEVICES WITH ARCHITECTURAL MILLWORK.

2 E-100 ELECTRICAL - POWER ENLARGED PLAN - TRANSACTION BAR1
1/2" = 1'-0"

TRANSACTION BAR KEYED NOTES:

1. ALL RECEPTACLES AND DATA AT TRANSACTION BAR, BELOW COUNTERHEIGHT, SHALL HAVE BLACK COVER PLATES AND OUTLETS U.O.N. COORDINATE DEVICE LOCATIONS WITH MILLWORK PROVIDER AND ARCHITECT. BOX ROUGH OPENINGS SHALL BE CUT BY THE MILLWORK PROVIDER.
2. E.C. TO COORDINATE WITH MILLWORK PROVIDER FOR EXACT LOCATIONS. PROVIDE OUTLETS WITHIN MILLWORK POCKET.
3. TRANSACTION BAR CONDUITS: PROVIDE FOUR (4) 3/4" CONDUITS FOR POWER AND (4) FOUR 2" CONDUITS FOR TELE/DATA FROM UNDER SLAB WITH CONDUIT BUSHINGS AND PULL STRINGS. COORDINATE WITH ARCHITECT AND MILLWORK VENDOR FOR EXACT STUB-UP LOCATIONS PRIOR TO ROUGH-IN. CONDUITS SHALL BE SEALED TO PREVENT RODENT INTRUSION.

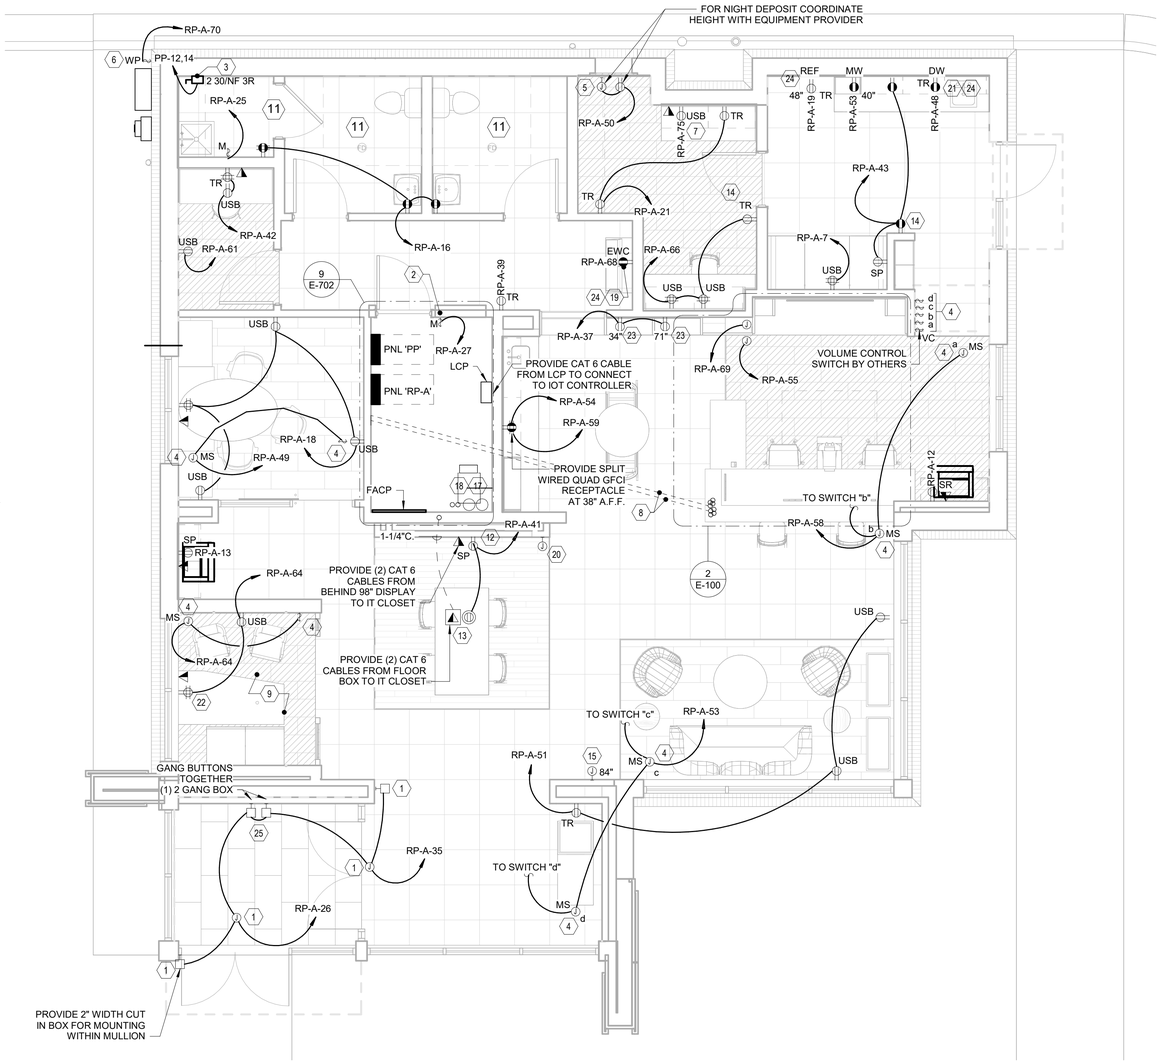

1 E-100 ELECTRICAL POWER & AUXILIARY PLAN
1/4" = 1'-0"

AUXILIARY - GENERAL NOTES:

1. ALL LOW VOLTAGE CONDUITS AND CABLING INCLUDING TELEPHONE, DATA, FIRE ALARM, AUXILIARY, ETC. SHOWN ON THESE PLANS ARE BY THE CONTRACTOR. SEE SHEET E001 "TELDATA" FOR ALL REQUIREMENTS.
2. ALL LOW VOLTAGE CABLES ABOVE ACCESSIBLE CEILING SHALL BE SUPPORTED WITH METALLIC JHOOKS FROM DEVICE LOCATIONS BACK TO THE TBB. WHERE CABLES ARE NOT ACCESSIBLE OR CONCEALED IN WALLS, THEY SHALL BE RUN IN EMT CONDUIT. JHOOKS SHALL BE SPACED SO THAT NO CABLE IS UNSUPPORTED FOR MORE THAN 5'0".

KEYED NOTES:

1. FOR POWER TO DOOR MOTOR AND DOOR PUSH PLATE. COORDINATE LOCATION OF DOOR POWER. PROVIDE 2" WIDTH CUTIN BOX FOR ALL PUSH PLATE MOUNTING WITHIN MULLION. VERIFY ALL REQUIRED CONNECTIONS PRIOR TO ROUGHIN.
2. FOR CONDENSATE PUMP.
3. 30/2 NF DISCONNECT FOR 2KW WATER HEATER, SEE RISER DIAGRAM.
4. RAISE/LOWER SWITCH FOR MECHOSHADES - COORDINATE LOCATION WITH ARCHITECT. THE INTERNET OF TEAM, LLC (IOT) WILL PROVIDE LOW VOLTAGE RAISE/LOWER SWITCHES, LINE VOLTAGE RELAY / MOTOR CONTROLLERS, THE SHADE SOLAR CONTROLLER (INTEGRAL AND PRE-INSTALLED INSIDE LCP) FOR THE ELECTRICAL CONTRACTOR (EC) TO INSTALL. IOT WILL PROVIDE MULTI GANG SWITCH OVER PLATES WHERE SHOWN AS GANGED SWITCH AND COVER PLATE SHALL BE BLACK WITHIN THE BOOTHS. EC SHALL PROVIDE WIRE, CONDUIT, AND ANCILLARY ITEMS NECESSARY TO INSTALL THE SYSTEM. TO COMPLETE THE SHADE CONTROL SYSTEM THE EC MUST PARTICIPATE IN POINT-TO-POINT COMMISSIONING AND RECEIVE SIGN-OFF WITH AN AGENT FROM IOT. REFERENCE IOT SHOP DRAWINGS FOR REQUIRED WIRE SPECIFICATIONS. REFERENCE IOT SHOP DRAWINGS FOR SHADE SYSTEM CONTROL DESIGN DETAILS AND INSTALLATION PROCEDURES. REFERENCE NEC AND LOCAL REQUIREMENTS FOR CONDUIT, FITTINGS, AND FIXTURES FOR CODE COMPLIANCE. COORDINATE ALL REQUIREMENTS WITH ARCHITECT, MECHOSHADE VENDOR, AND THE INTERNET OF TEAM, LLC
5. 4" SQUARE JUNCTION BOX MOUNTED ABOVE NIGHT DEPOSITORY WITH 3/4"C STUBBED ABOVE ACCESSIBLE CEILING FOR ALARM CONNECTION. ELECTRICALCONTRACTOR SHALL MAKE FINAL CONNECTION FROM JBOX TO NIGHT-DEPOSITORY. COORDINATE LOCATION WITH EQUIPMENT VENDOR PRIOR TO ROUGHIN.
6. WP SWITCH FOR DISCONNECTING MEANS OF IRRIGATION CONTROL VERIFY LOCATION PRIOR TO ROUGHIN. SWITCH AND CONTROLLER SHALL BE MOUNTED NEXT TO THE UTILITY METER.
7. USB OUTLET. PROVIDE USB TYPE-A & TYPE-C OUTLET, LEGRAND R26USBACWCCV6, OR EQUAL.
8. TRANSACTION BAR POWER AND DATA STUB-UP. PROVIDE UNDER SLAB CONDUITS AS FOLLOWS: (4) 3/4" IMC FOR POWER AND (4) 2" IMC WITH STRING FOR TELE/DATA TO ELEC/IT ROOM. SEE ENLARGED PLAN FOR DETAILS. ELECTRICAL CONTRACTOR SHALL COORDINATE EXACT LOCATION AND CONNECTION REQUIREMENTS WITH FURNITURE VENDOR AND ARCHITECT PRIOR TO ROUGH-IN.
9. ALL RECEPTACLES AND DATA OUTLETS AT BOOTHS, SHALL HAVE BLACK DEVICES AND COVER PLATES.
10. POWER FOR INDOOR HEAT PUMP UNITS IS DERIVED FROM OUTDOOR HEAT PUMP. ELECTRICAL CONTRACTOR SHALL PROVIDE AND INSTALL CONNECTIONBETWEEN EACH INDOOR AND OUTDOOR UNIT. ELECTRICAL CONTRACTOR SHALL CONNECT DISCONNECT SWITCH PROVIDED BY MECHANICAL FOR EACH UNIT.
11. CONNECT EXHAUST FAN TO LIGHTING CIRCUIT SERVING ROOM. FAN SHALL BE CONTROLLED BY ROOM LIGHT SWITCH.
12. FOR CONNECTION TO VIDEO SIGNAGE DISPLAY MONITORS IN TECH WALL. INDICATED JUNCTION BOXES SHALL BE DOUBLEGANG, DEEP JBOX, EACH WITH 2" EMT STUBBED ABOVE ACCESSIBLE CEILING, PROVIDE BUSHING AND LABELED. CONTRACTOR SHALL COORDINATE EXACT CABLING AND TERMINATIONS WITH VIDEO SIGNAGE PROVIDER AND ARCHITECT. COORDINATE LOCATION OF SIGNAGE PLAYER BOX WITH SIGNAGE PROVIDER. PROVIDE CABLING FROM PLAYER BOX TO DISPLAY MONITORS. VERIFY THATALL CONNECTIONS CAN REACH THE BOXES WHERE THEY ARE TERMINATED AND FED FROM WITHOUT INTERFERING WITH MONITORS. SEE DETAIL 6, SHEET E501 FOR ELEVATIONS.
13. FLOOR BOX - PWR & DATA (RECESSED): PROVIDE RECESSED FLOOR BOX LEGRAND WIREMOLD #RFBA4C30OG, RFBADP, RFBA24C4EXT, 2 HUB, RFBA6A, RFBAMAAP, 6CTC2GY (FLANGED COVER FOR CONCRETE FLOORS) WITH 3/4" IMC FOR POWER AND 1-1/4" IMC WITH PULL STRING FOR TELE/DATA TO ELECIT ROOM. ELECTRICAL CONTRACTOR SHALL COORDINATE EXACT LOCATION AND CONNECTION REQUIREMENTS WITH FURNITURE VENDOR AND ARCHITECT PRIOR TO ROUGH-IN.
14. FOR MONITOR. COORDINATE EXACT LOCATION, MOUNTING HEIGHT AND CONNECTIVITY WITH ARCHITECT PRIOR TO ROUGHIN. VERIFY MOUNTING WITH ARCHITECT.
15. PROVIDE DRIVE THRU ALERT LIGHT WHERE NOTED. COORDINATE ROUGH-IN REQUIREMENTS AND WIRING.
16. NOT USED.
17. STUB UP (2) 2" CONDUITS FROM VTM/ATM DRIVE THROUGH FOR EQUIPMENT DATA CONNECTION.
18. STUB UP (2) 4" CONDUITS FOR TELEPHONE SERVICE ENTRANCE. SEE SITE PLAN.
19. FOR E.W.C. COORDINATE MOUNTING HEIGHT AND EXACT ROUGH-IN LOCATION WITH PLUMBING FIXTURE SUBMITTAL.
20. PROVIDE RECESSED DOUBLE GANG BOX AND (1) CAT 6 CABLE FROM 7" TOUCHPANEL TO IT CLOSET MOUNT AT 44" TO THE CENTER OF THE BOX A.F.F.CONFIRM TOP OF PANEL IS NOT HIGHER THAN 46" A.F.F. TO THE TOP. THE RECESSED DOUBLE GANG BOX SHALL BE MOUNTED VERTICALLY U.O.N.
21. FOR DISHWASHER MOUNT OUTLET IN THE SPACE ADJACENT TO THE SPACE OCCUPIED BY THE DISHWASHER SO THAT THE FLEXIBLE CORD CAN PASS THROUGH THE OPENING. COORDINATE WITH GC FOR OPENING PLACEMENT
22. INSTALL POWER/DATA RECEPTACLE PER ARCHITECTURAL ELEVATIONS TO AVOID FURNITURE PLACEMENT.
23. RECEPTACLES AND COVER PLATES AT LIBRARY WALL SHALL BE BROWN. INSTALL HORIZONTAL AND COORDINATE WITH ARCHITECT AND REFERENCE ARCHITECTURAL ELEVATION DRAWINGS FOR MORE DETAIL.
24. GFCI PROTECTED CONTROLLED RECEPTACLE: CONTROLLED RECEPTACLE SHALL BE FED FROM A GFCI PROTECTED CIRCUIT BREAKER. PROVIDE FACTORY ENGRAVED COVER PLATE WITH 'GFCI PROTECTED' LABEL
25. 2-GANG DOOR PUSH PLATES. EC SHALL INSTALL AND POWER THE POWER SUPPLY (SUPPLIED BY DOOR COMPANY) ABOVE CEILING AND COORDINATE LOCATION OF DOOR POWER. PROVIDE 2-GANG ELECTRICAL BOX FOR PUSH PLATE. VERIFY ALL REQUIRED CONNECTIONS PRIOR TO ROUGH-IN.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041408 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL POWER & AUXILIARY PLAN

Sheet Number:
E-100

6/30/2026 2:32:01 PM