


2 / E-101 ROOF DISCONNECT MOUNTING DETAIL
N.T.S.

ROOF DISCONNECT MOUNTING DETAILS KEYNOTES:

1. DISCONNECT SWITCH SHALL BE LOCATED ADJACENT TO (NOT ATTACHED TO) EQUIPMENT AND MEET WORKING CLEARANCES.
2. WEATHERPROOF "LB" CONDUIT TO TRANSITION TO LMFC.
3. HVAC EQUIPMENT FEEDER IN IMC CONDUIT.
4. PROVIDE PITCH POCKET FOR ALL CONDUIT PENETRATIONS.
5. WHERE A RECEPTACLE IS SHOWN ON A UNIT, RECEPTACLE OUTLET WITHIN 25 FT. OF EQUIPMENT WITH AN OUTLET BOX HOOD. RECEPTACLE TO BE GFCI PROTECTED.
6. LFMC PER SPECS WITHIN 12" OR LESS OF THE CONNECTION POINT OF THE UNIT.
7. SUPPORT RACEWAY WITH GALVANIZED MULTISTRUT PIPE CLAMP WHERE RUN UP THE UNITSTRUT.
8. ATTACH UNISTRUT TO CURB (NOT EQUIPMENT AND FLASHING). SEAL ALL PENETRATIONS.
9. UV RESISTANT UNISTRUT SUPPORT BASE. TYPICAL.
10. ADDITIONAL UNITSTRUT SUPPORT PERPENDICULAR TO THE UNISTRUT THAT THE DISCONNECT IS ATTACHED TO.
11. UNISTRUT SUPPORT ADDED AT 45 DEGREE ANGLE FOR ADDITIONAL SUPPORT.

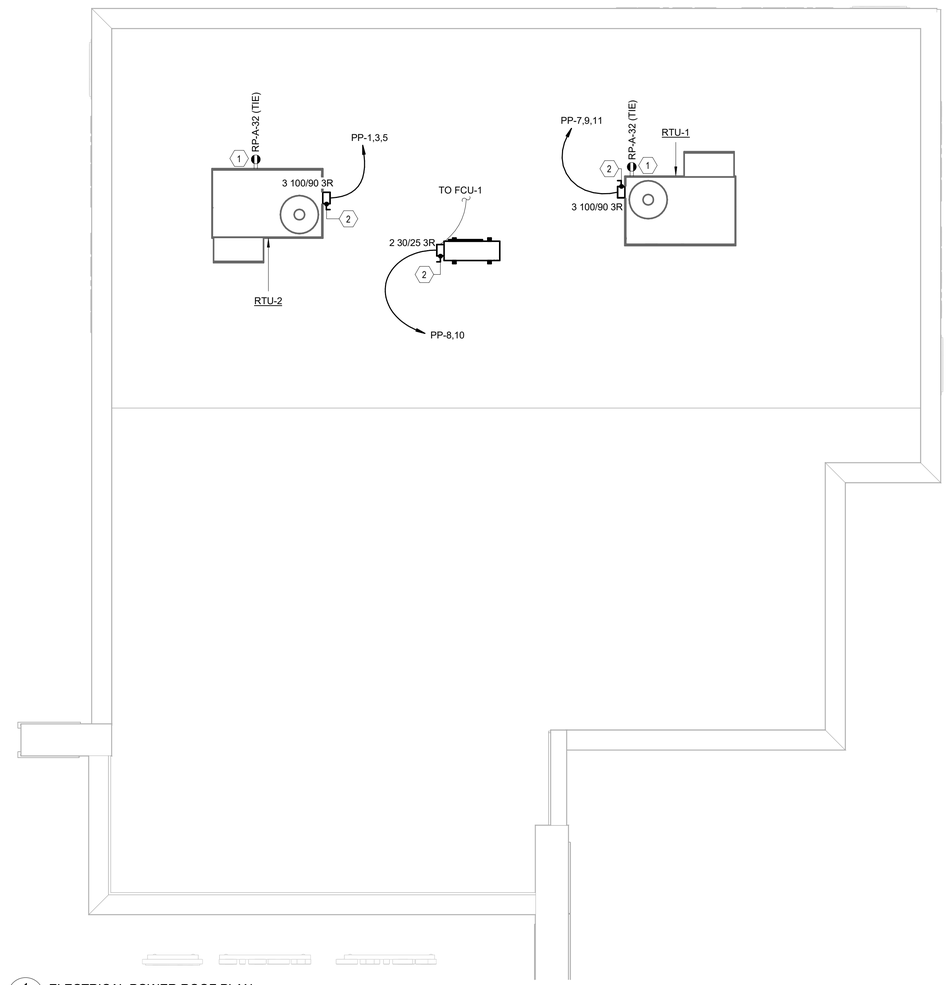

1 / E-101 ELECTRICAL POWER ROOF PLAN
1/4" = 1'-0"

SHEET NOTES:

1. EXACT LOCATIONS OF MECHANICAL EQUIPMENT AND THEIR ELECTRICAL CONNECTIONS SHALL BE COORDINATED WITH MECHANICAL CONTRACTOR. ELECTRICAL CONNECTIONS TO ROOF TOP EQUIPMENT SHALL BE ROUTED WITHIN ROOF CURB
2. COORDINATE WITH MECHANICAL CONTRACTOR FOR MECHANICAL EQUIPMENT DISCONNECT SWITCH RESPONSIBILITIES. FINAL ELECTRICAL INSTALLATION AND CONNECTIONS BY ELECTRICAL CONTRACTOR.
3. PROVIDE APPROPRIATE TRIM RING AND 3/4" CONDUIT WITH INSULATED CONDUIT BUSHINGS AND PULL STRING TO ACCESSIBLE CEILING FOR EACH THERMOSTAT. REFER TO MECHANICAL PLAN FOR THERMOSTAT QUANTITIES AND LOCATIONS. IN AREAS WITH OPEN CEILINGS, A COMPLETE CONDUIT SYSTEM SHALL BE PROVIDED FROM THE THERMOSTAT TO THE MECHANICAL UNIT; FREE WIRING IS NOT ACCEPTABLE.
4. ELECTRICAL CONTRACTOR'S BID SHALL INCLUDE POWER TO ALL MISCELLANEOUS MECHANICAL AND PLUMBING EQUIPMENT ACCESSORIES AND AUXILIARY LOADS WHICH MAY NOT BE REFLECTED IN THE ELECTRICAL PLANS BUT NECESSARY FOR A COMPLETE AND FULLY FUNCTIONING SYSTEM. NO CHANGE ORDERS WILL BE CONSIDERED.

KEYED NOTES:

1. MAINTENANCE RECEPTACLE: PROVIDE 20A, 120V GFCI WEATHERPROOF/WEATHER-RESISTANT RECEPTACLE WITH METALLIC WHILE-IN-USE COVER IF NOT PROVIDED BY RTU MANUFACTURER. PROVIDE POWER CONNECTIONS AS REQUIRED BY RTU MANUFACTURER
2. MECHANICAL UNIT DISCONNECT SWITCH: PROVIDE NEMA 3R FUSIBLE DISCONNECT SWITCH. REFER TO "ROOF DISCONNECT MOUNTING DETAIL" ON THIS SHEET FOR MORE DETAILS.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com



Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK
WATSON
1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL POWER ROOF PLAN

Sheet Number:
E-101

6/30/2026 2:32:02 PM