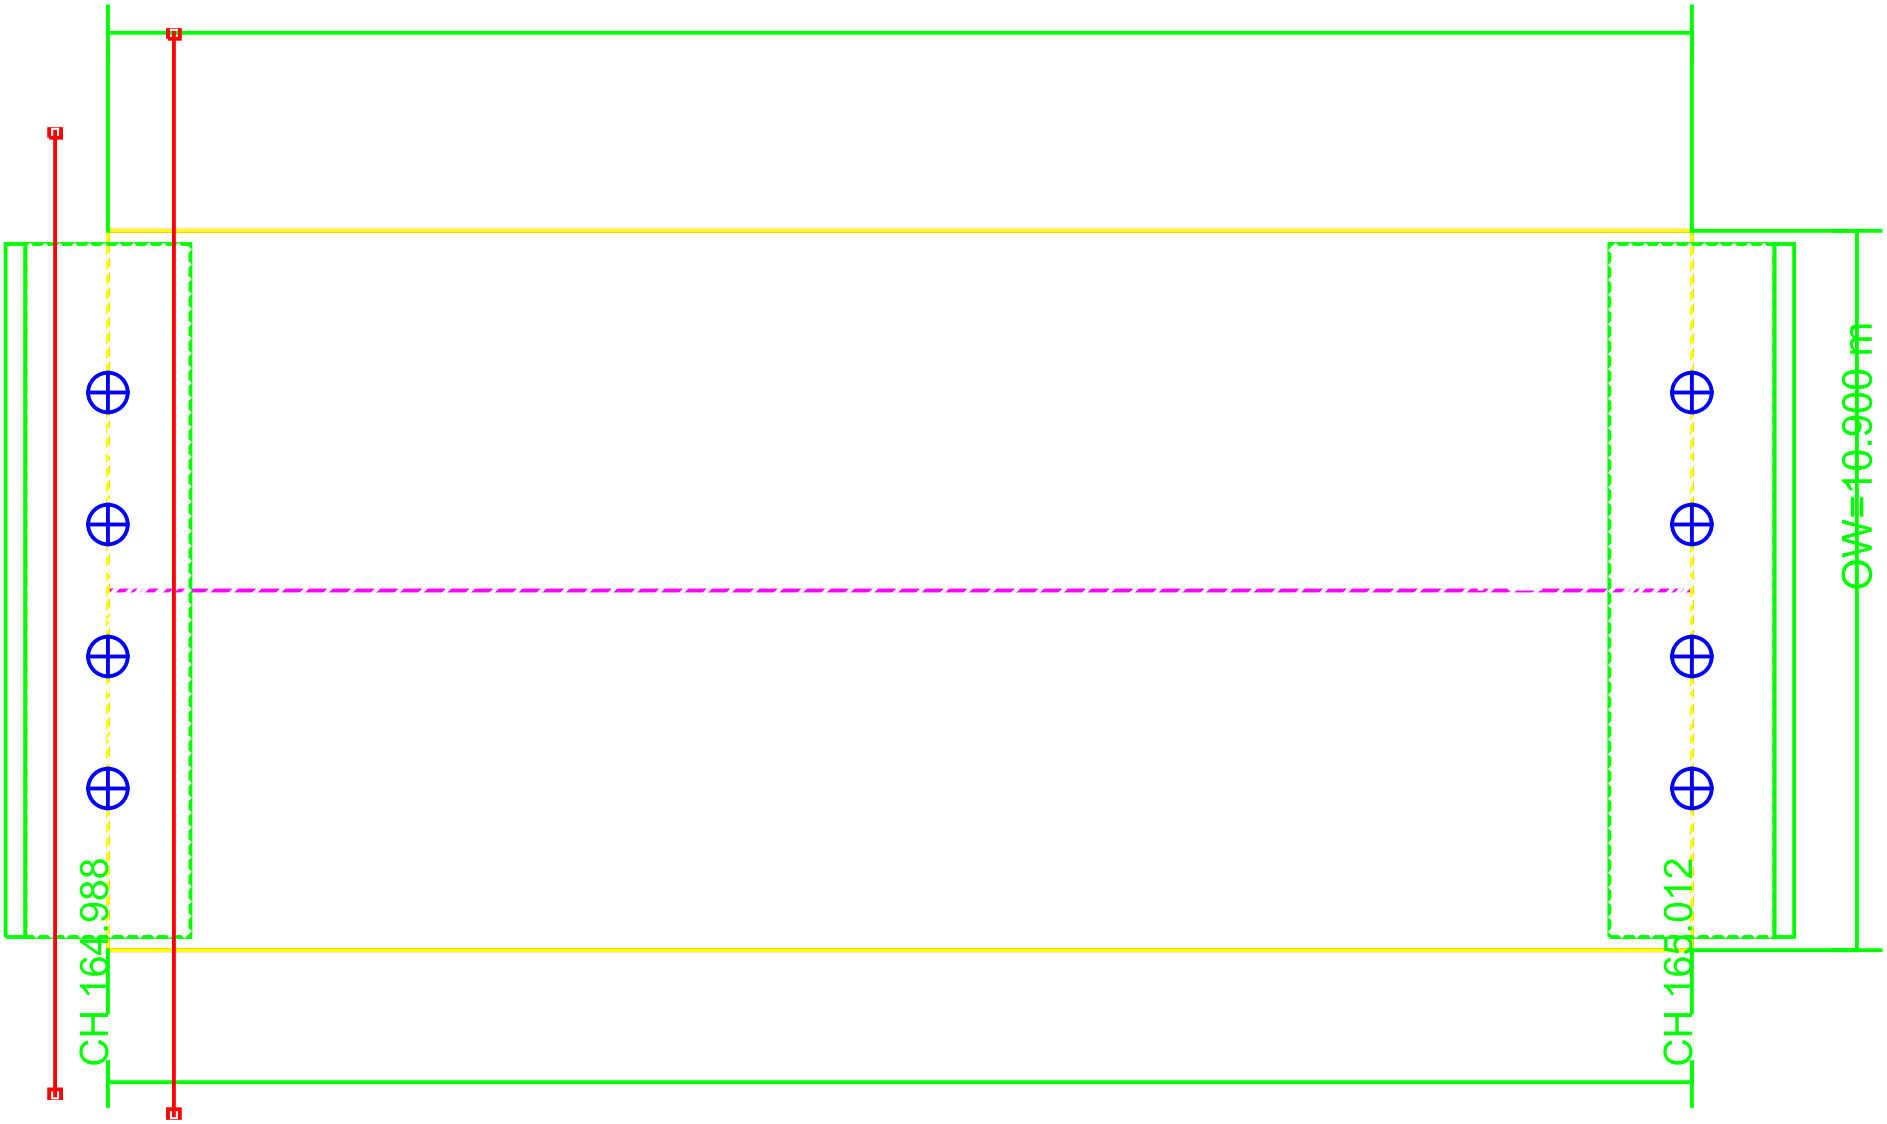

A-A

B-B

Total L = 24.000 m

(Not to Scale — indicative 1:100)

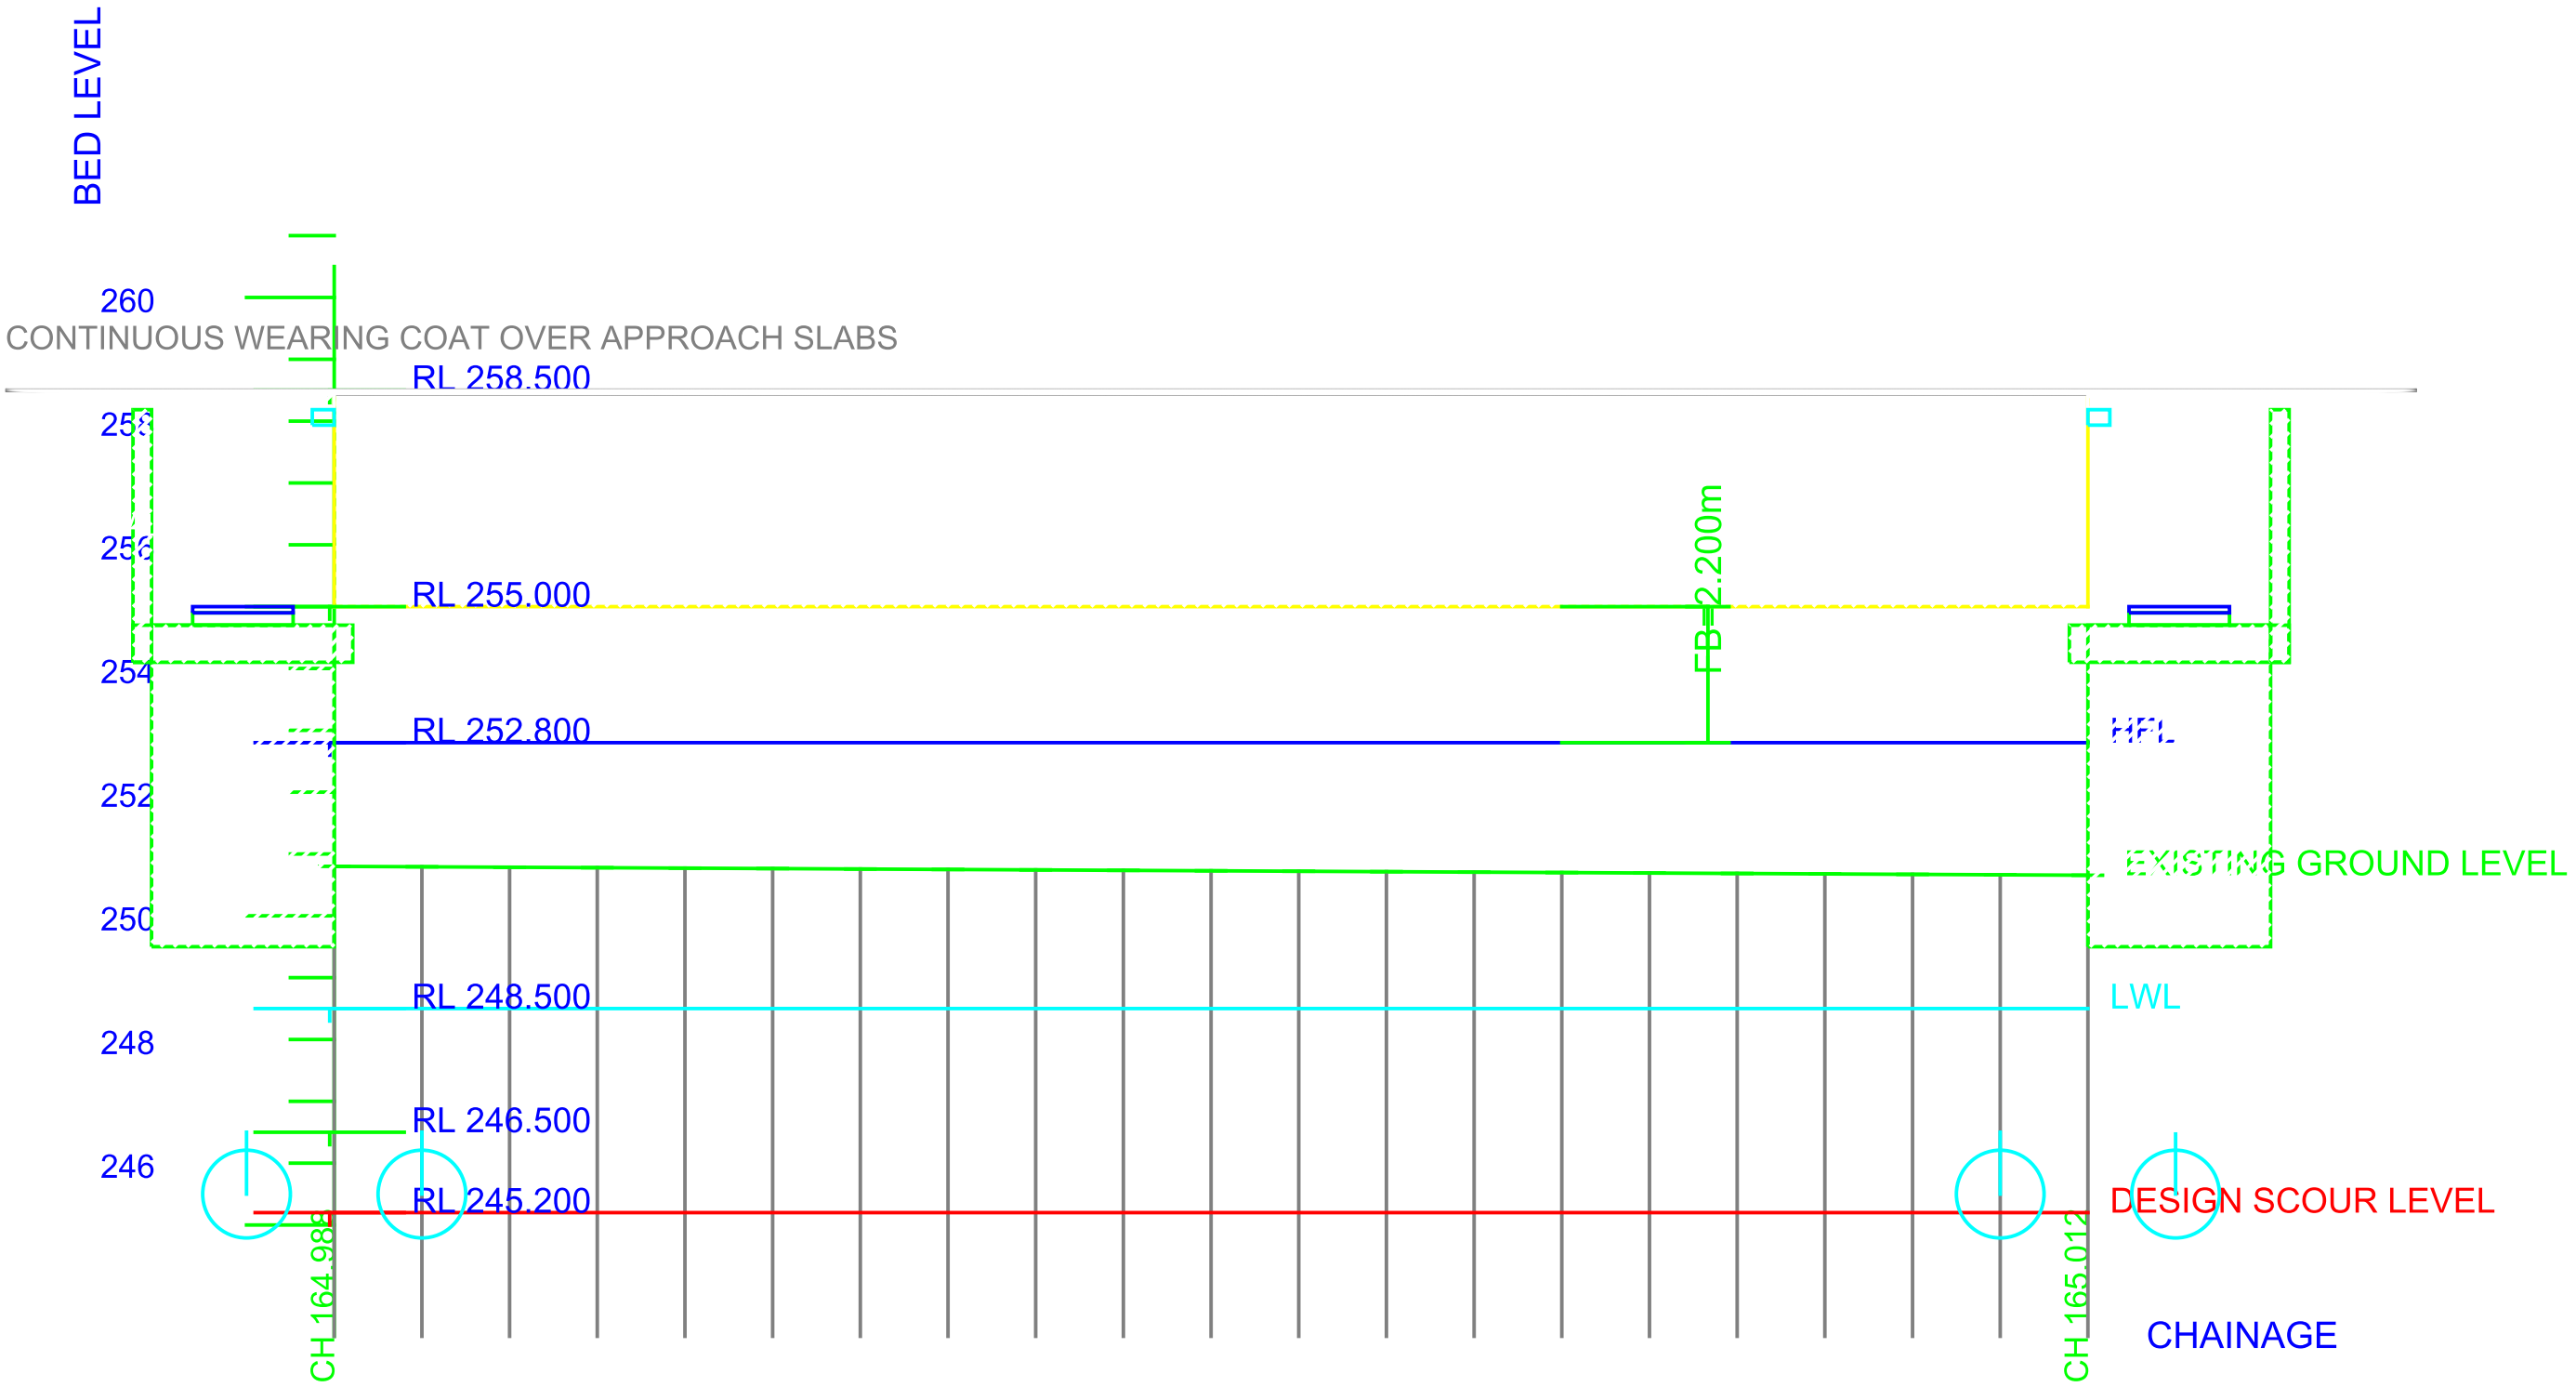

(Not to Scale — indicative)

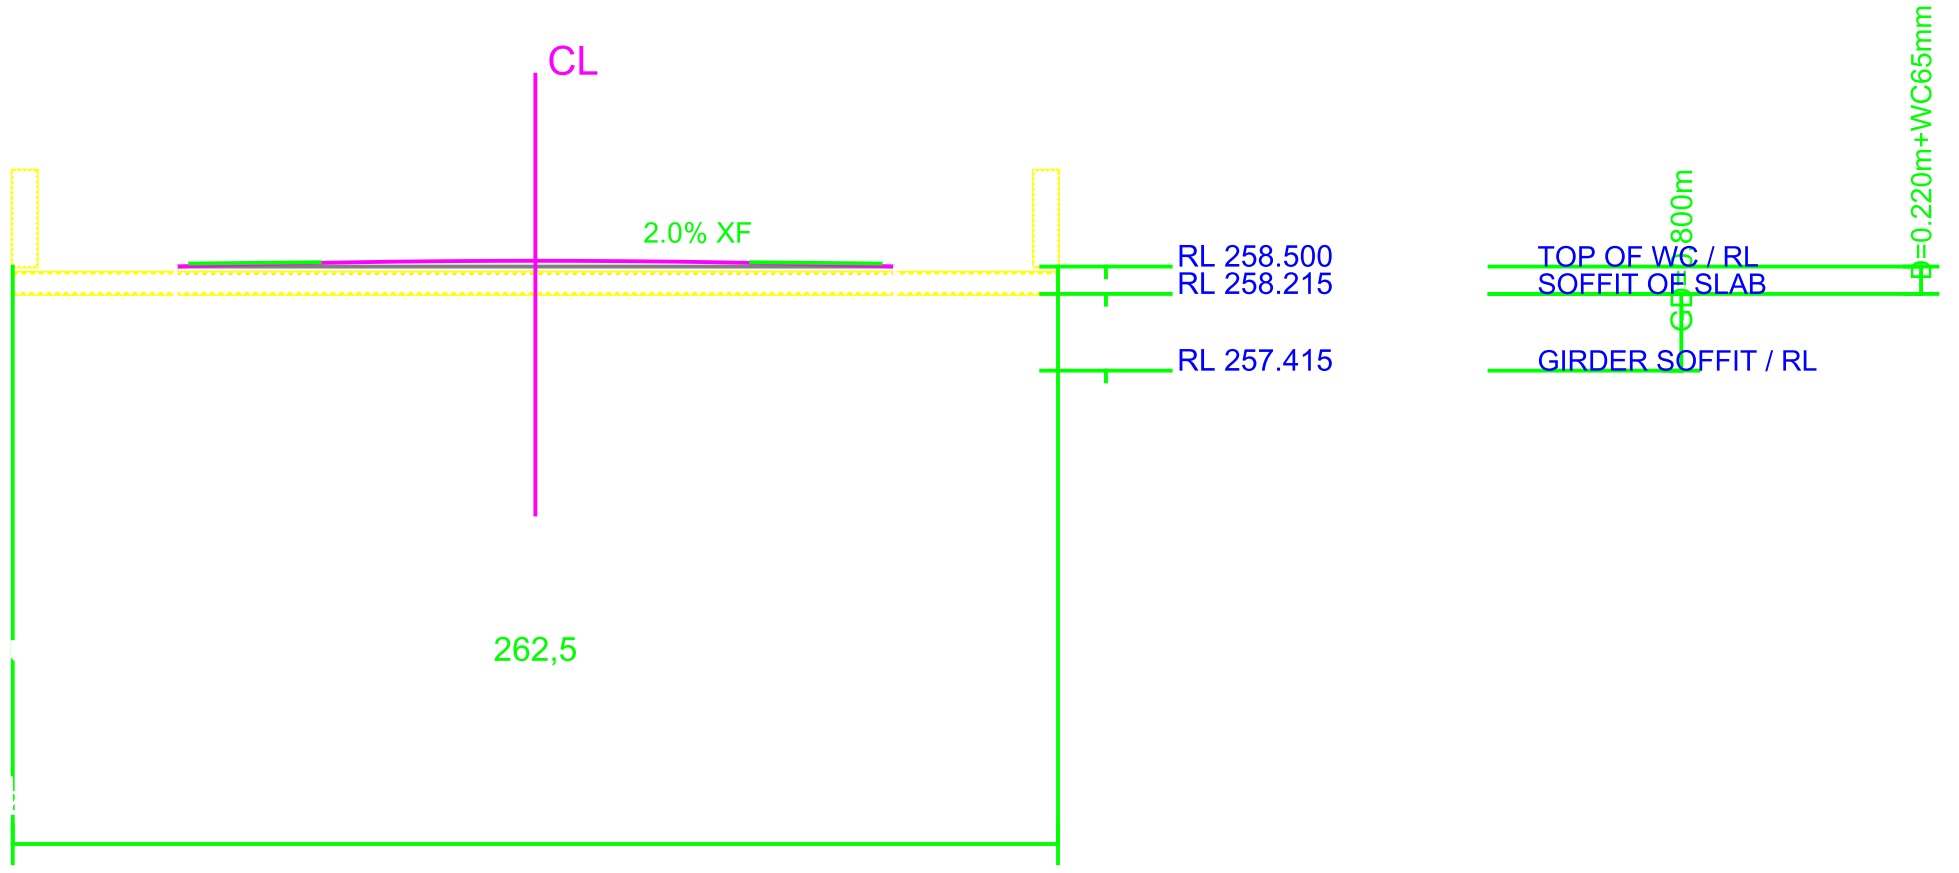
CL
2.0% XF
RL 258.500
RL 258.215
RL 257.415
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GB=0.800m
D=0.220m+WC65mm
262,5

DESIGN SCOUR RL 245.200







[illegible]







QA-ABT-CAP-DEF	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PR	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	3.48 m	>= 0.35 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	2.23	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.80	>= 1.40	OK
QA-ABT-BRG	Base pressure	409.89 kPa	<= 600.00 kPa	OK

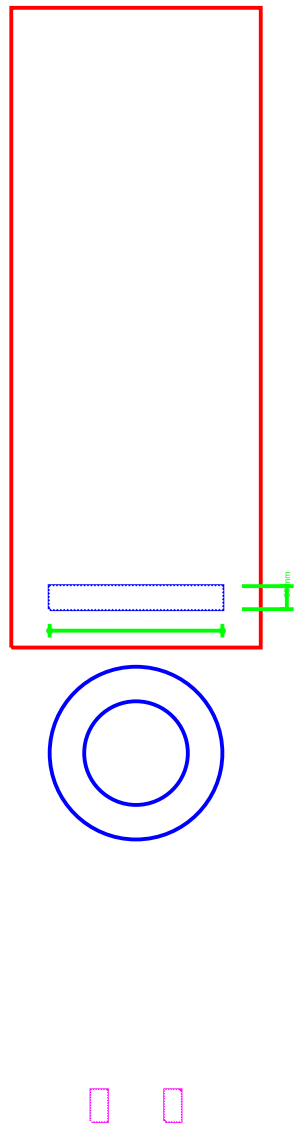

GAP

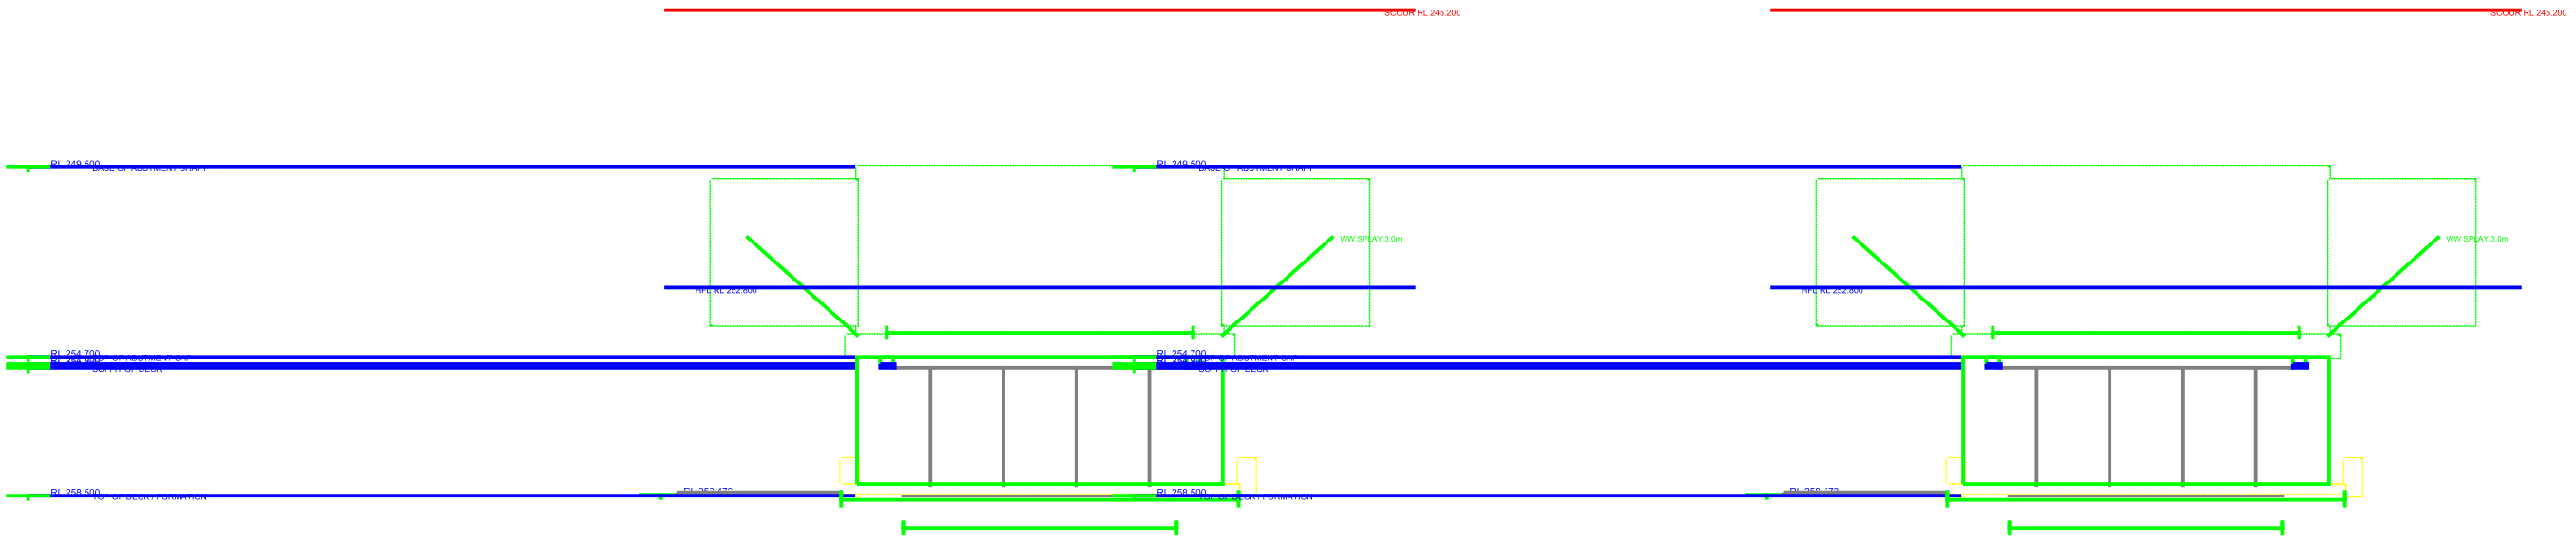

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	3.48 m	>= 0.35 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	2.23	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.80	>= 1.40	OK
QA-ABT-BRG	Base pressure	409.89 kPa	<= 600.00 kPa	OK

(Not to Scale - indicative) LTER (BEYOND)