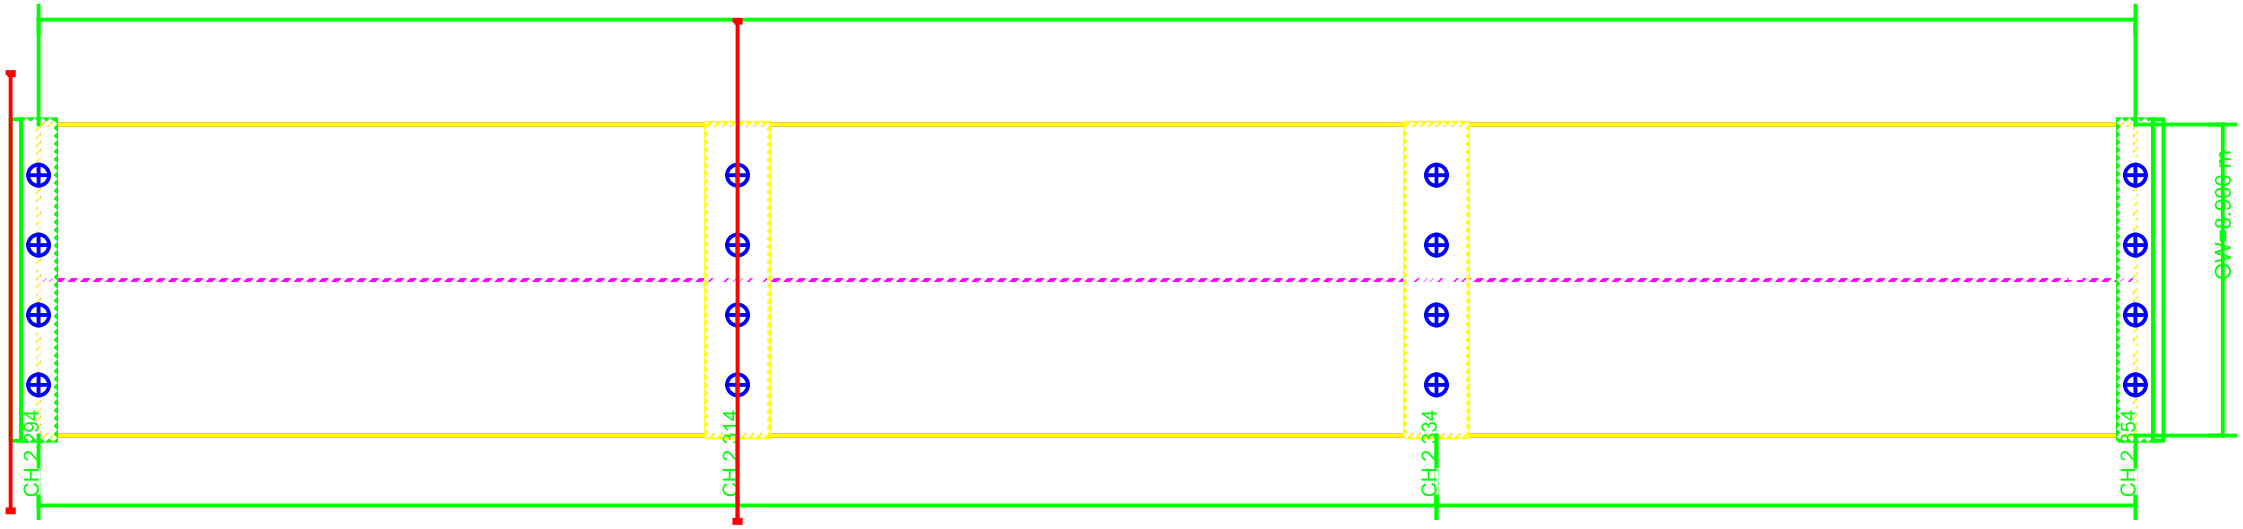

A-A

B-B

[illegible] = 60.000 m

(Not to Scale — indicative 1:100)

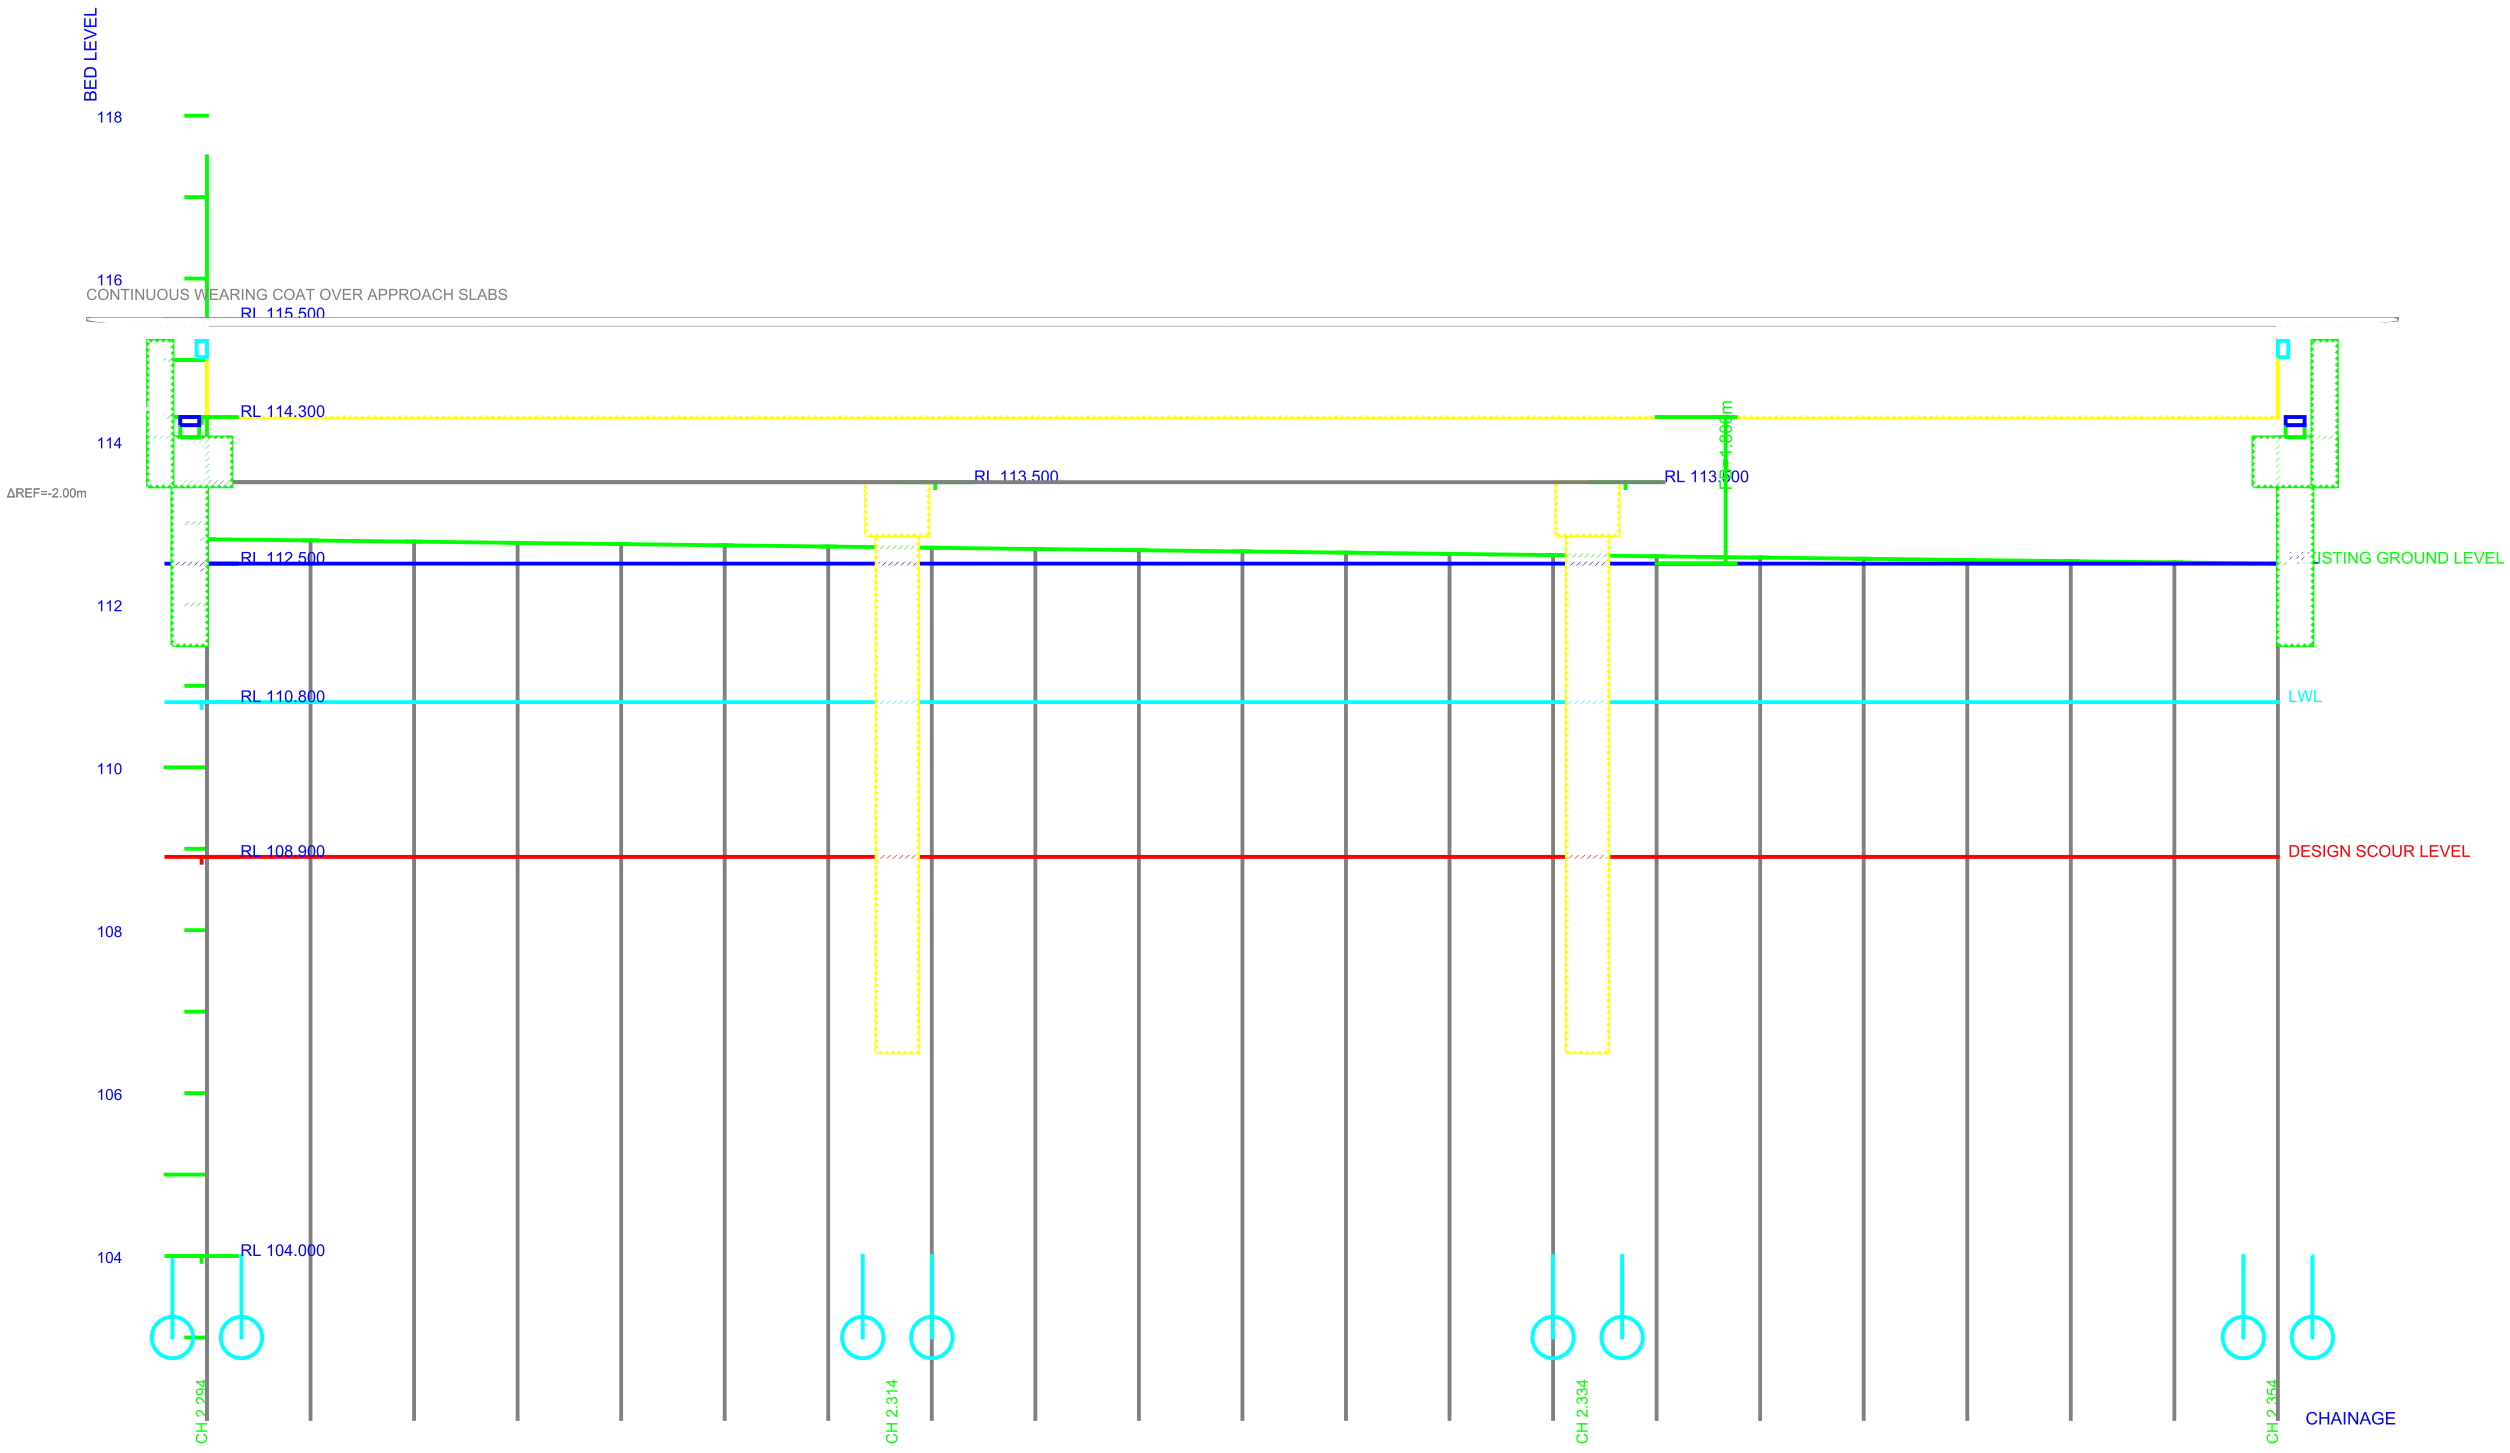

(Not to Scale — indicative)

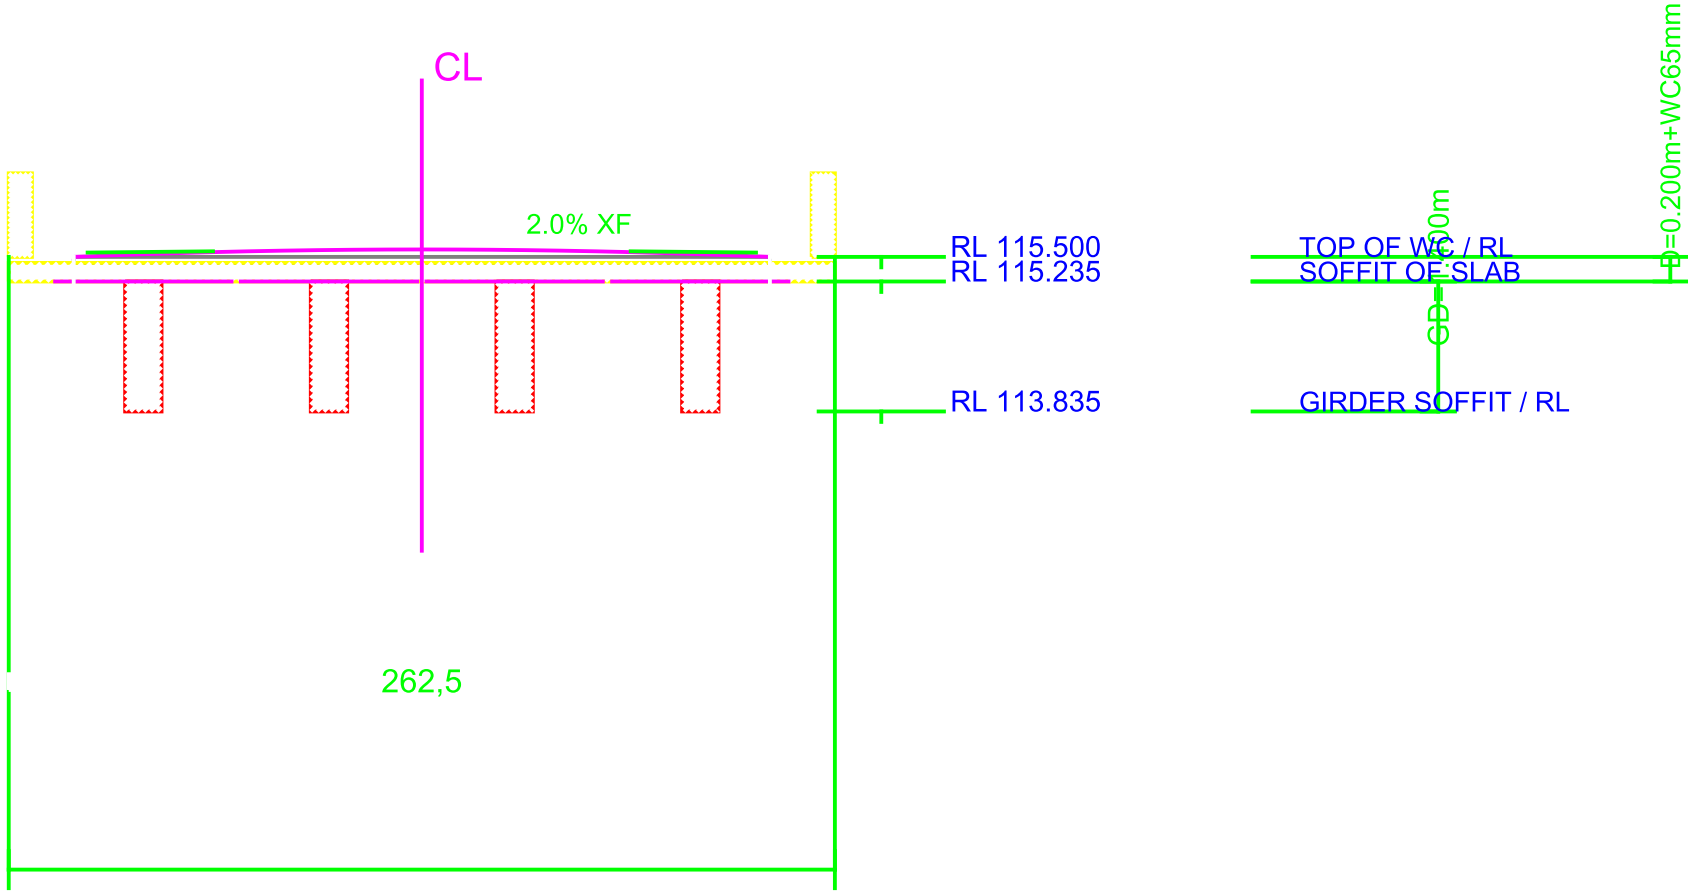
CL
2.0% XF
RL 115.500
RL 115.235
RL 113.835
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GD=
D=0.200m+WC65mm
262,5

DESIGN SCOUR RL 108.900







[illegible]





QA-ABT-CAP-DE	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PR	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 550.00 kPa	OK



[illegible]

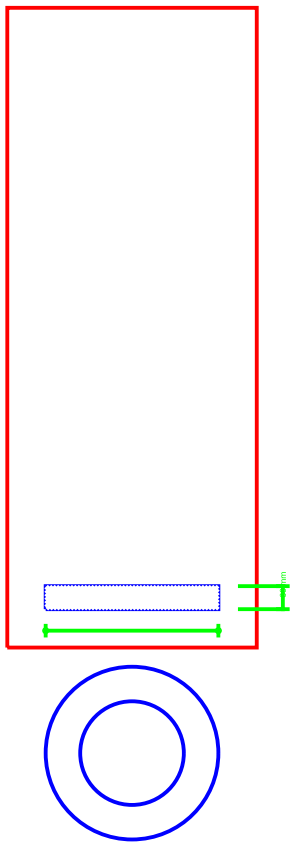

GAP

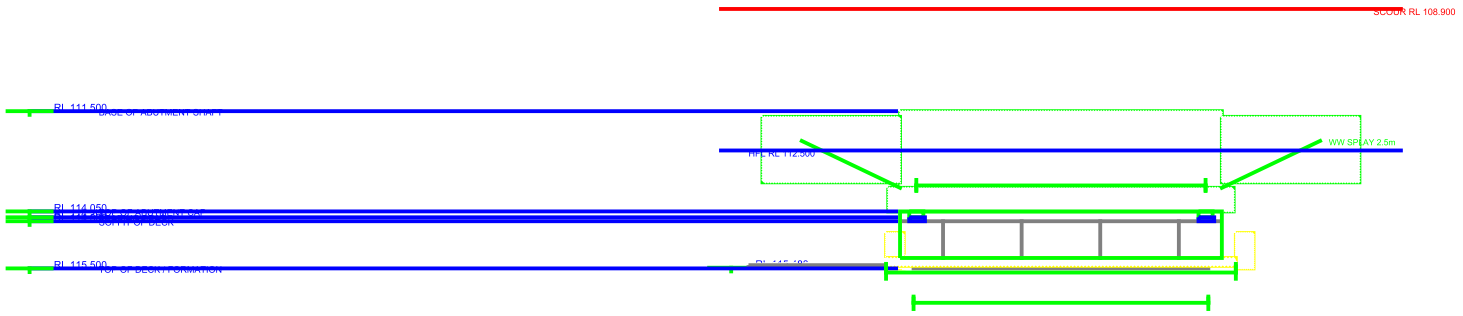

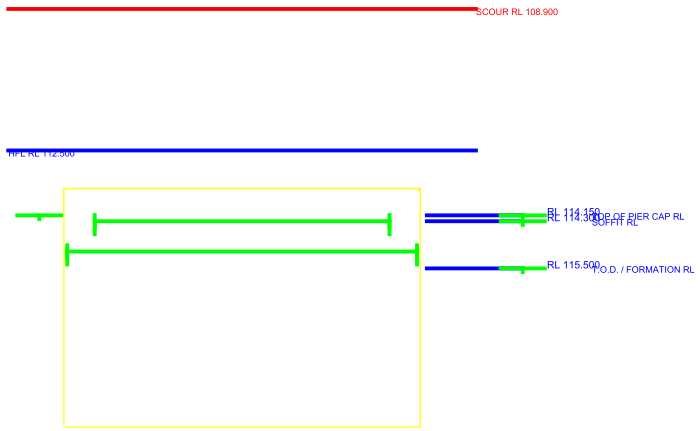

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEI	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 550.00 kPa	OK

(Not to Scale — indicative). [illegible] TER (BEYOND)