

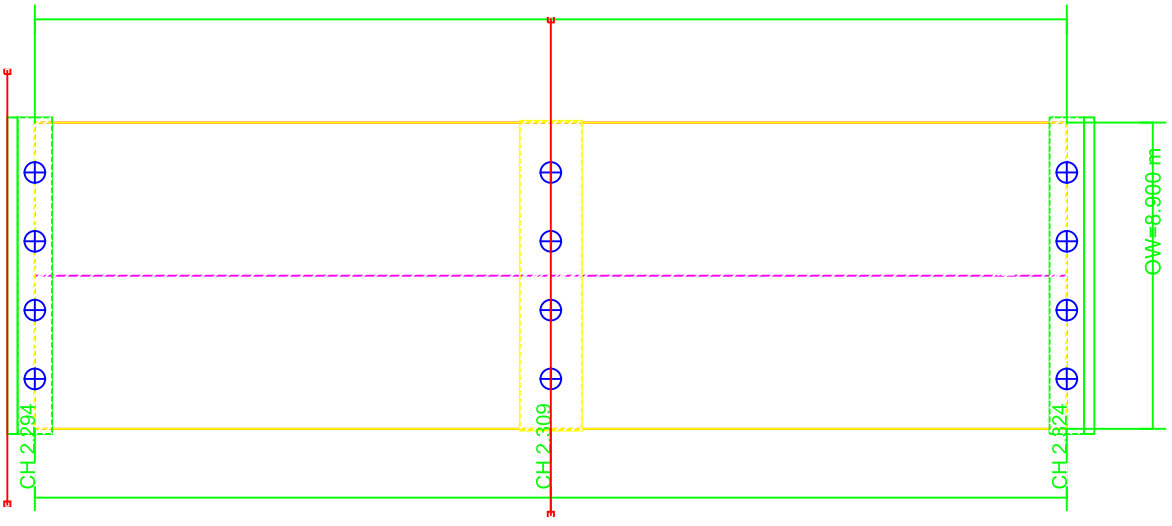
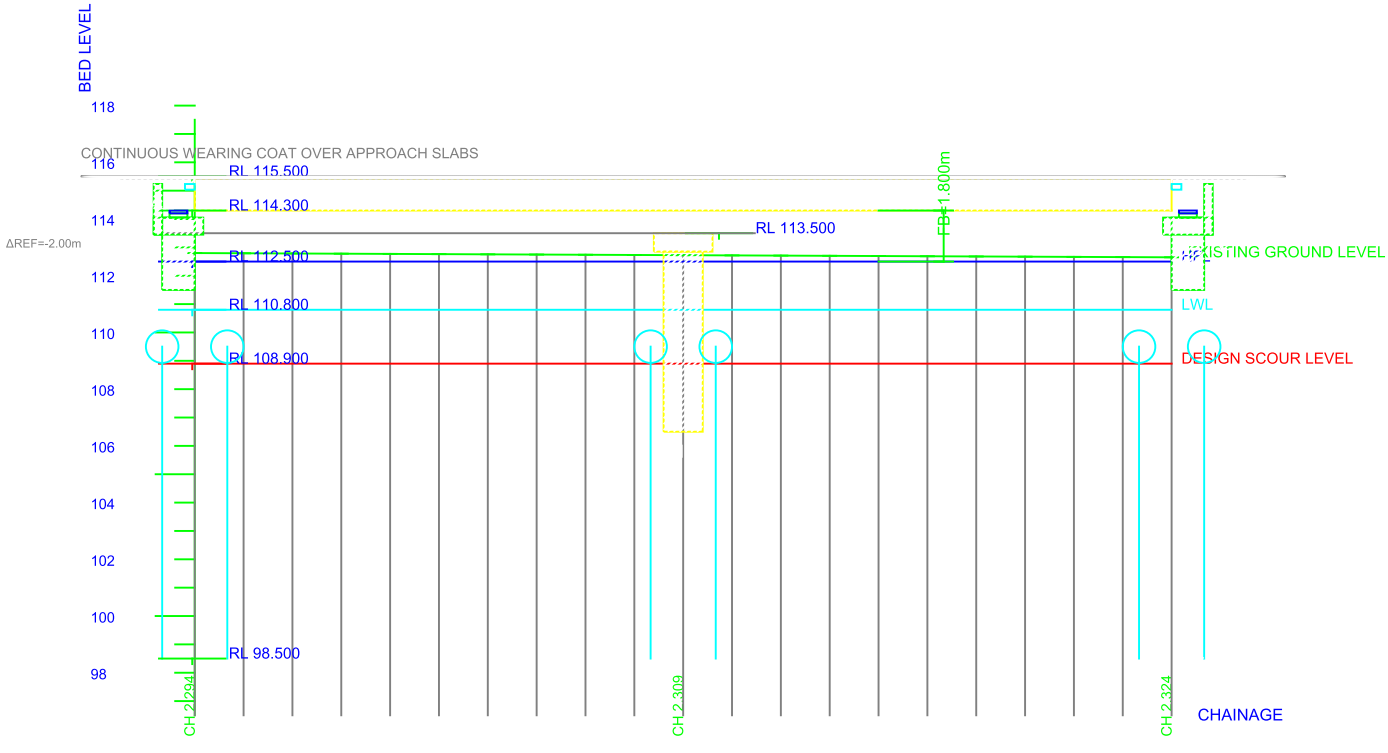



(Drawing Scale - Indicative 1:100)

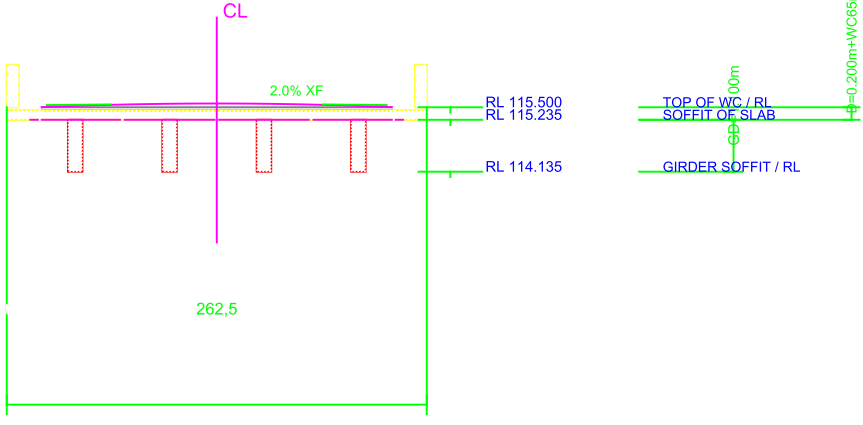



(Not to Scale — indicative)



CL
2.0% XF
RL 115.500
RL 115.235
RL 114.135
262,5
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
D=0.200m+WC65mm




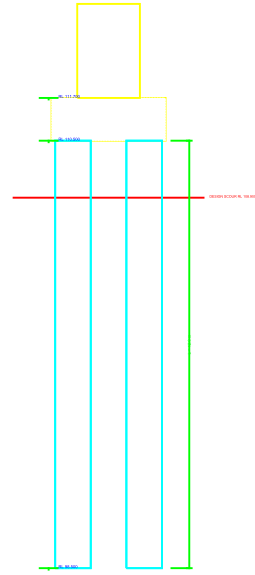

EL. 111.750
EL. 110.500
DESIGN SCOUR EL. 108.000
EL. 90.000









150
150
150

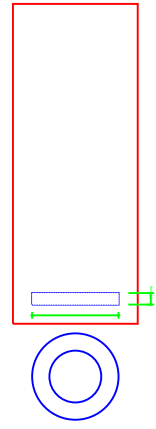

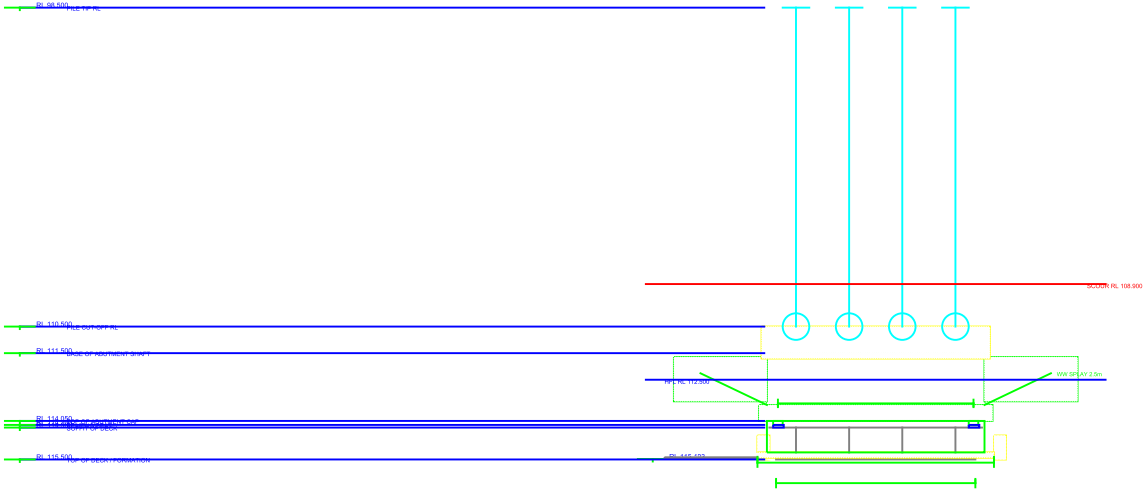

QA-ABT-C Shaft/pile cap depth	0 mm	>= 450 mm	OK
QA-ABT-C Clear projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-TI Brick wall thickness	0 mm	>= 250 mm	OK
QA-DW-TI Brick wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-W Weep holes provided	4	1 per 3 m	OK
QA-ABT-E Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-S Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-B Base pressure	159.91 kPa	<= 350.00 kPa	OK

(Not to scale – indicative)