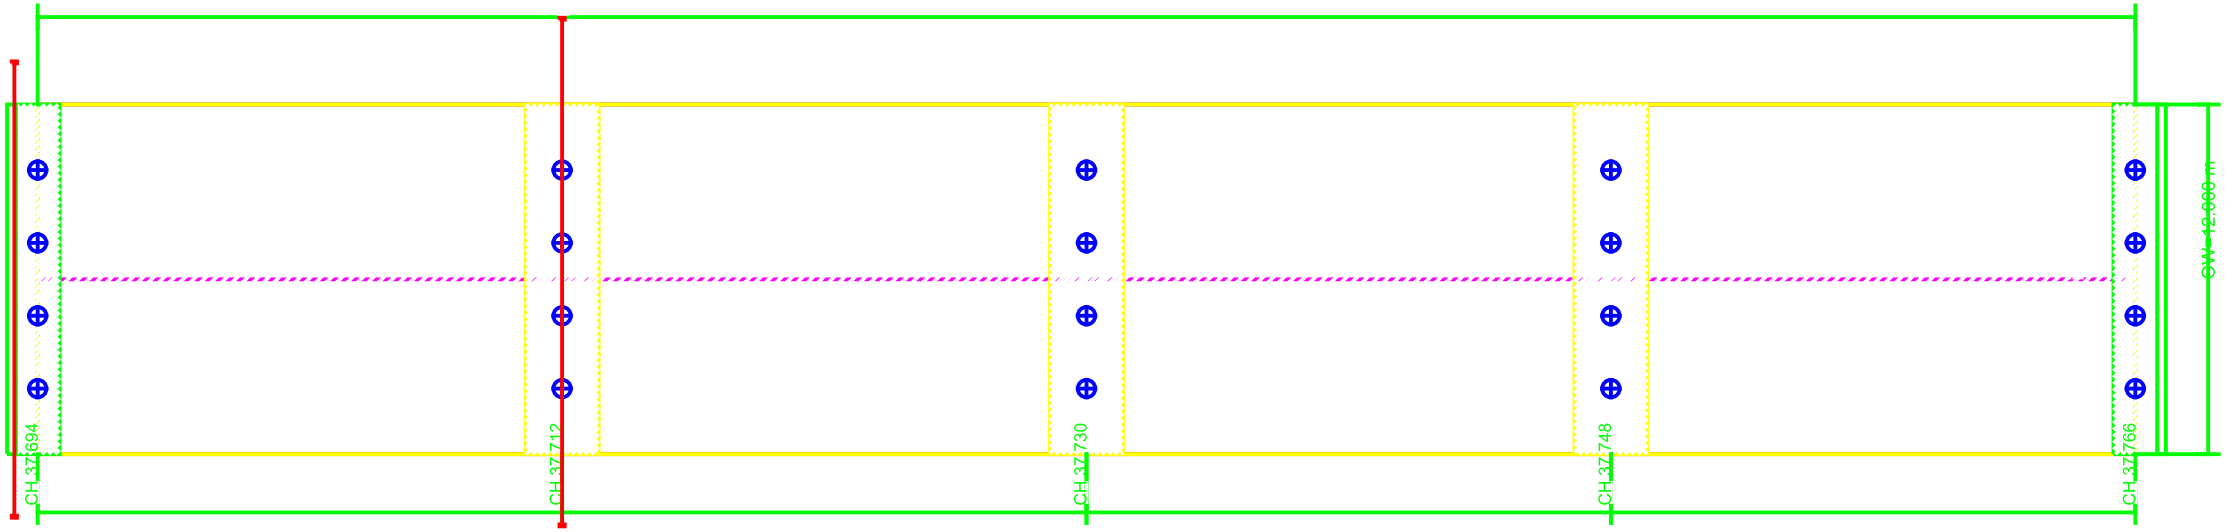

A-A

B-B

L = 72.000 m

(Not to Scale — Indicative 1:100)

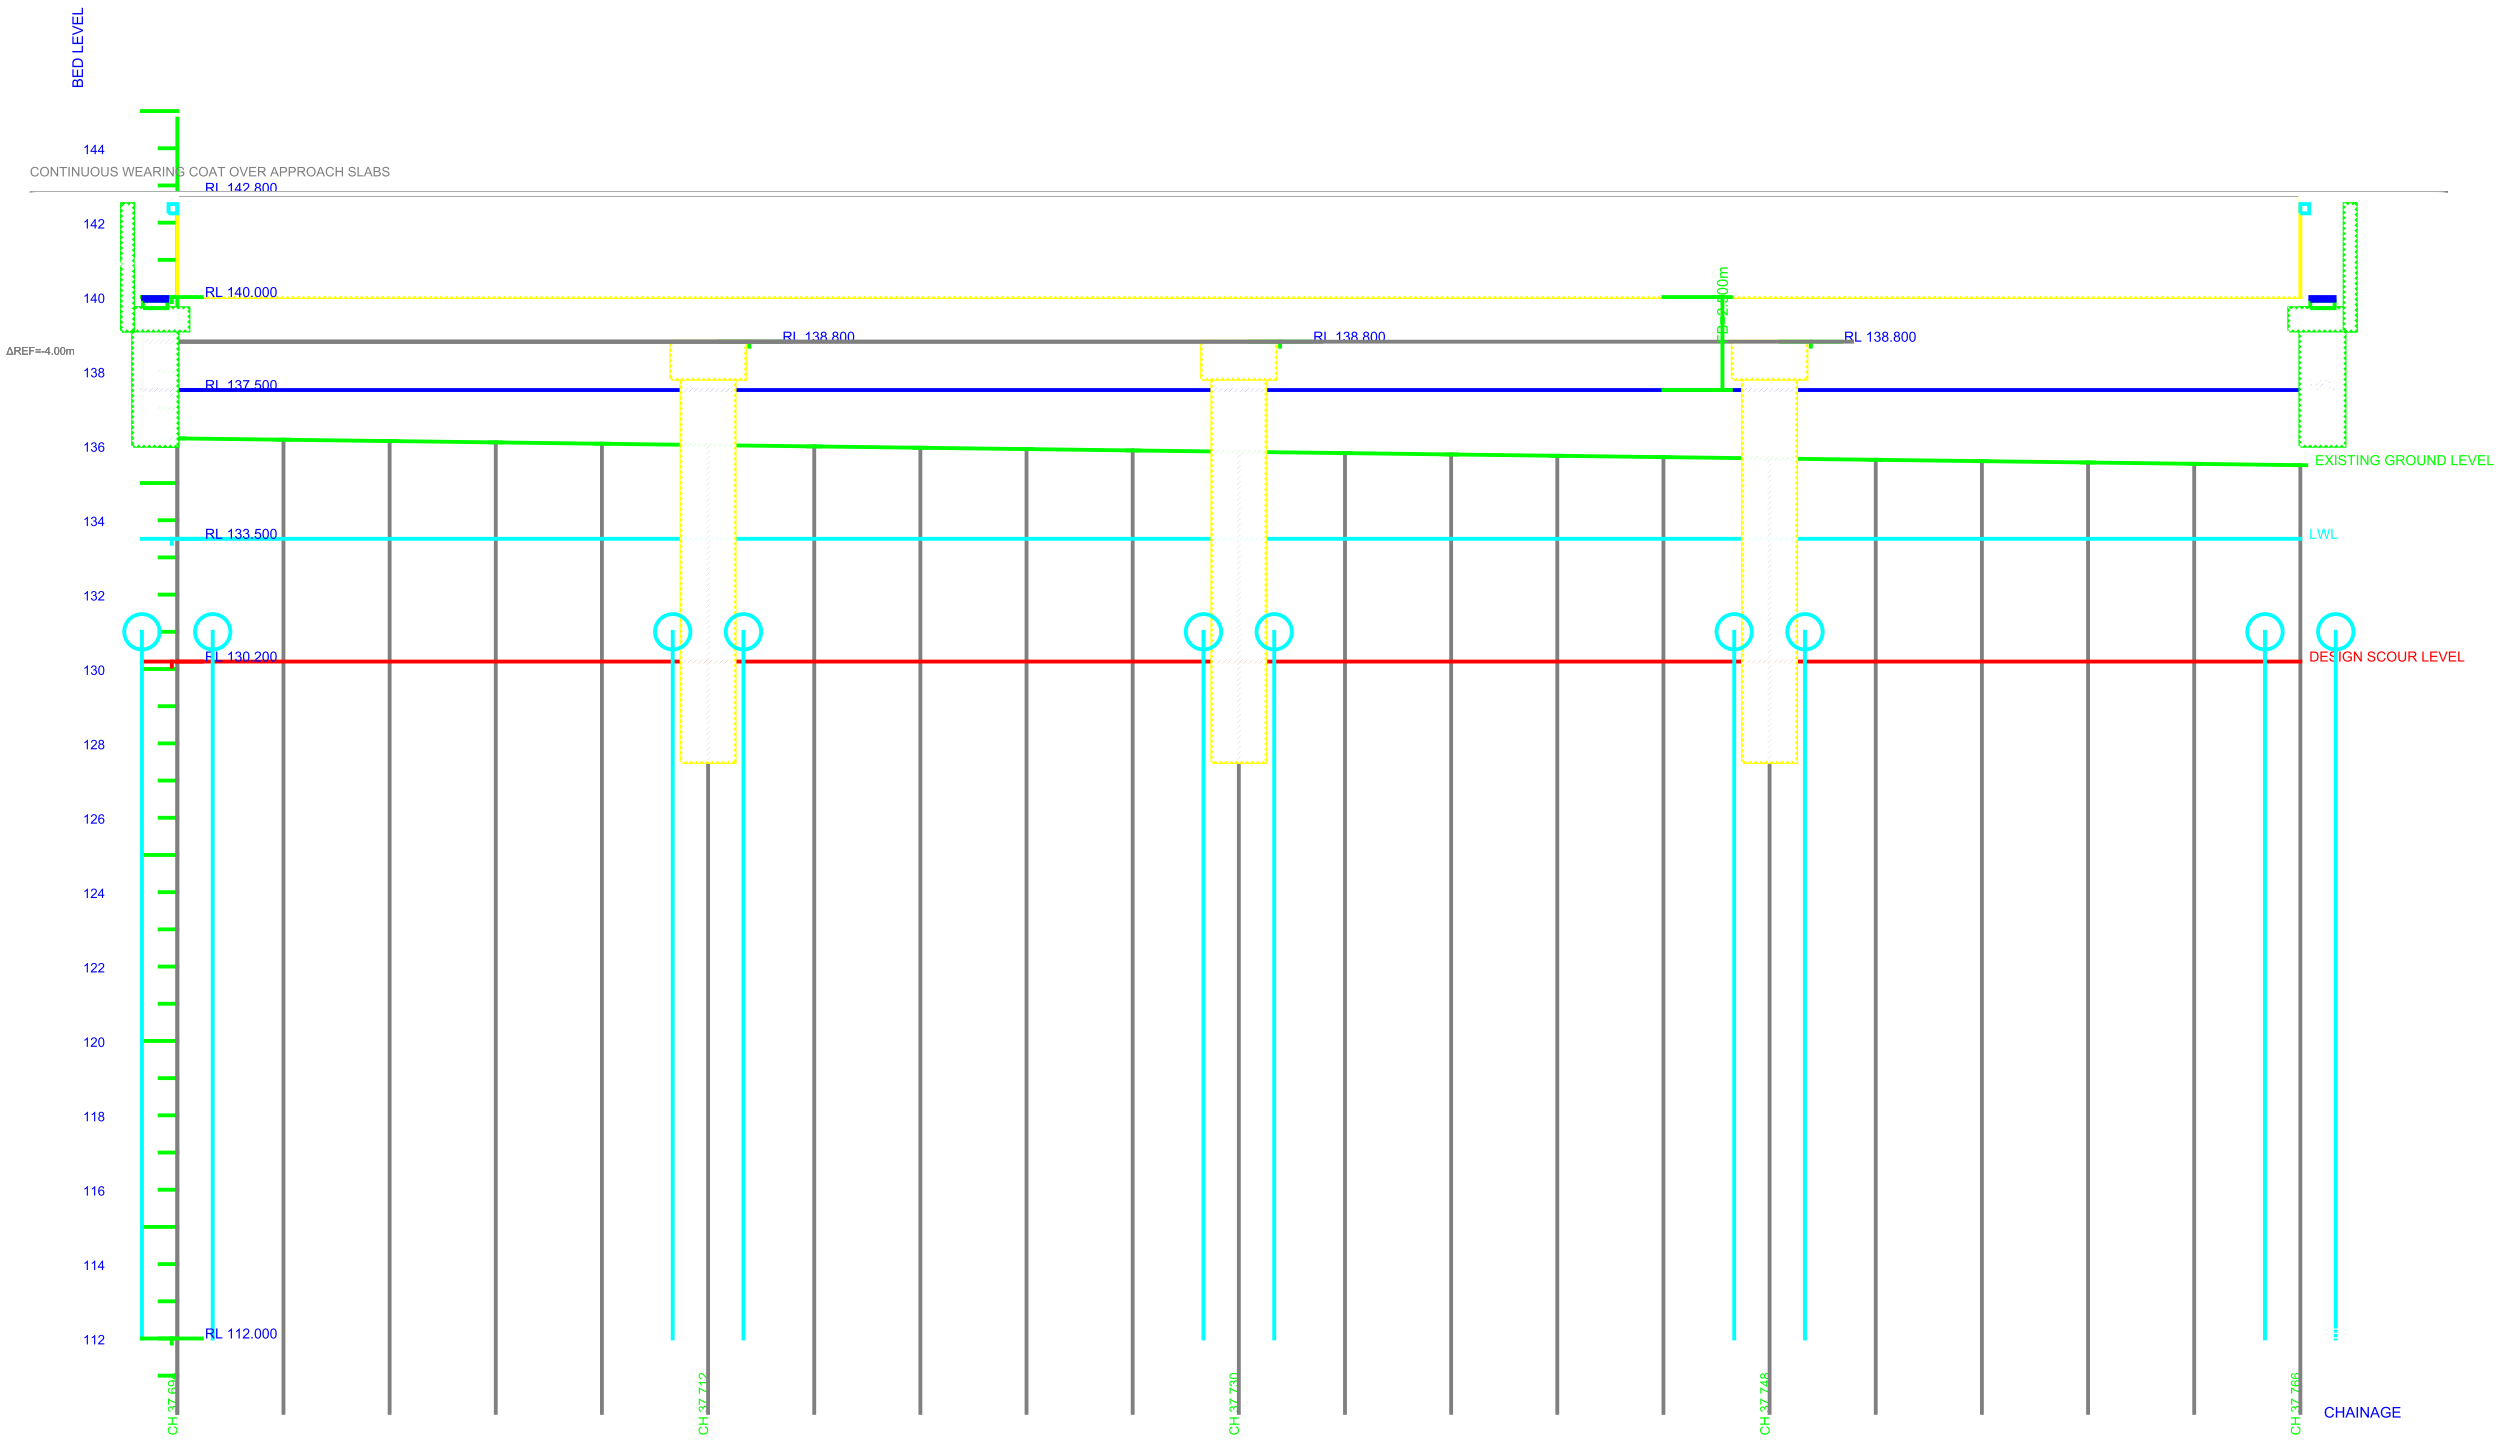

(Not to Scale — indicative)

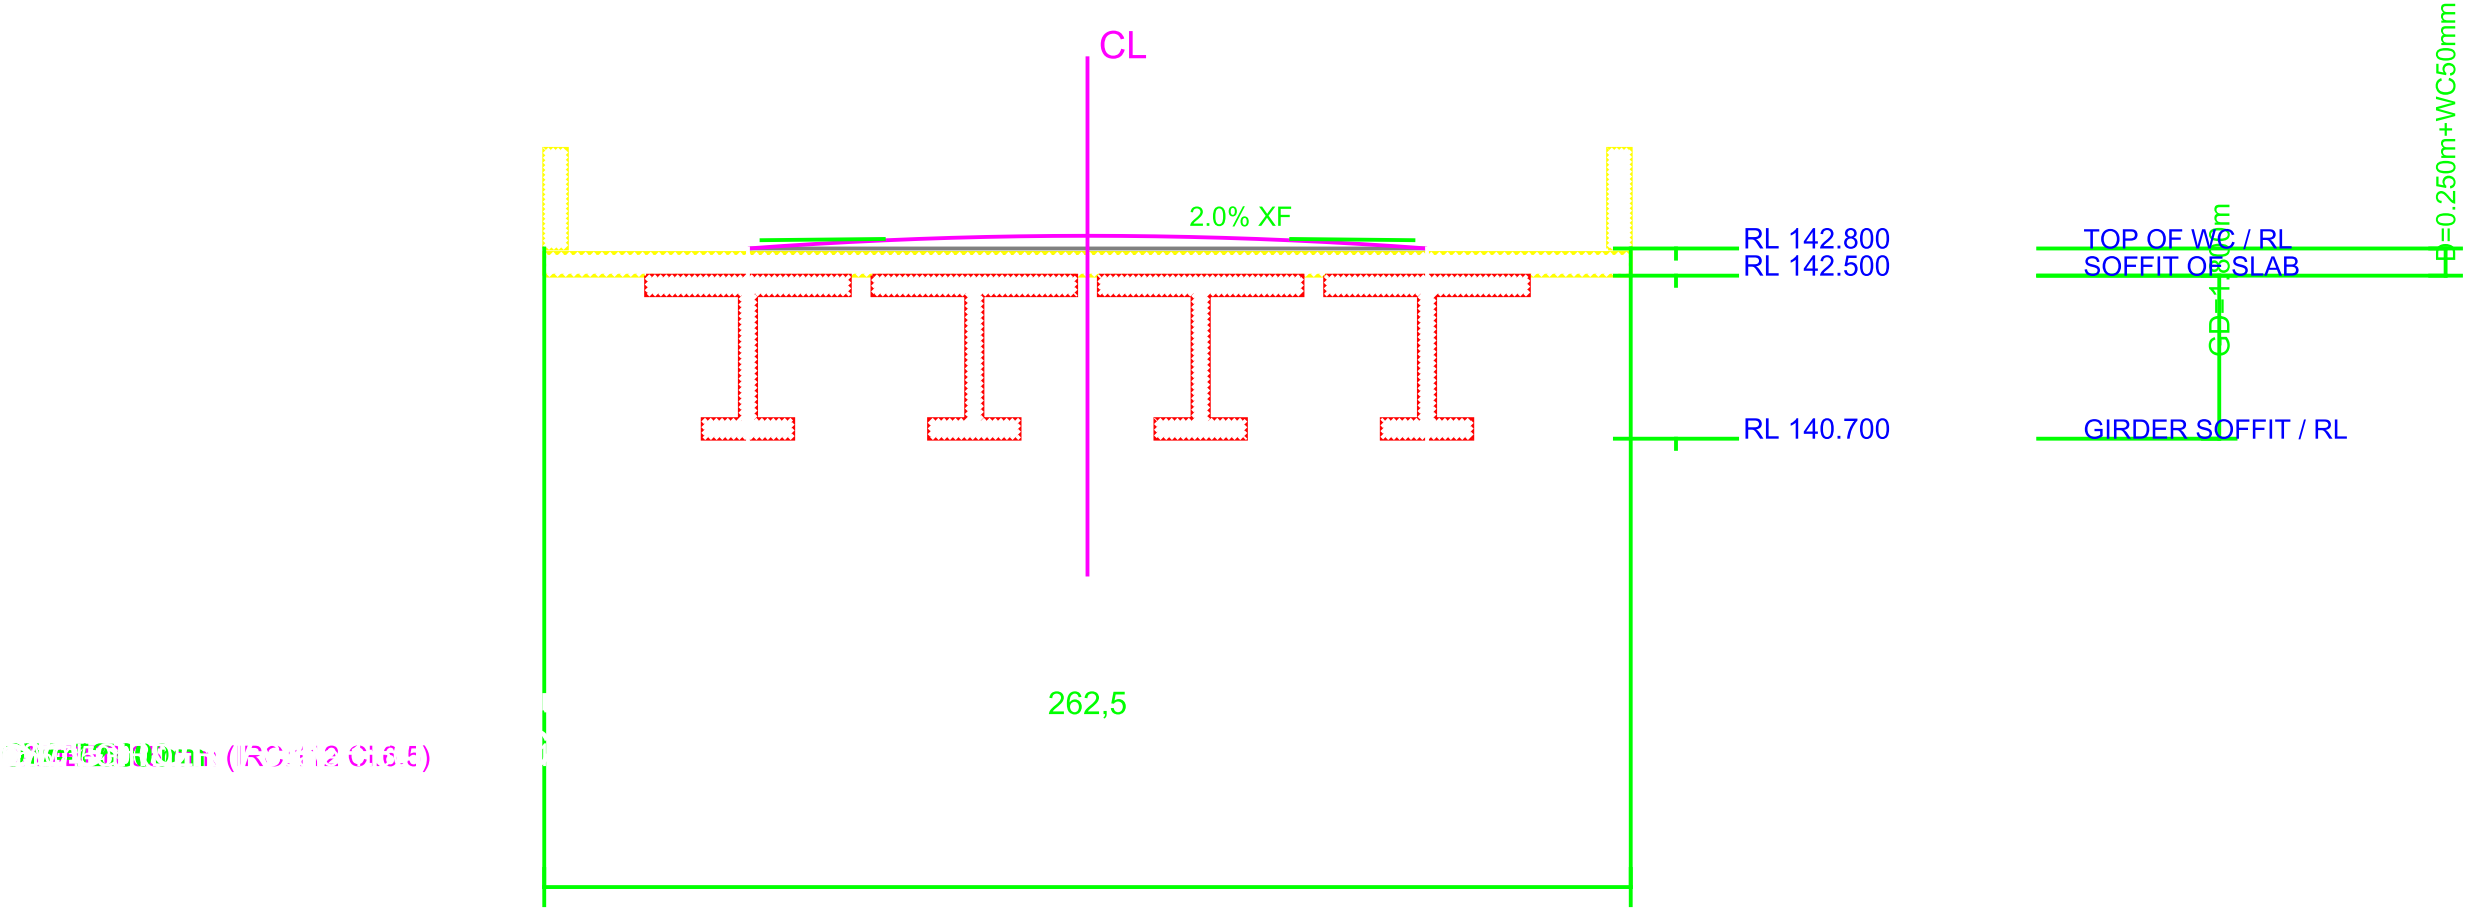
CL
2.0% XF
RL 142.800
RL 142.500
RL 140.700
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GD=1.800m
D=0.250m+WC50mm
262,5
(IRC:112 Cl.6.5)

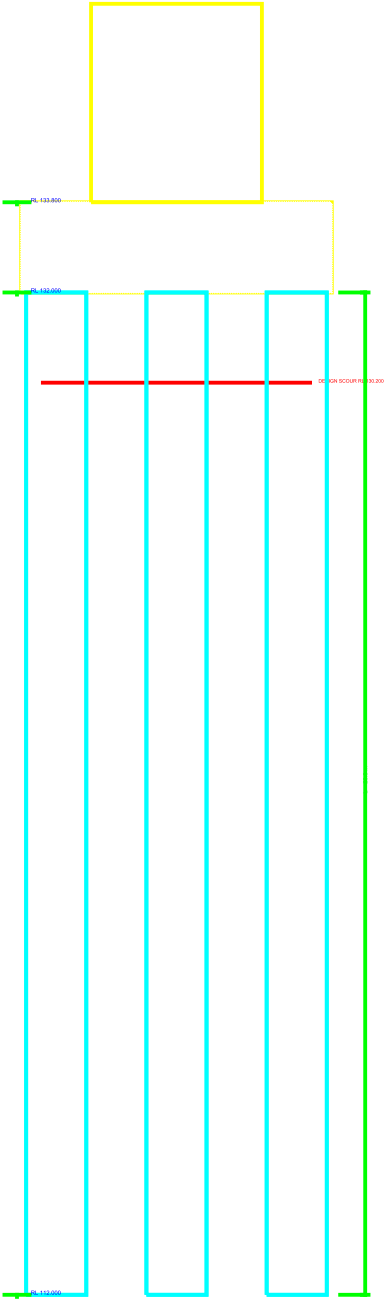
RL 133.800
RL 132.000
DESIGN SCOUR RL 130.200
RL 112.000











QA-ABT-CAP-DEF	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PRC	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	2.80 m	>= 0.35 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.46	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.43	>= 1.40	OK
QA-ABT-BRG	Base pressure	230.22 kPa	<= 480.00 kPa	OK



[illegible]

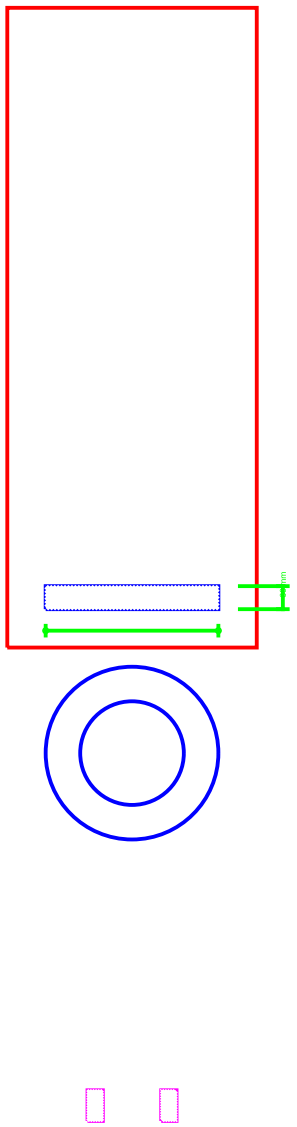
GAP

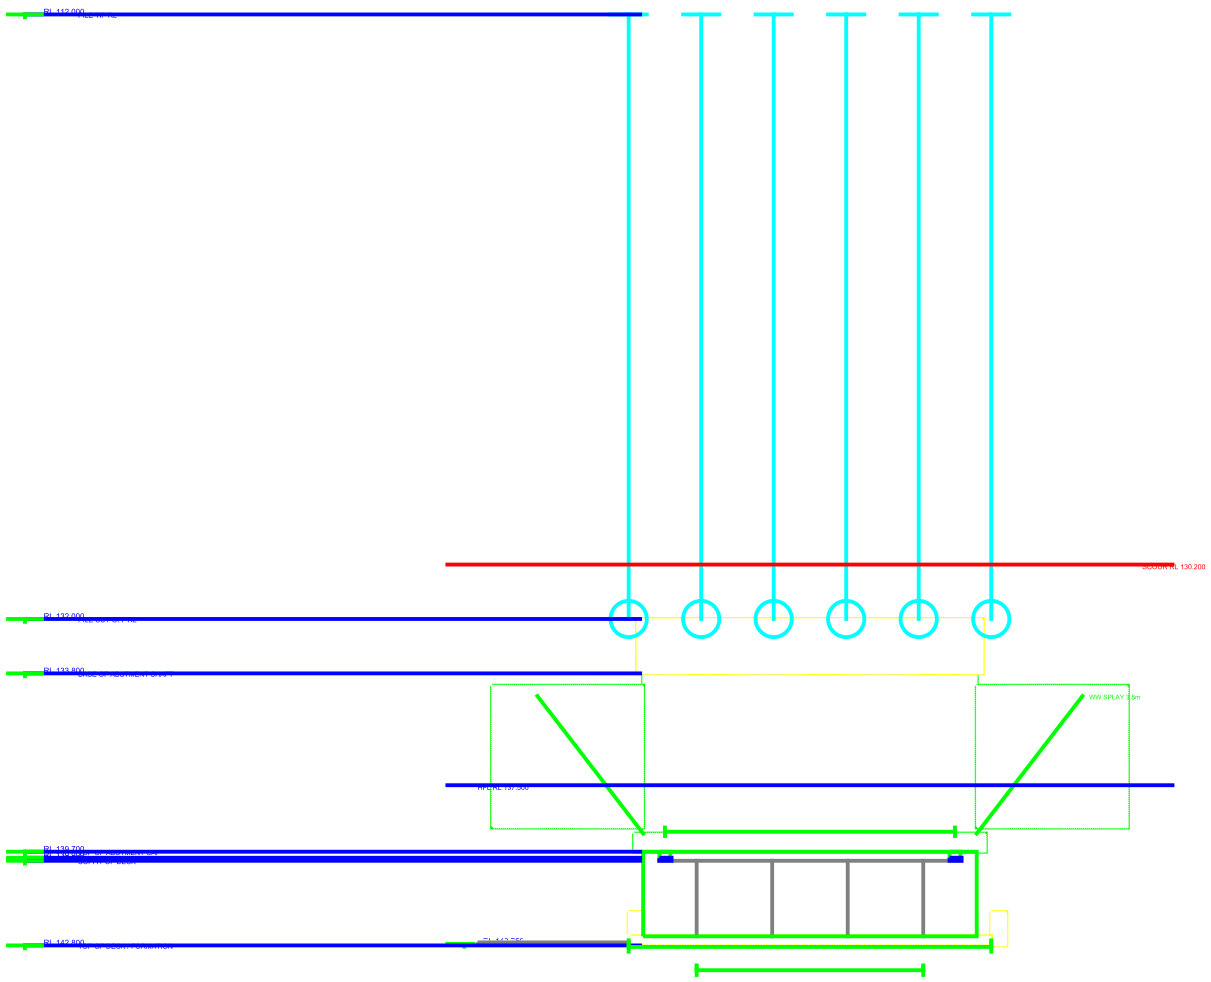

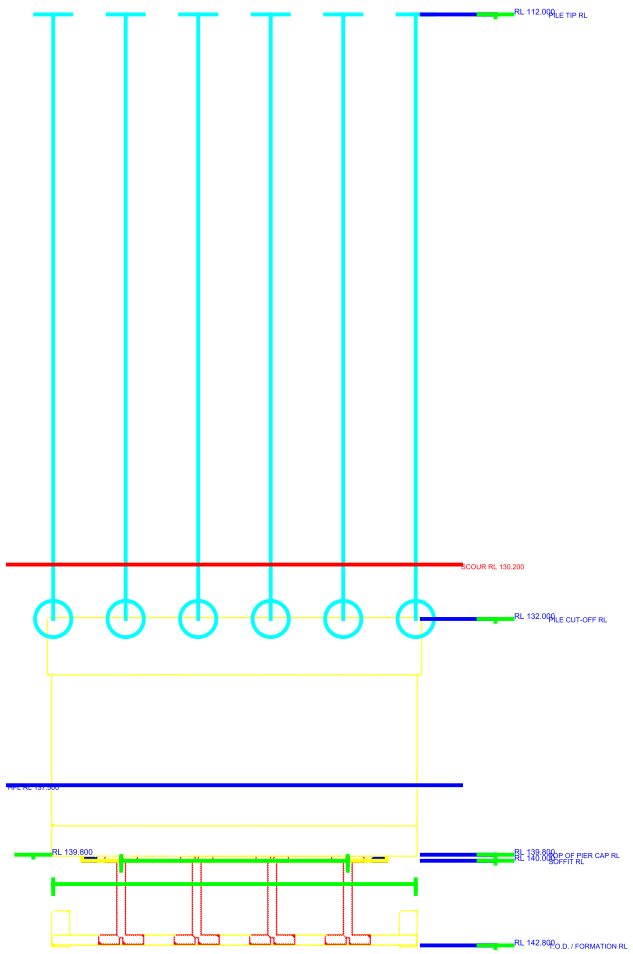

QA-ABT-CAP-DEF	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PR(	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	2.80 m	>= 0.35 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.46	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.43	>= 1.40	OK
QA-ABT-BRG	Base pressure	230.22 kPa	<= 480.00 kPa	OK

[illegible] indicative). [illegible]