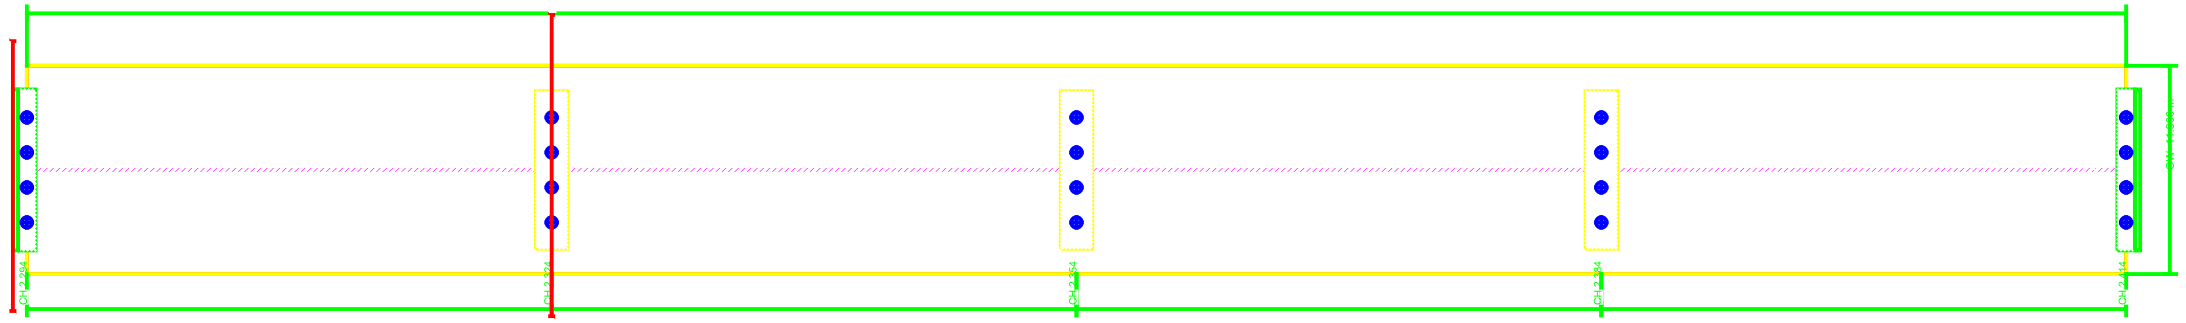

**A-A** **B-B** (Not to Scale – indicative 1:100) [illegible]

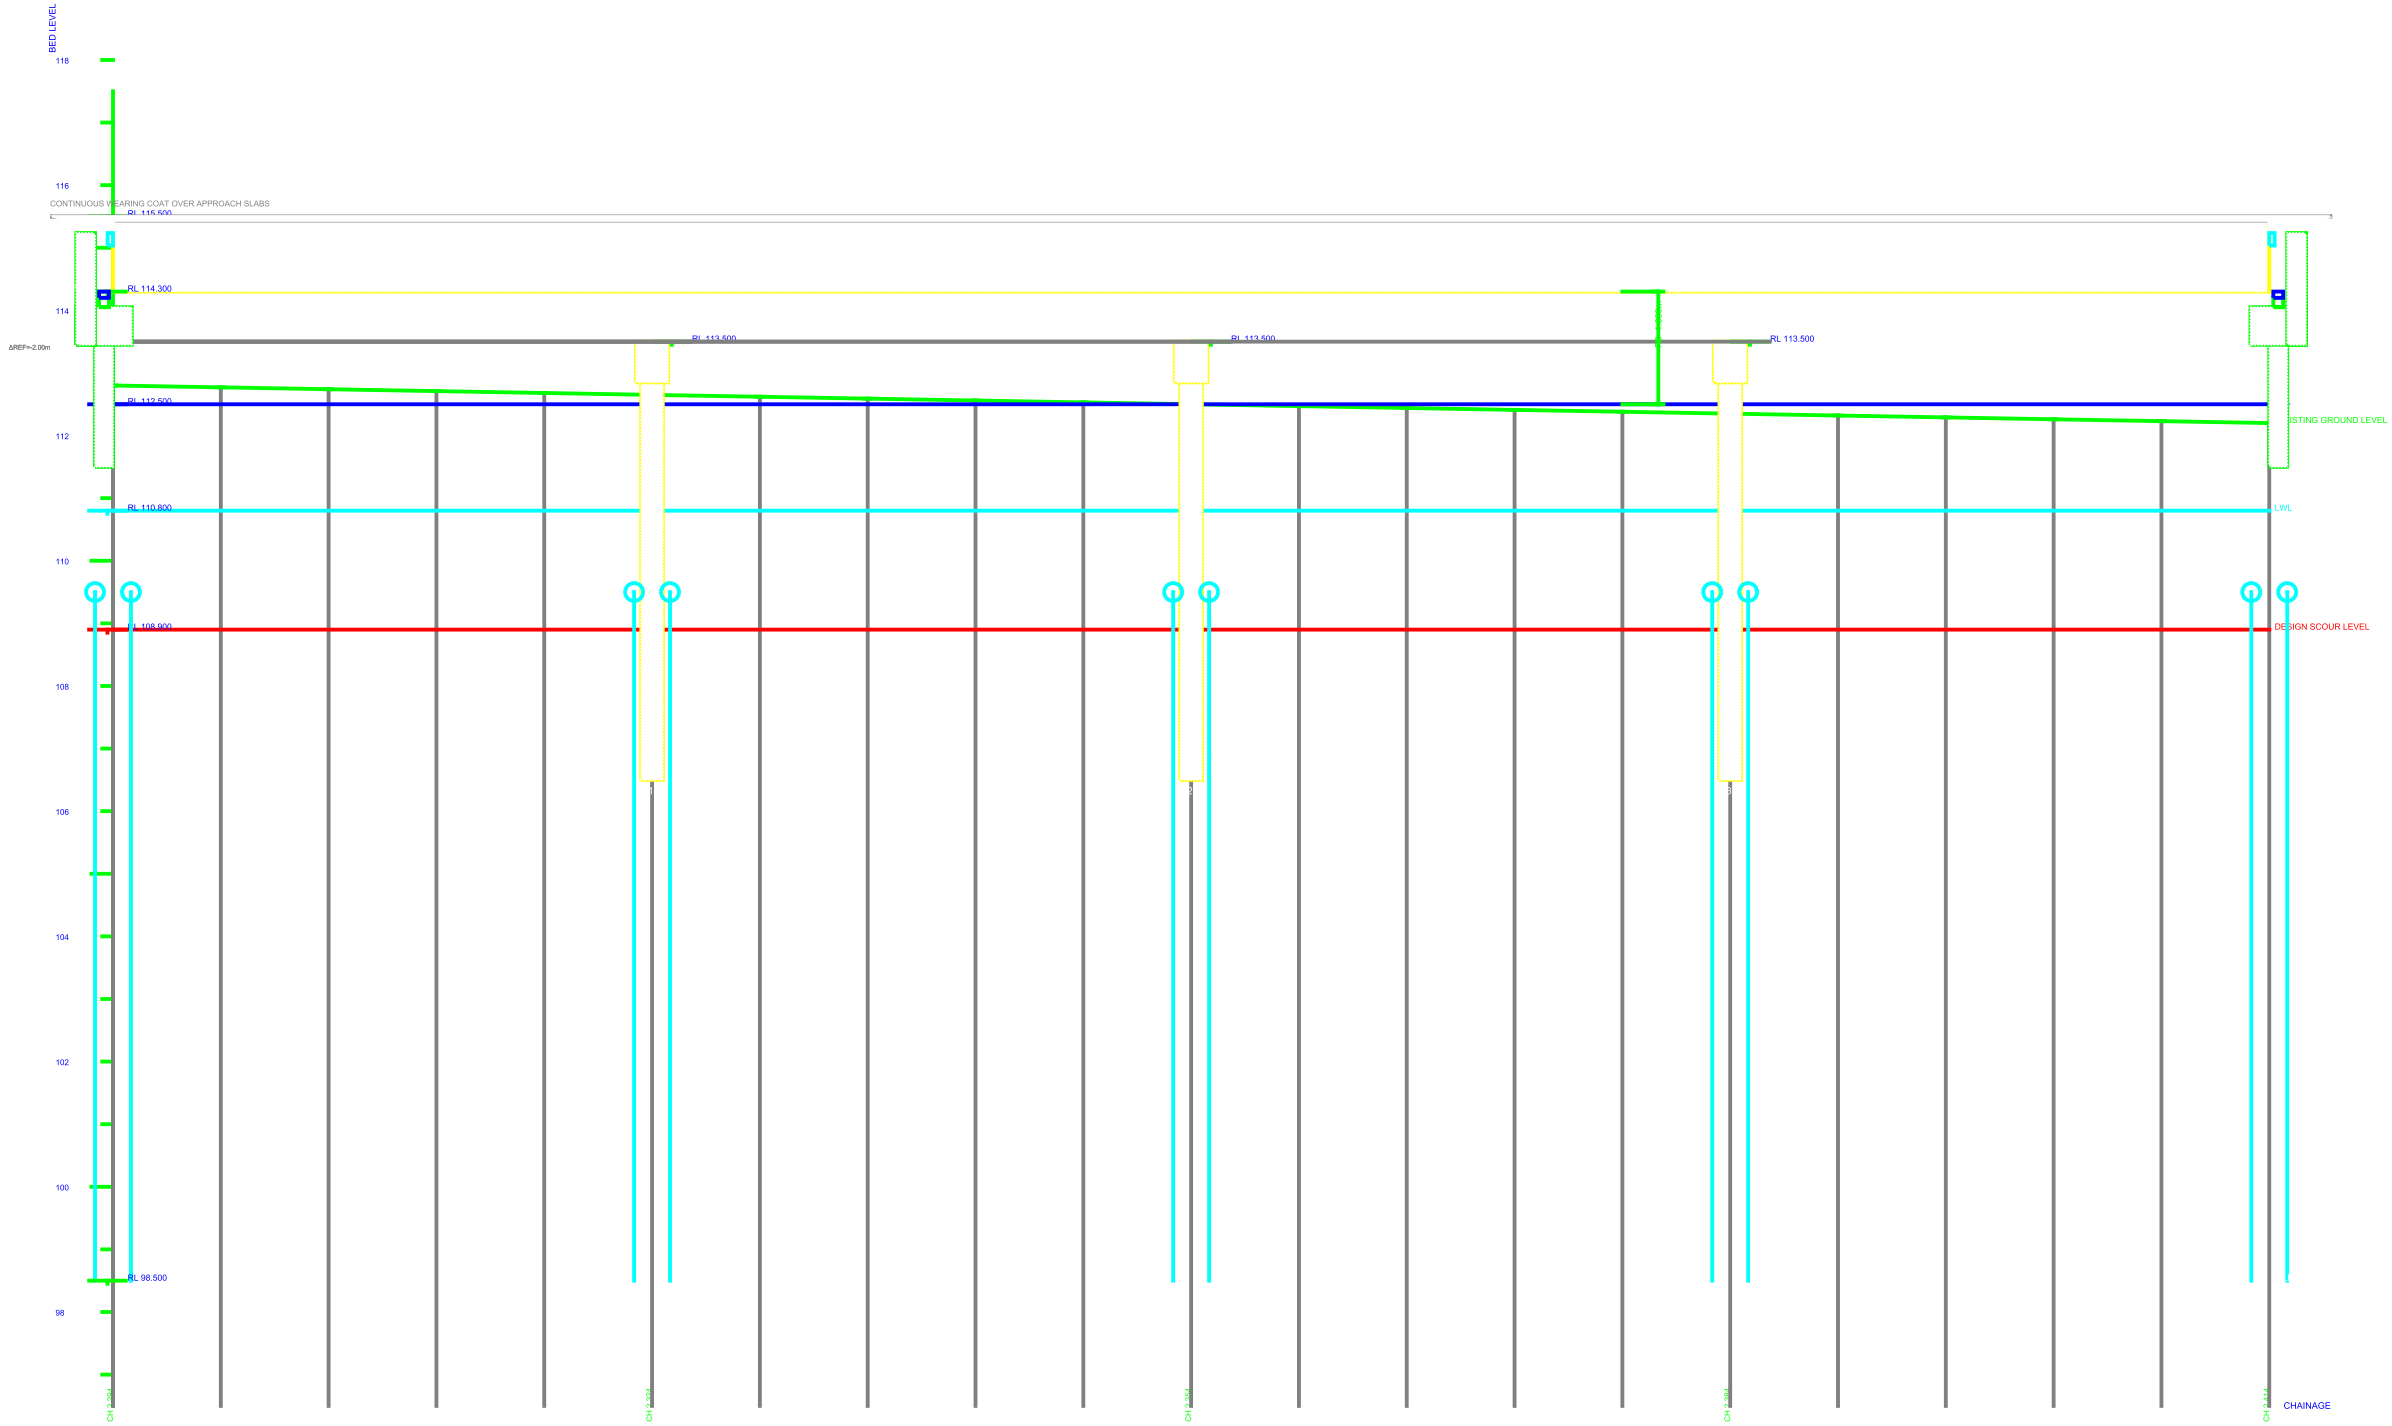

(Not to Scale — indicative)

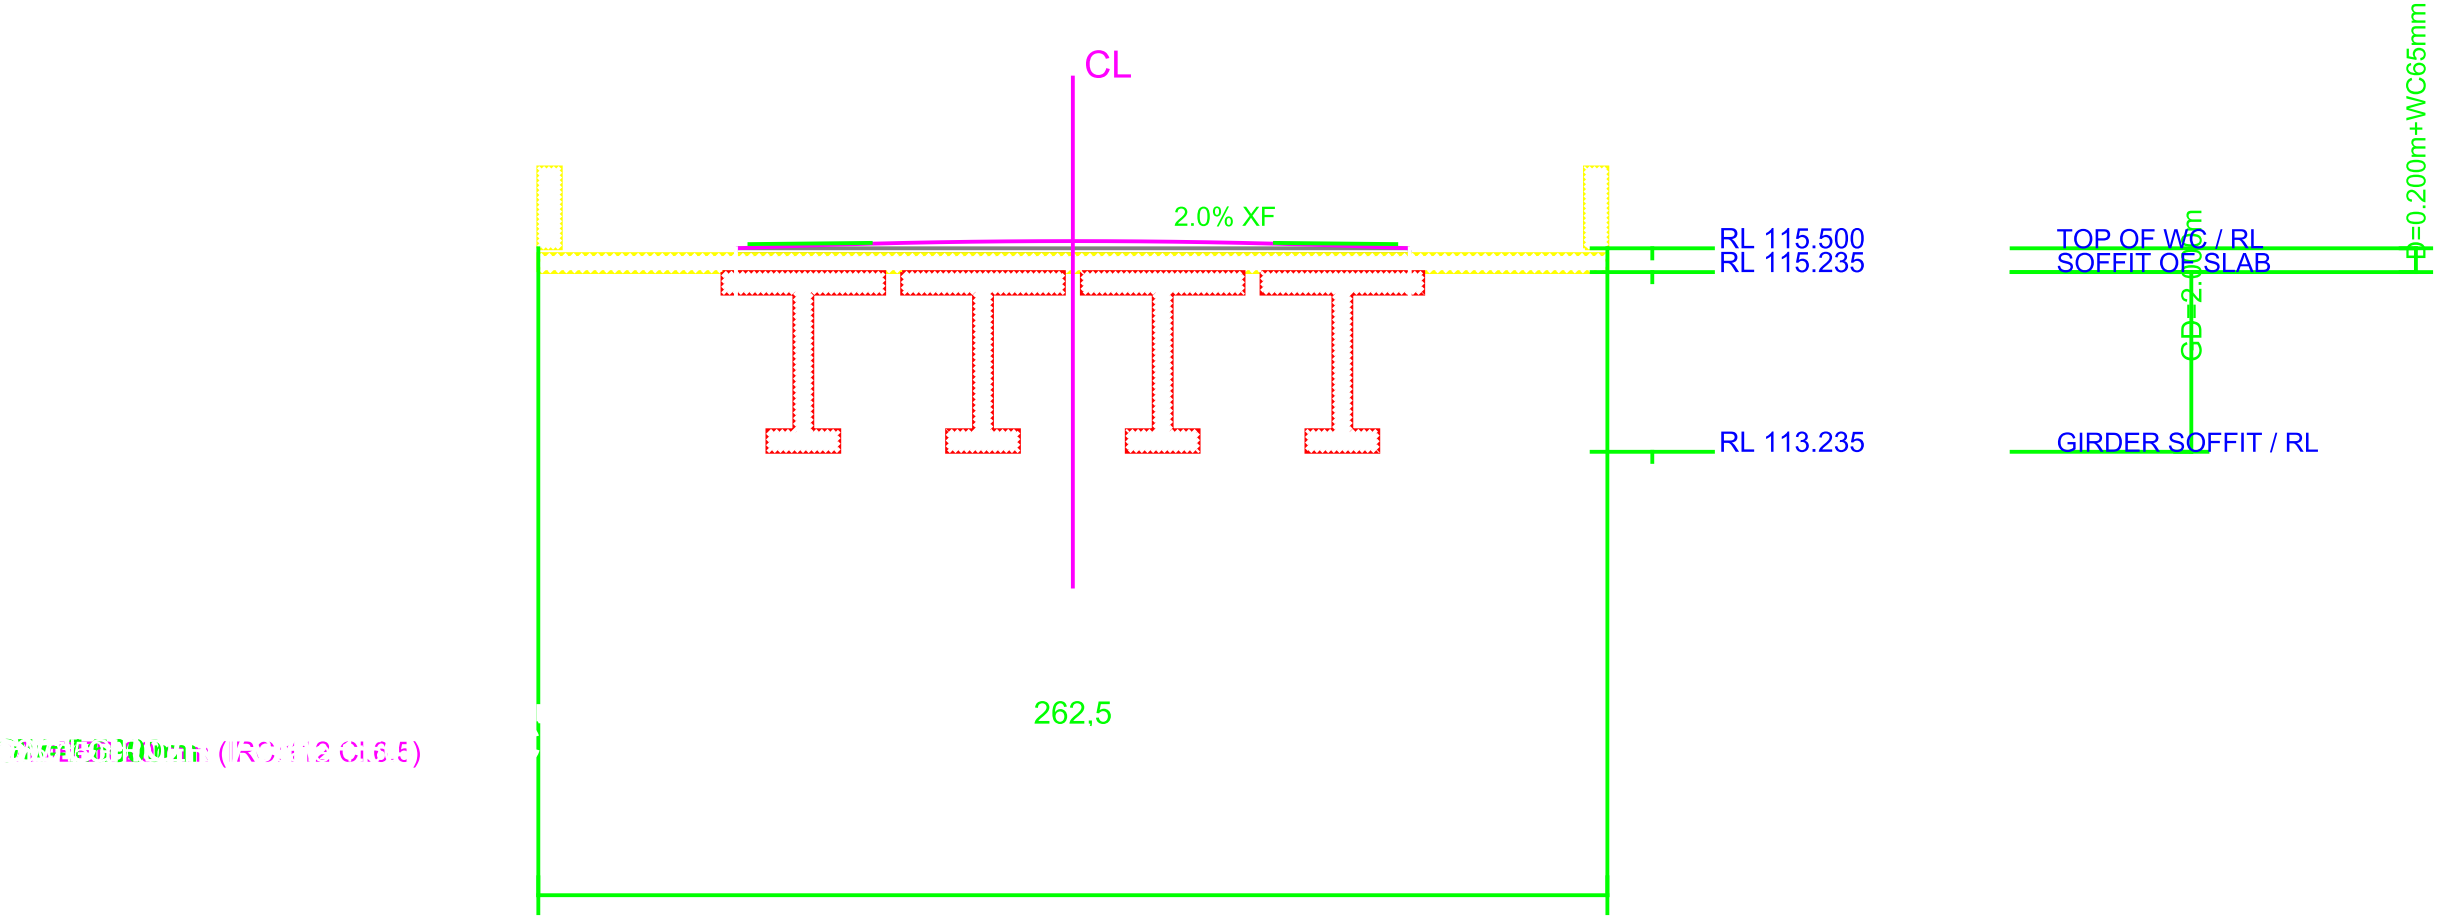
CL
2.0% XF
RL 115.500
RL 115.235
RL 113.235
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GD=2.000m
D=0.200m+WC65mm
262,5
(IRC:112 Cl.6.5)



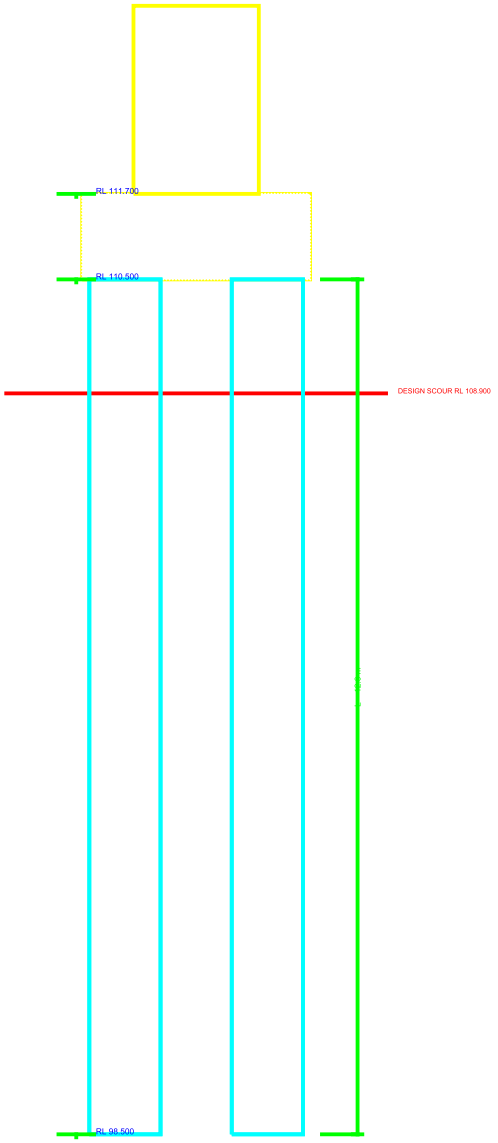
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
RL 98.500









| | | | | |
|---|---|---|---|---|
| QA-ABT-CAP-DEF | Abutment cap depth | 0 mm | >= 450 mm | OK |
| QA-ABT-CAP-PR | Cap projection front/rear | 0/0 mm | 100-250 / 250-600 mm | OK |
| QA-DW-THK | Dirt wall thickness | 0 mm | >= 250 mm | OK |
| QA-DW-TOP | Dirt wall to slab soffit | 1.19 m | >= 0.30 m | OK |
| QA-DW-WEEP | Weep holes provided | 4 | 1 per 3 m | OK |
| QA-ABT-OT | Overturning FOS | 1.36 | >= 1.40 | FAIL |
| QA-ABT-SL | Sliding FOS | 1.39 | >= 1.40 | FAIL |
| QA-ABT-BRG | Base pressure | 159.91 kPa | <= 350.00 kPa | OK |



[illegible]

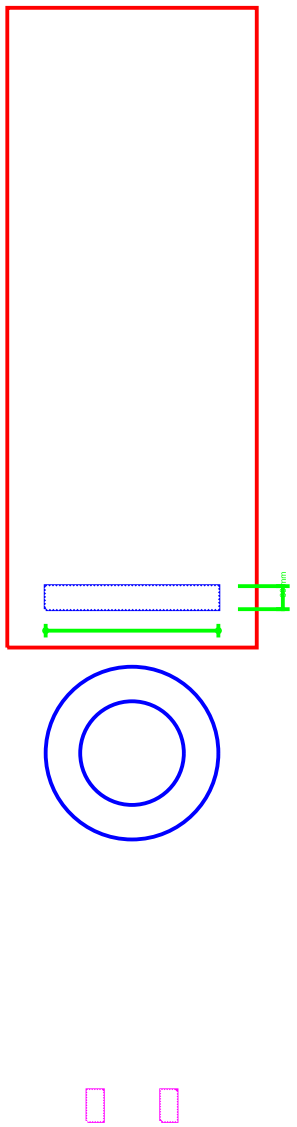

GAP

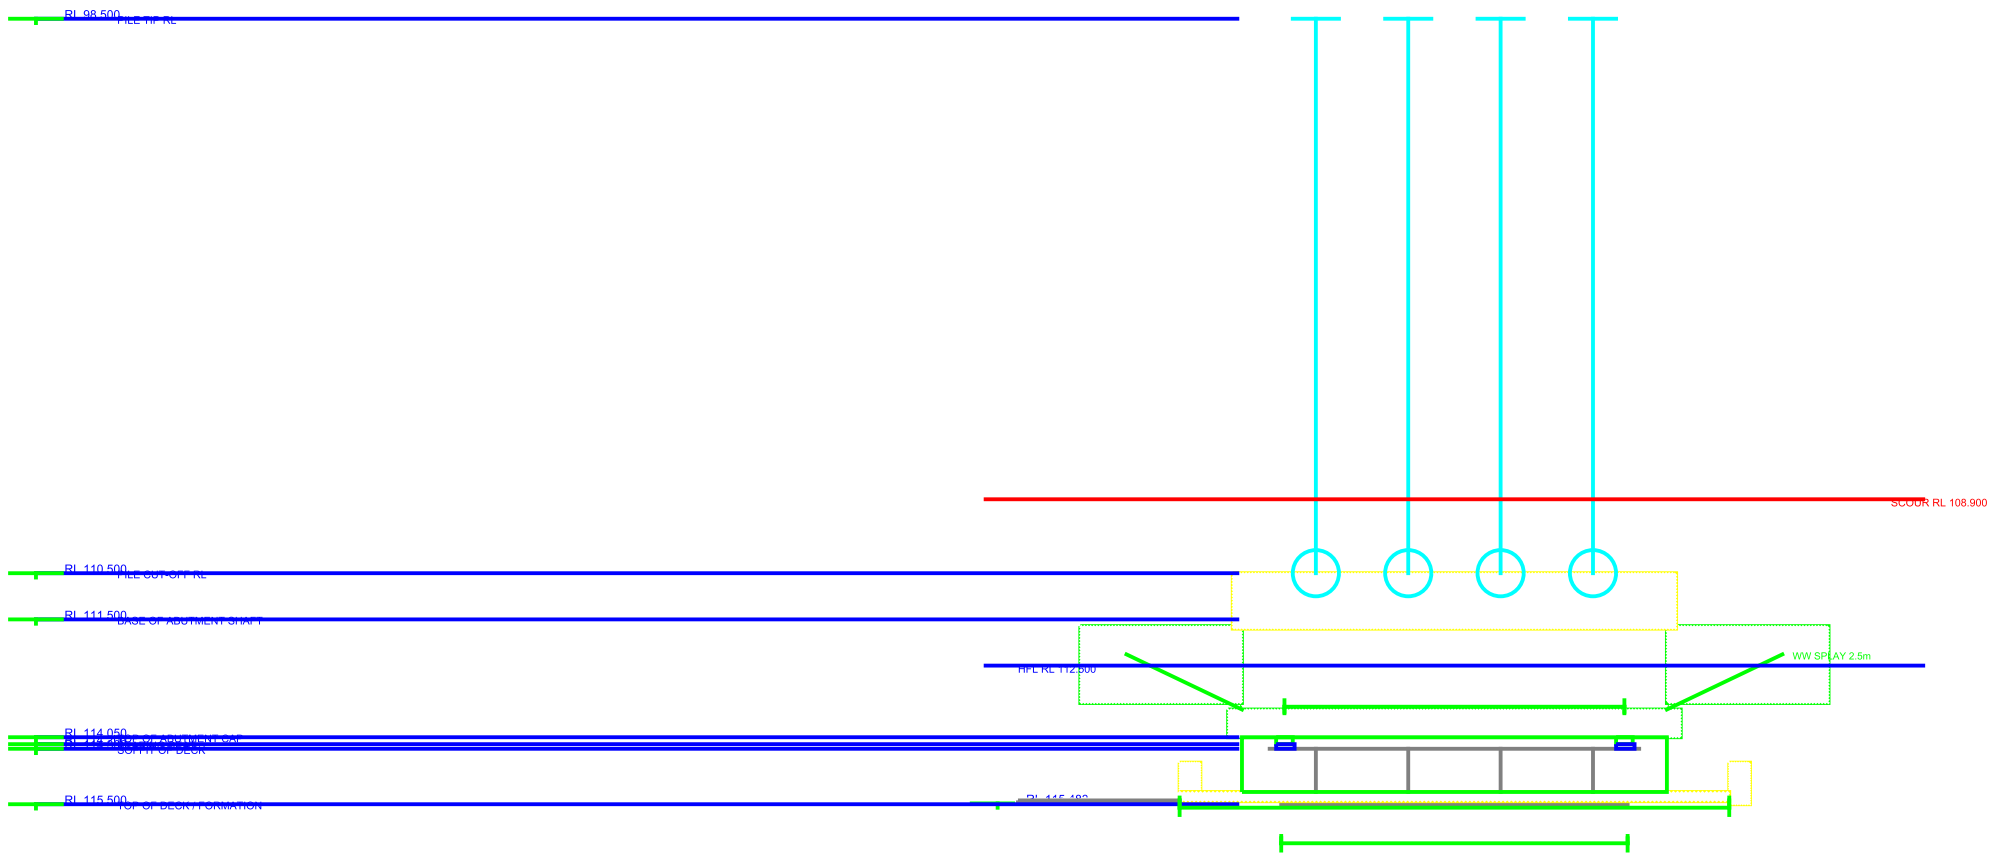
RL 98.500 PILE TIP RL
SCOUR RL 108.900
RL 110.500 PILE CUT-OFF RL
RL 111.500 BASE OF ABUTMENT SHAFT
HFL RL 112.500
WW SPLAY 2.5m
RL 114.050 TOP OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.500 TOP OF DECK / FORMATION
RL 115.482

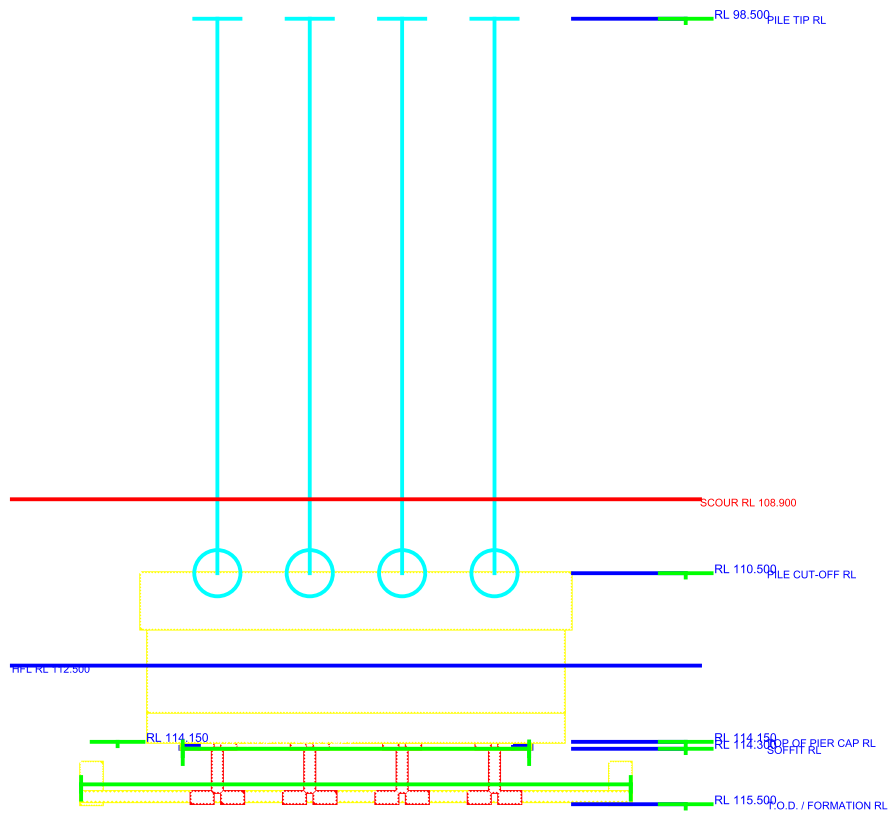
RL 98.500 PILE TIP RL
SCOUR RL 108.900
RL 110.500 PILE CUT-OFF RL
HFL RL 112.500
RL 114.150
RL 114.150 TOP OF PIER CAP RL
RL 114.300 SOFFIT RL
RL 115.500 T.O.D. / FORMATION RL

| | | | | |
|---|---|---|---|---|
| QA-ABT-CA | Abutment cap depth | 0 mm | >= 450 mm | OK |
| QA-ABT-CA | Cap projection front/rear | 0/0 mm | 100-250 / 250-600 mm | OK |
| QA-DW-THI | Dirt wall thickness | 0 mm | >= 250 mm | OK |
| QA-DW-TOI | Dirt wall to slab soffit | 1.19 m | >= 0.30 m | OK |
| QA-DW-WE | Weep holes provided | 4 | 1 per 3 m | OK |
| QA-ABT-OT | Overturning FOS | 1.36 | >= 1.40 | FAIL |
| QA-ABT-SL | Sliding FOS | 1.39 | >= 1.40 | FAIL |
| QA-ABT-BR | Base pressure | 159.91 kPa | <= 350.00 kPa | OK |

(Not to Scale - indicative)