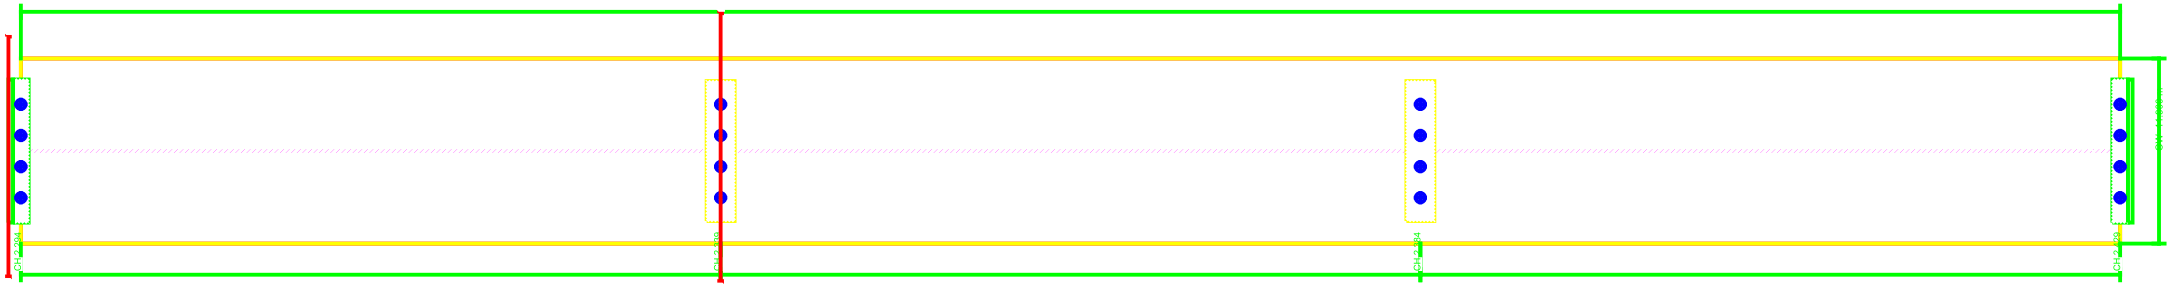
CH 2.294
CH 2.339
CH 2.384
CH 2.429

B-B (Not to Scale -- indicative 1:100)

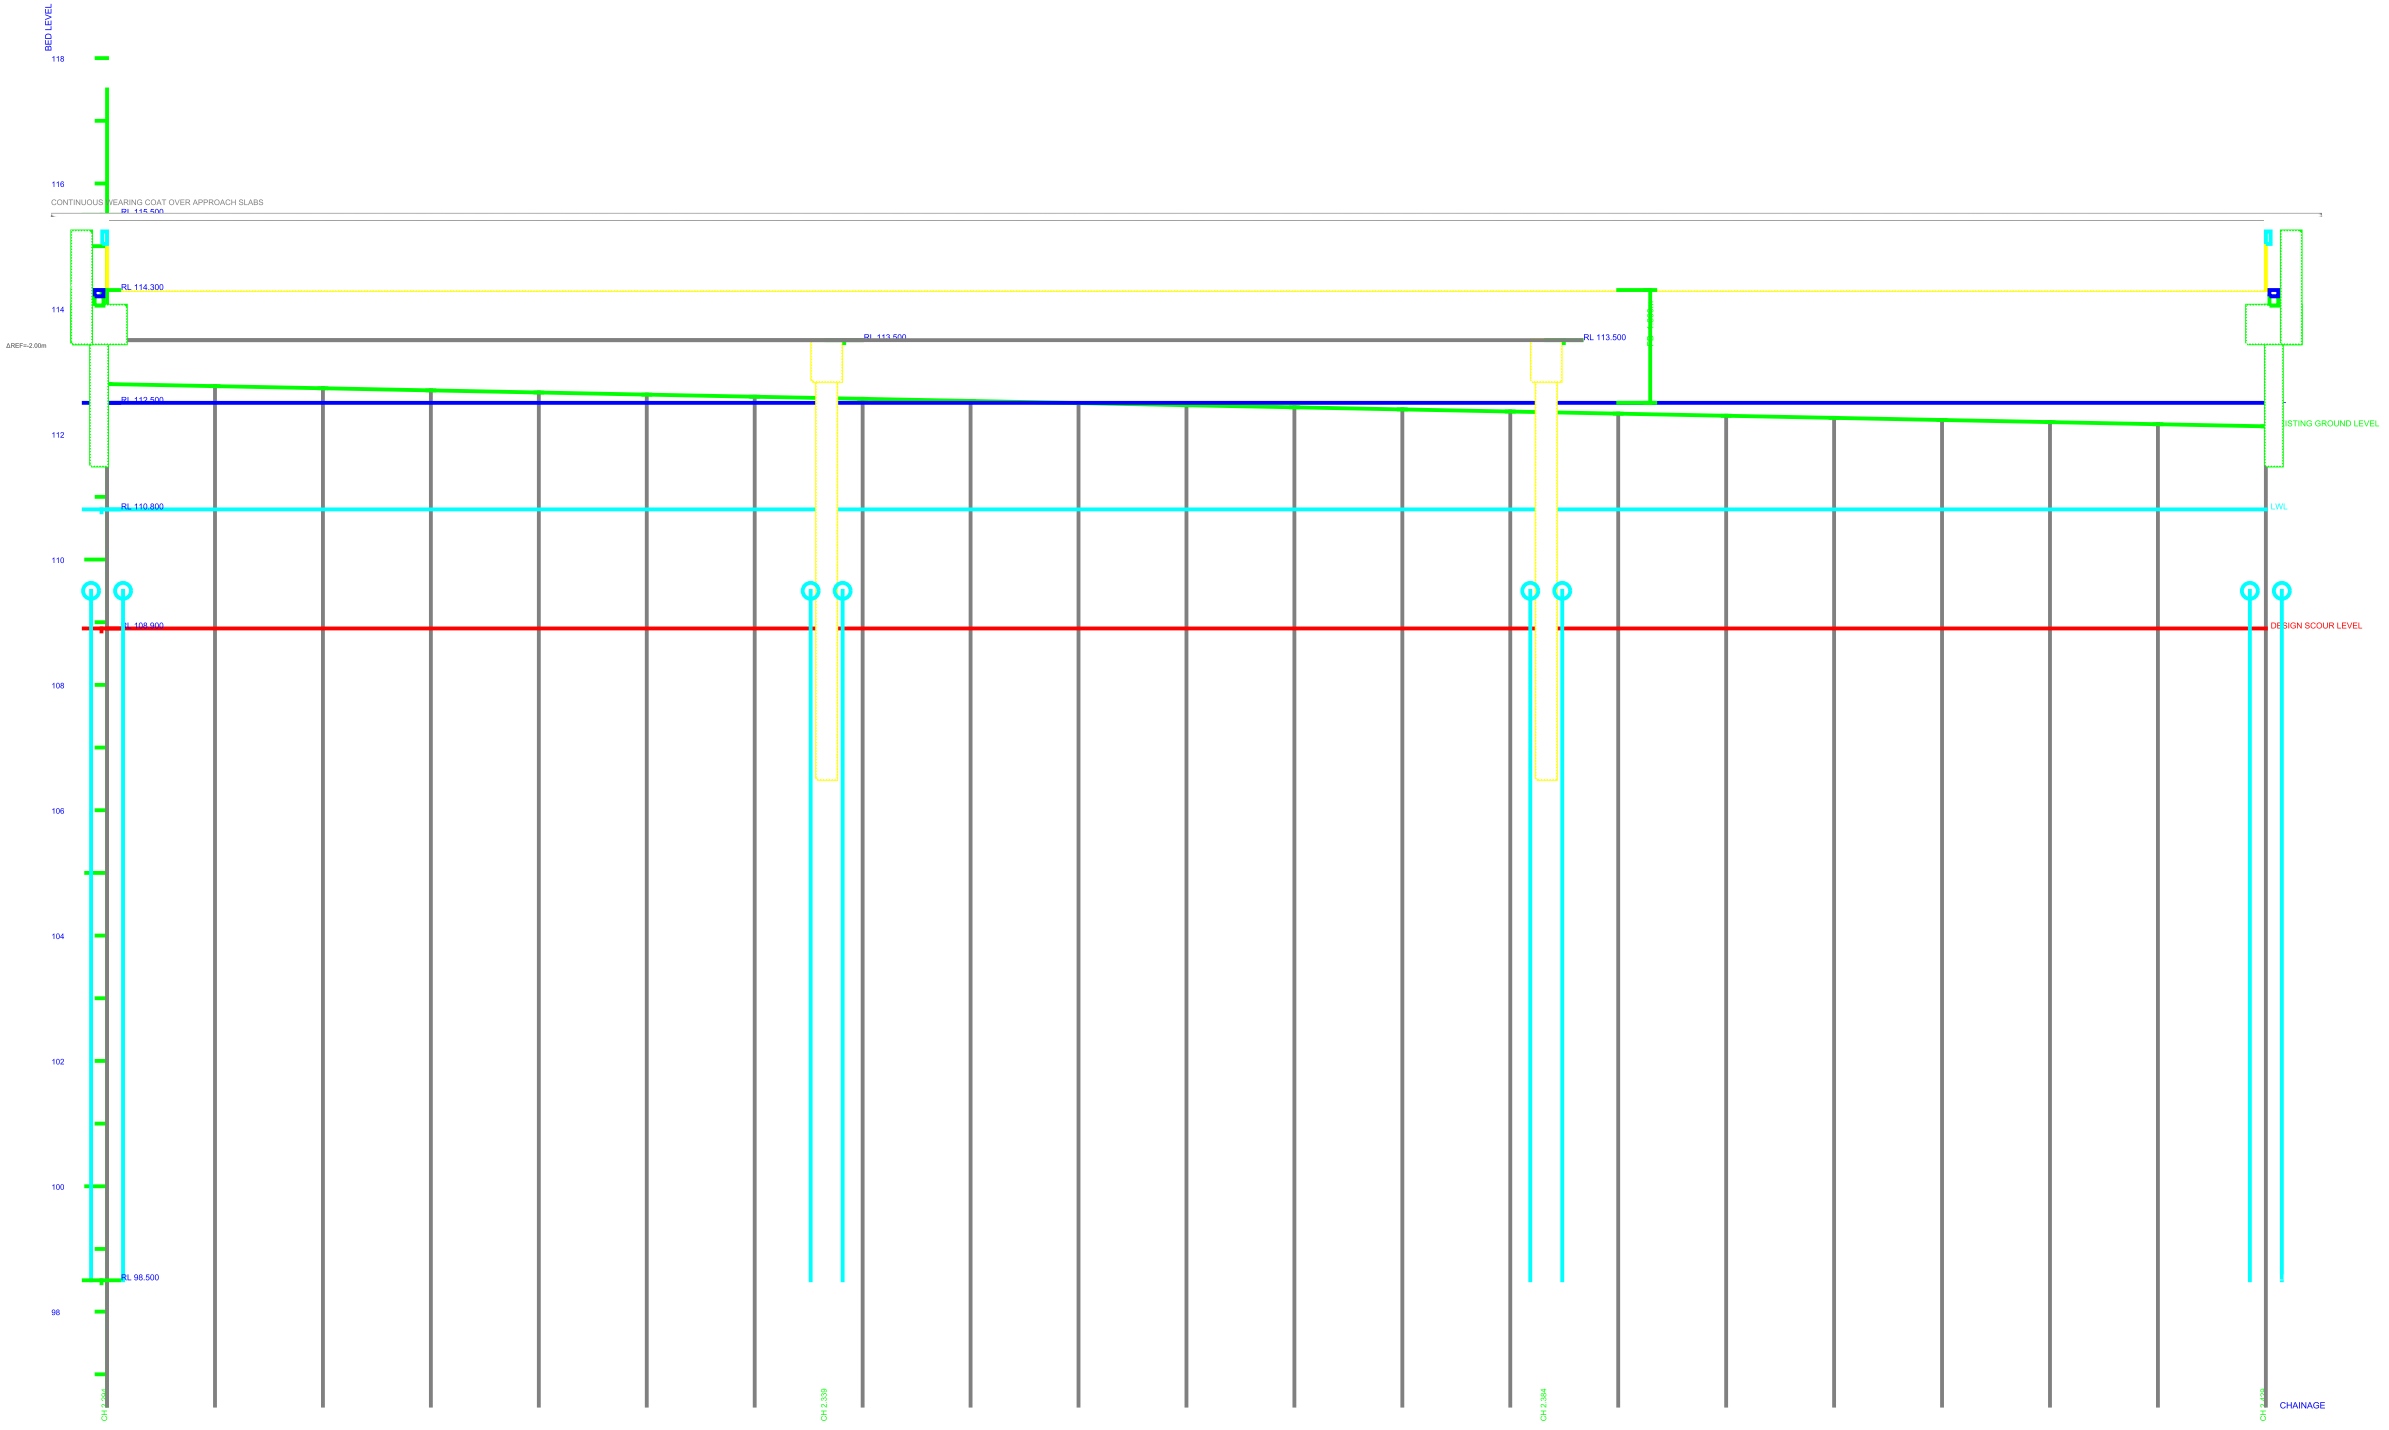
BED LEVEL
118
116
CONTINUOUS WEARING COAT OVER APPROACH SLABS
RL 115.500
RL 114.300
114
ΔREF=-2.00m
RL 113.500
RL 113.500
RL 112.500
112
EXISTING GROUND LEVEL
RL 110.800
LWL
110
RL 108.900
DESIGN SCOUR LEVEL
108
106
104
102
100
RL 98.500
98
CH 2.294
CH 2.339
CH 2.384
CH 2.429
CHAINAGE

(Not to Scale — indicative)

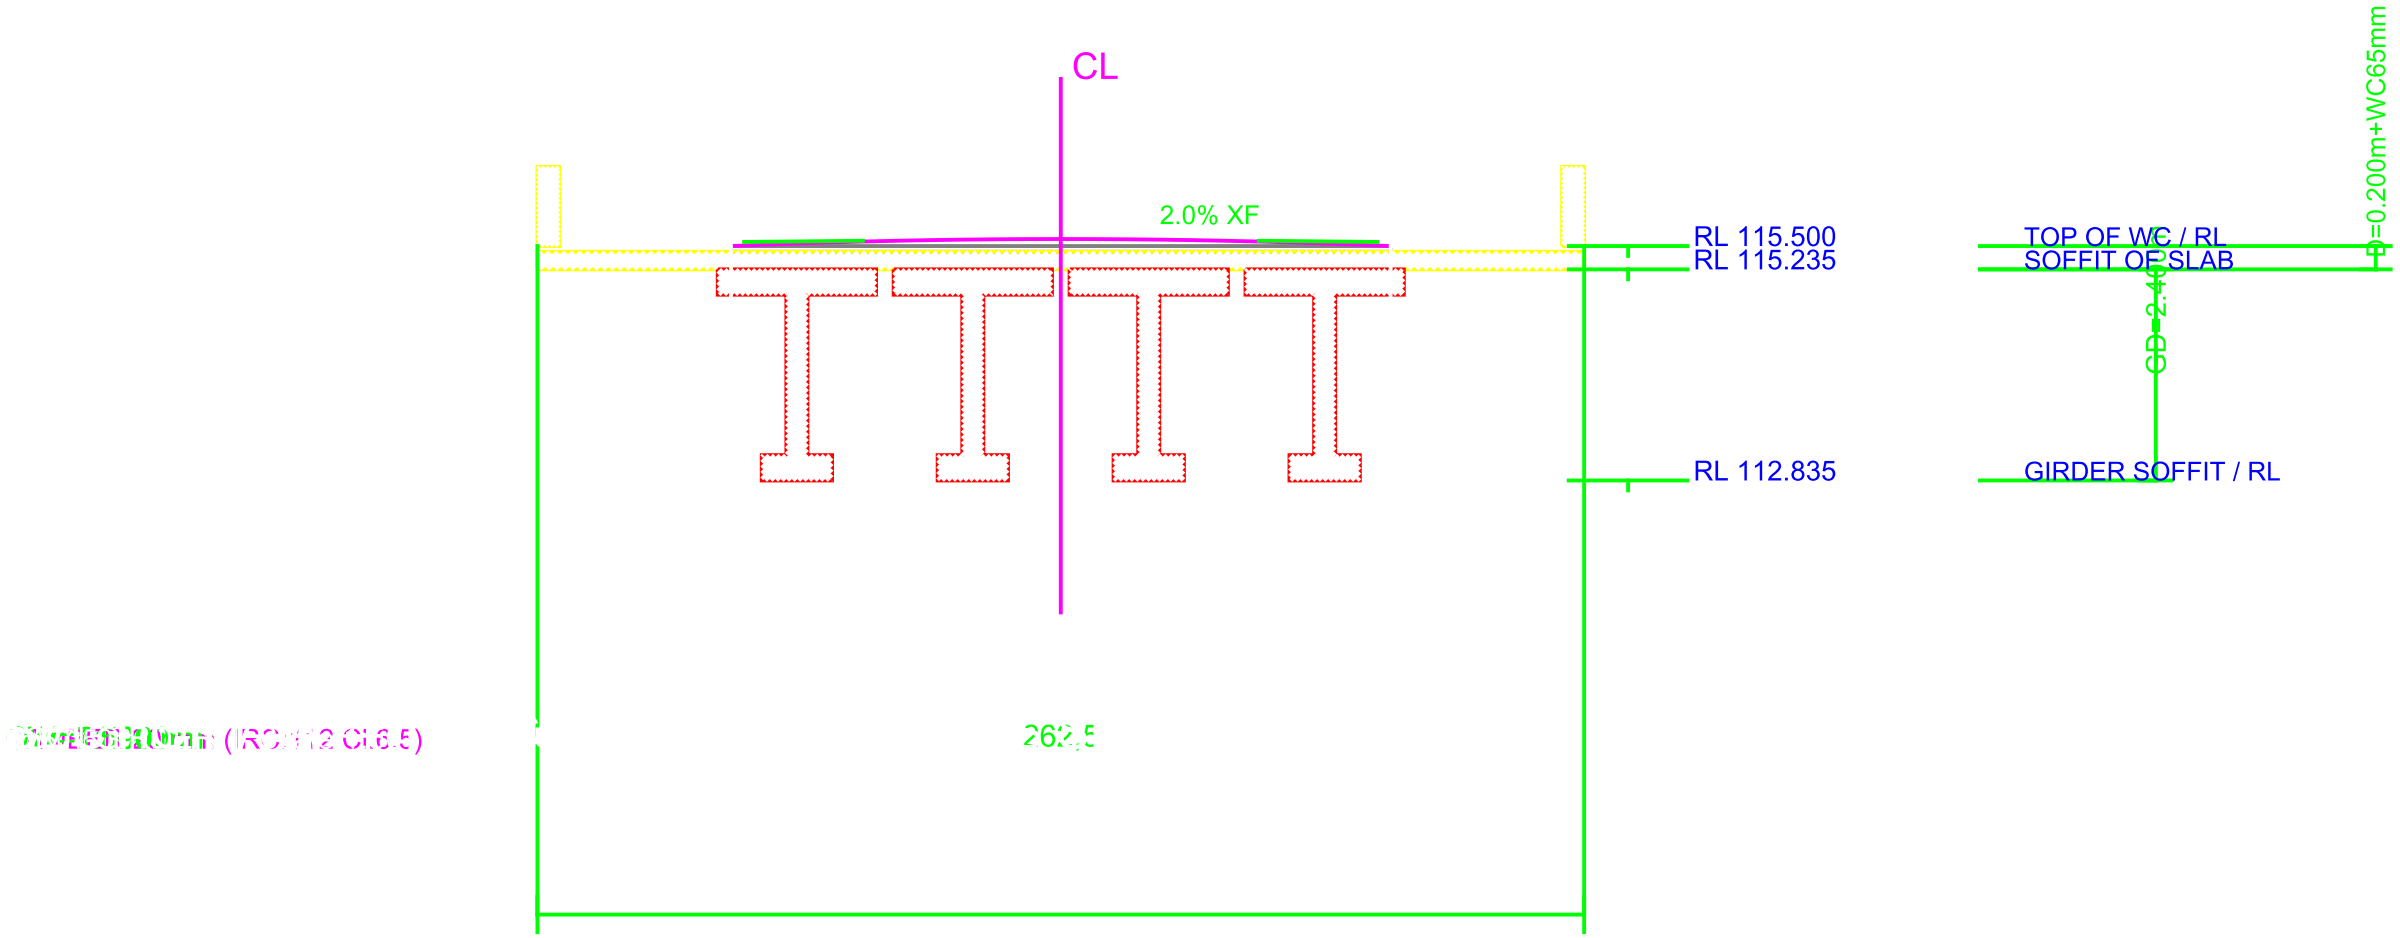
CL
2.0% XF
RL 115.500
RL 115.235
RL 112.835
TOP OF WC / RL
SOFFIT OF SLAB
GIRDER SOFFIT / RL
GD=2.40
D=0.200m+WC65mm
(IRC 112 Cl.6.5)
262,5



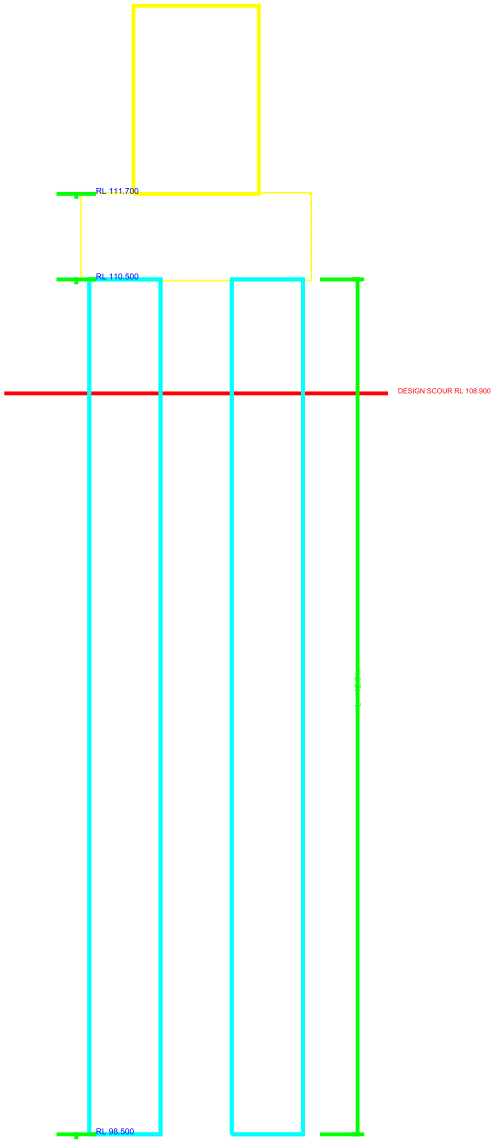
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
RL 98.500









QA-ABT-CAP-DEF	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PRC	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK





GAP

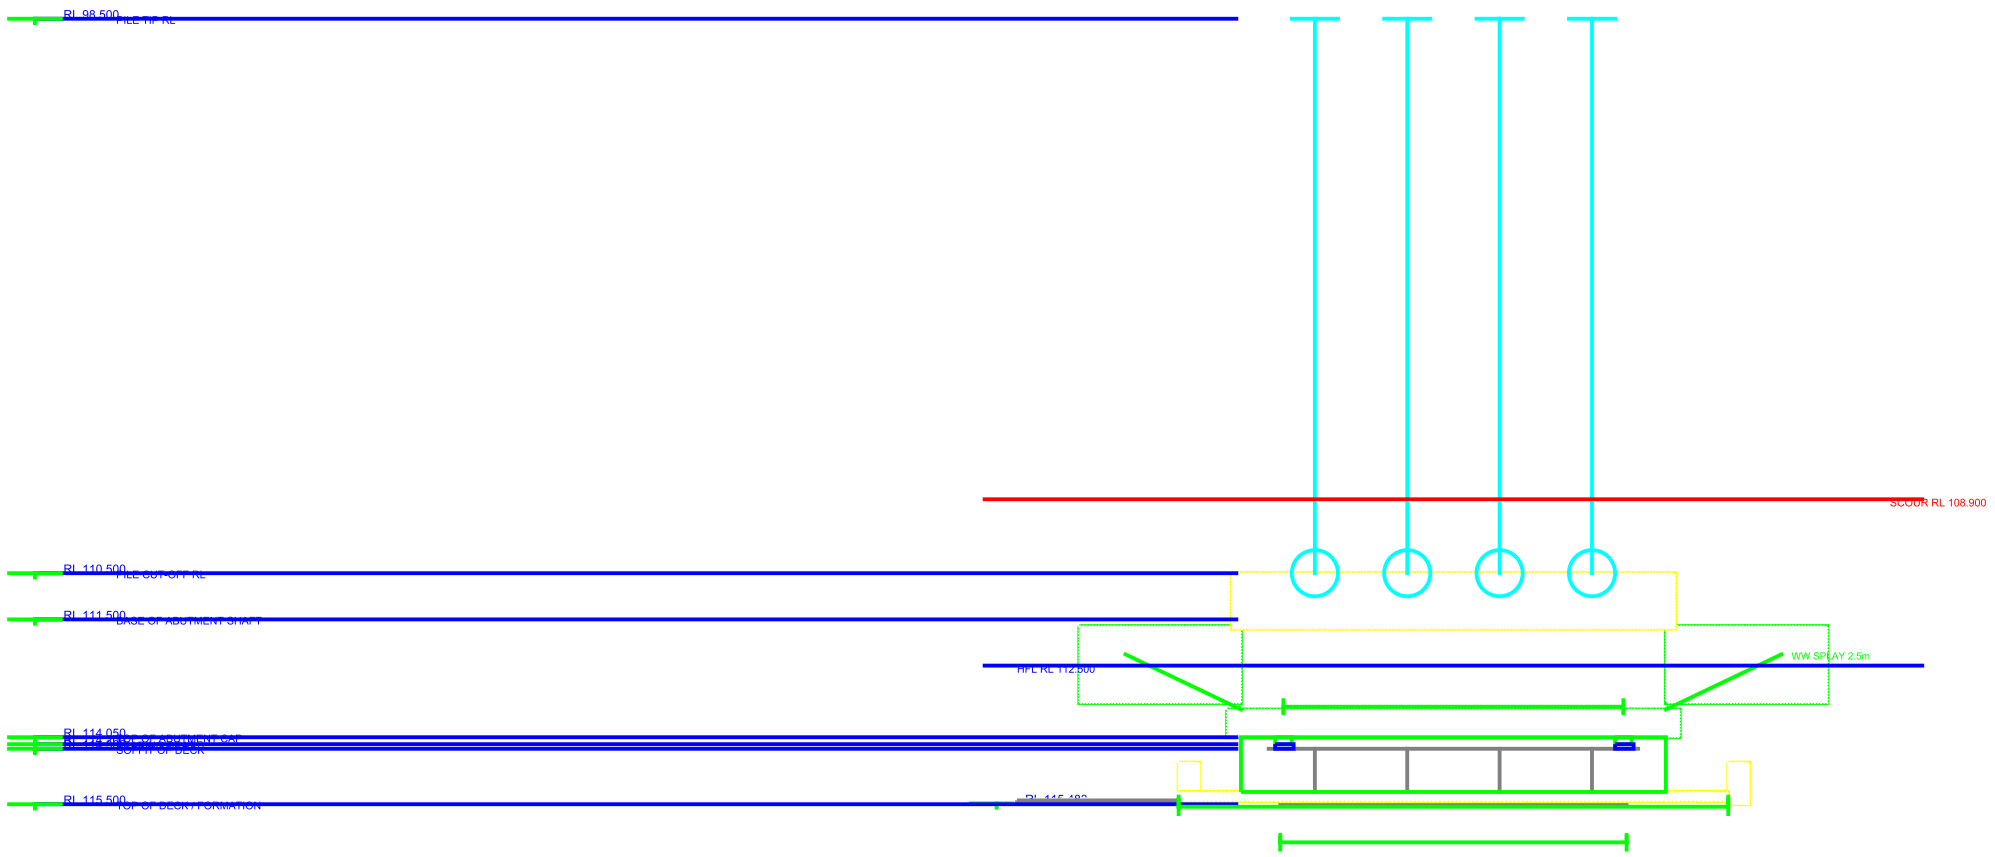
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
HFL RL 112.500
WW SPLAY 2.5m
RL 114.050
TOP OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.500
TOP OF DECK / FORMATION
RL 115.482

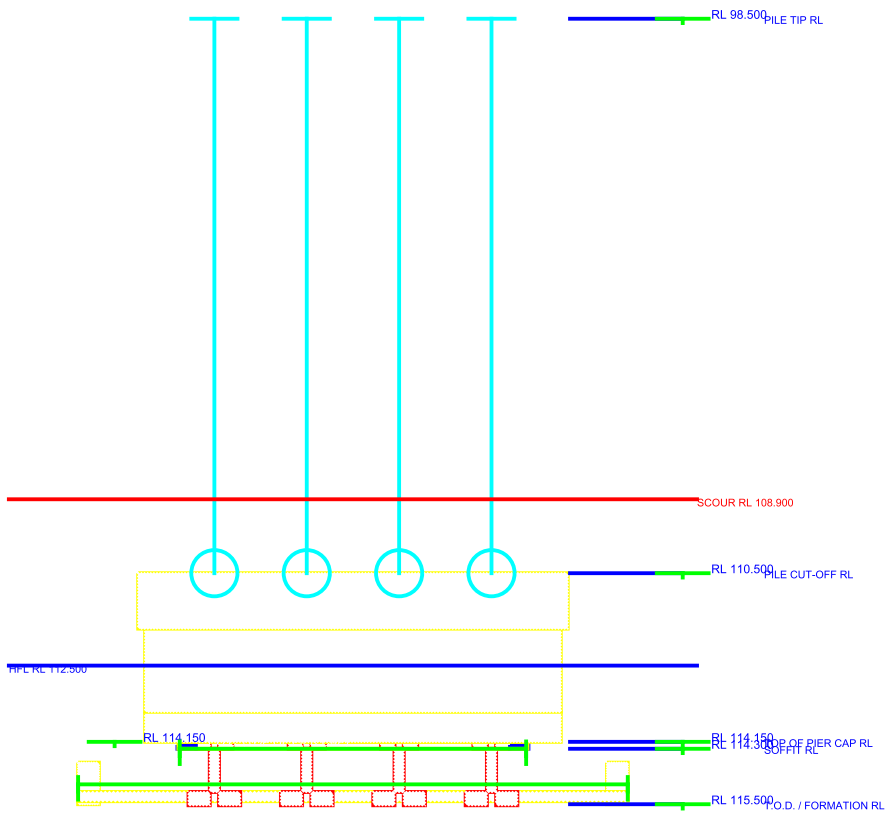
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
HFL RL 112.500
RL 114.150
RL 114.150
TOP OF PIER CAP RL
RL 114.300
SOFFIT RL
RL 115.500
T.O.D. / FORMATION RL

QA-ABT-CA	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CA	Cap projection front/rear	0/0 mm	100-250 / 250-600 m	OK
QA-DW-THI	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOI	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BR	Base pressure	159.91 kPa	<= 350.00 kPa	OK

(Not to Scale – indicative)