





A-A
B-B
(Not to Scale — indicative 1:100)
Total L = 24.000 m
KERB=0.25 m
CW=7.600 m
OW=10.900 m
A1 W=2.500 m
A2 W=2.500 m
KERB=0.25 m
24.000 m
CH 0.000
CH 196.000



CONTINUOUS WEARING COAT OVER APPROACH SLABS
(Not to Scale — indicative)
RL 258.500
RL 255.700
RL 252.800
RL 248.500
RL 246.500
RL 245.200
DECK
DECK
FB=2.200m
HFL
LWL
HFL
LWL
DESIGN SCOUR LEVEL
PILE=0.000m
SCOUR=7.600m
ABUT= 0.250m
BED LEVEL
CHAINAGE
CH 164.988
CH 165.012
260
258
256
254
252
250
248
246
0
2
4
6
8
10
12
14
16
18
20
22
24



CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 15 mm (IRC:112 Cl.6.5)
2.0% XF
RL=258.500 TOP OF WC / RL
RL=258.215 SOFFIT OF SLAB
RL=257.415 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=10.900 m


DESIGN SCOUR RL 246.256

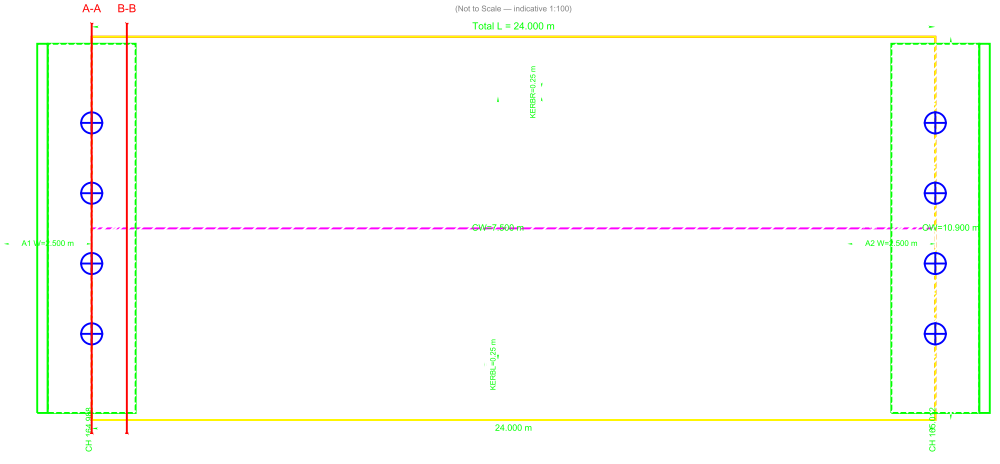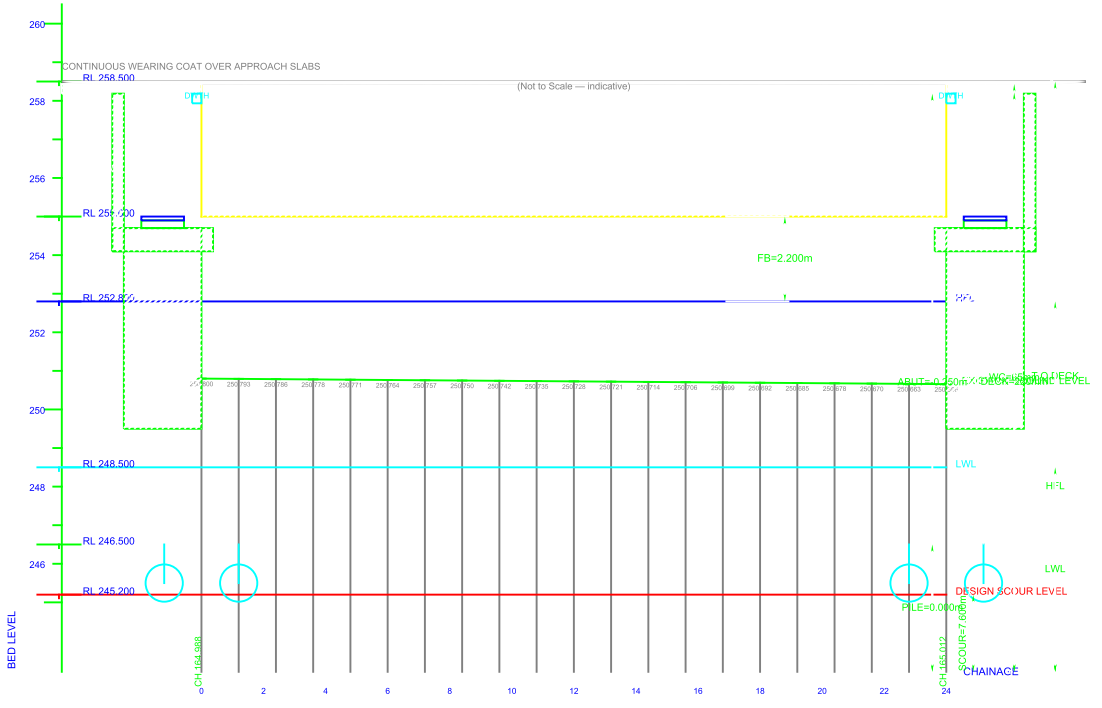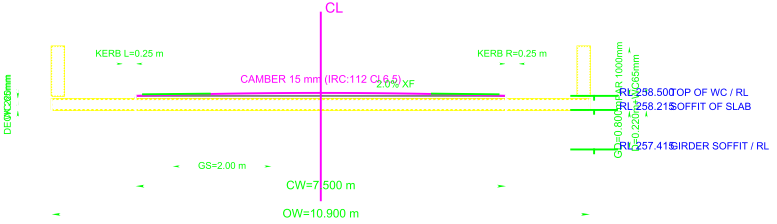















QA-ABT-CAP-001	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-002	Cap projection front/rear	0/0 mm	100x200 / 200x800 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	3.45 m	>= 3.00 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	2.23	>= 1.65	OK
QA-ABT-SL	Sliding FOS	1.80	>= 1.40	OK
QA-ABT-BRG	Base pressure	450.69 kPa	<= 800.00 kPa	OK


80 mm
430 mm
PIPE Ø270 mm
Ø450 mm
Ø650 mm


GAP 161 mm
+ GAP +
JOINT 160 mm
DEPTH 60 mm

(Not to Scale — indicative)

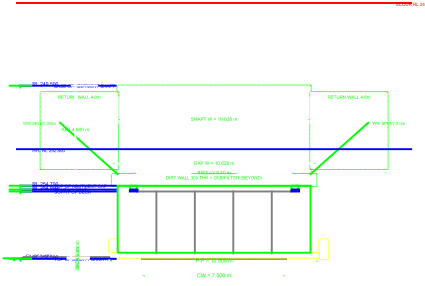

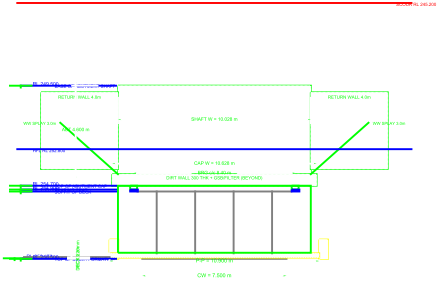

GA-WIT-CAP_ **EEP** Effect cap depth	5 mm	>= 450 mm	OK
GA-WIT-CAP_ **TEN** projection from/rear	0.0 mm	100.250 / 200.633 mm	OK
GA-DW-THK Dirt wall thickness	0 mm	>= 200 mm	OK
GA-DW-TOP Dirt wall to slab soffit	3.48 m	>= 0.35 m	OK
GA-DW-WEEP Weep holes provided	4	1 per 3 m	OK
GA-WIT-OT Overturning FOS	2.23	>= 1.40	OK
GA-WIT-SL Sliding FOS	1.60	>= 1.40	OK
GA-WIT-BPG Base pressure	400.89 kPa	>= 800.80 kPa	OK