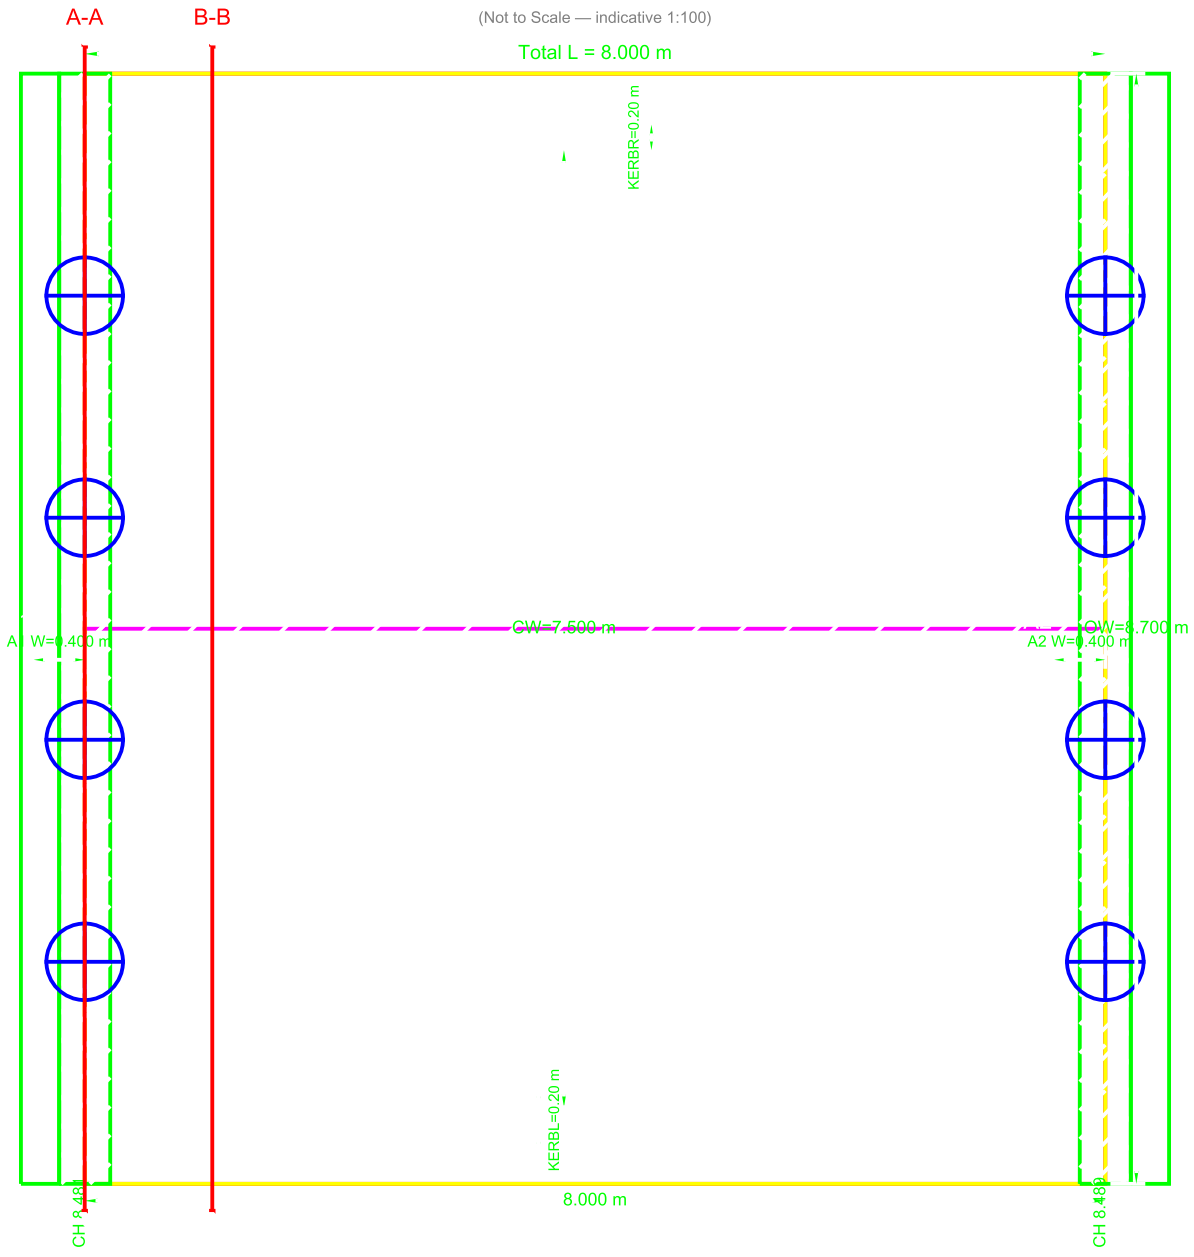
A-A
B-B
Total L = 8.000 m
KERBR=0.20 m
CW=7.500 m
OW=8.700 m
A1 W=0.400 m
A2 W=0.400 m
KERBL=0.20 m
8.000 m
CH 8.48
CH 8.489

(Not to Scale — indicative 1:100)

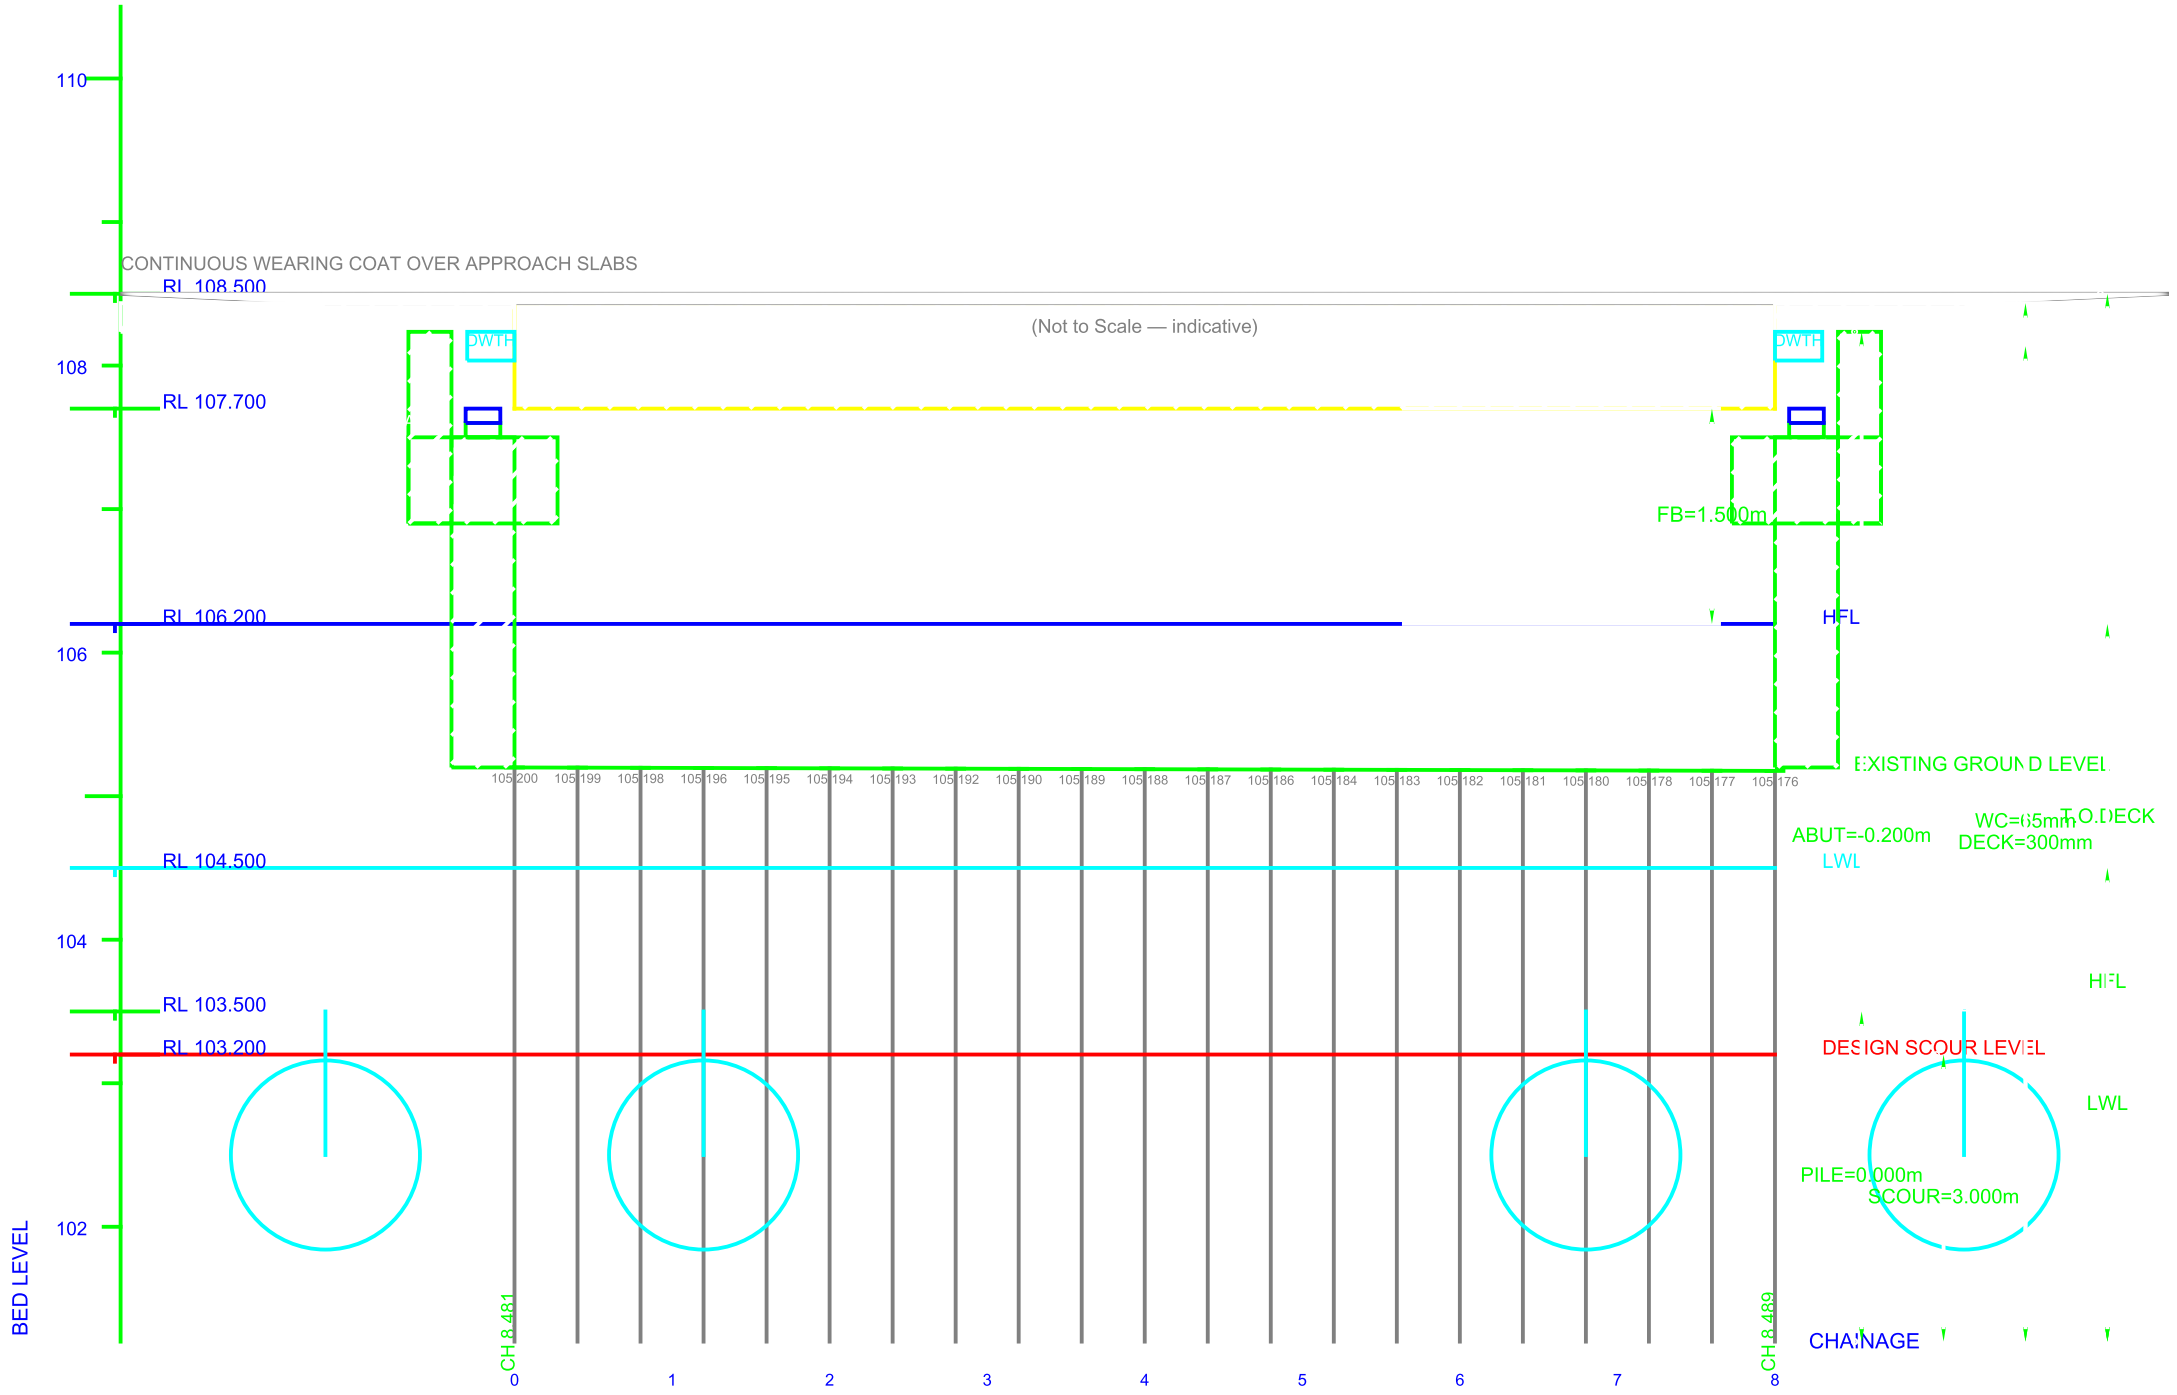CONTINUOUS WEARING COAT OVER APPROACH SLABS
(Not to Scale — indicative)
110
108
106
104
102
BED LEVEL
RL 108.500
RL 107.700
RL 106.200
RL 104.500
RL 103.500
RL 103.200
DWTH
DWTH
FB=1.500m
HFL
EXISTING GROUND LEVEL
105.200
105.199
105.198
105.196
105.195
105.194
105.193
105.192
105.190
105.189
105.188
105.187
105.186
105.184
105.183
105.182
105.181
105.180
105.178
105.177
105.176
ABUT=-0.200m
LWL
WC=65mm
T.O.DECK
DECK=300mm
HFL
DESIGN SCOUR LEVEL
LWL
PILE=0.000m
SCOUR=3.000m
CHAINAGE
CH 8.481
CH 8.489
0
1
2
3
4
5
6
7
8

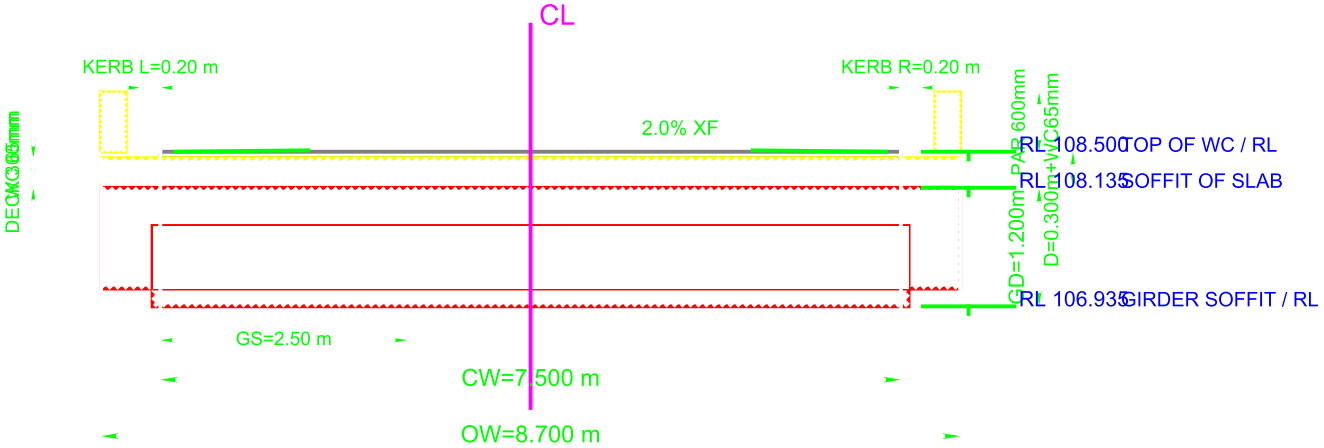
CL
KERB L=0.20 m
KERB R=0.20 m
2.0% XF
DECK 300mm
WC 65mm
PAR 600mm
D=0.300m+WC65mm
GD=1.200m
RL 108.500 TOP OF WC / RL
RL 108.135 SOFFIT OF SLAB
RL 106.935 GIRDER SOFFIT / RL
GS=2.50 m
CW=7.500 m
OW=8.700 m

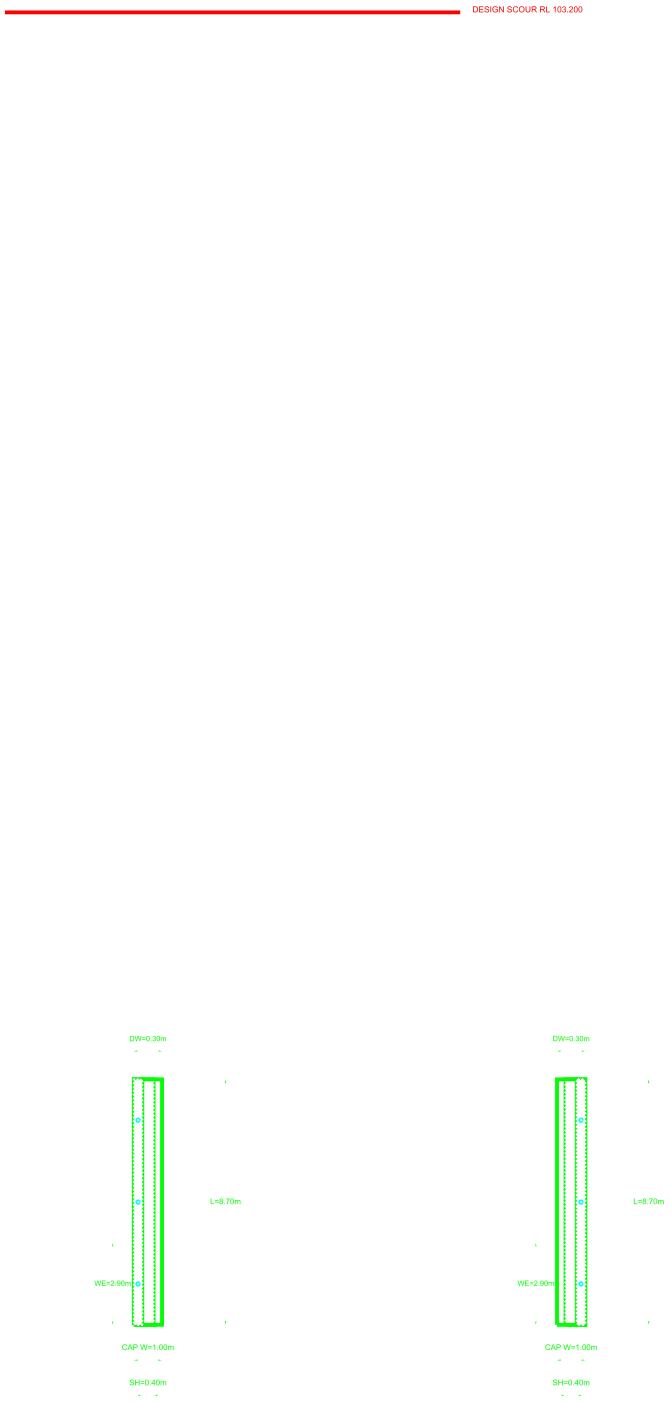
DESIGN SCOUR RL 103.200
DW=0.30m
L=8.70m
WE=2.90m
CAP W=1.00m
SH=0.40m
DW=0.30m
L=8.70m
WE=2.90m
CAP W=1.00m
SH=0.40m


H=2.50m
HFL RL 106.200
Shaft=0.30m
Cap=0.50m


DW 200
H=2.50m
L=8.70m
WW=1.5m

THK=0.30m
L=8.70m

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	0.73 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	3	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	0.30	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	0.68	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	720.94 kPa	<= 250.00 kPa	FAIL


APP THK=0.20m
THK=0.40m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
JOINT 160 mm
DEPTH 80 mm

(Not to Scale — indicative)

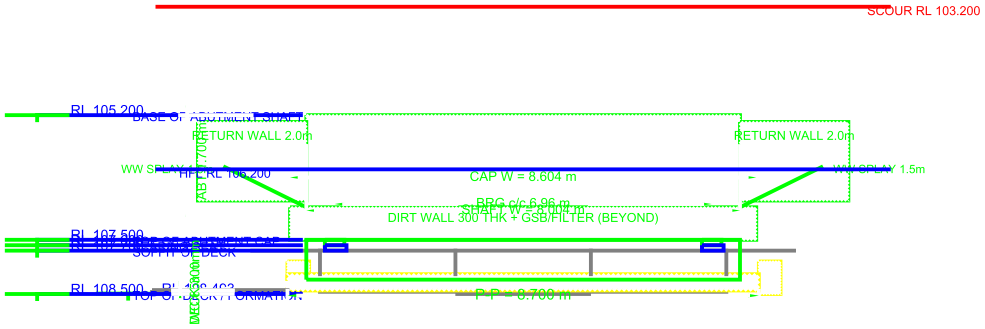
SCOUR RL 103.200
RL 105.200
BASE OF ABUTMENT SHAFT
RETURN WALL 2.0m
RETURN WALL 2.0m
ABT 1700mm
WW SPLAY 1.5m
HFL RL 106.200
WW SPLAY 1.5m
CAP W = 8.604 m
BRG c/c 6.96 m
SHAFT W = 8.004 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 107.500
SOFFIT OF DECK
RL 108.500
TOP OF DECK / FORMATION
P-P = 8.700 m
CW = 7.500 m

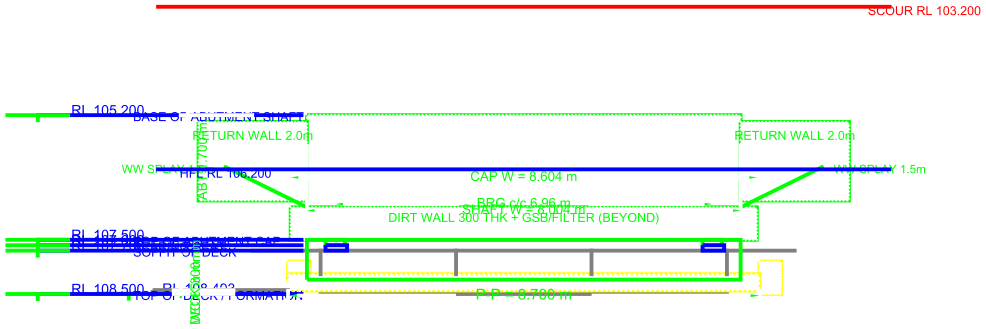
SCOUR RL 103.200
RL 105.200
BASE OF ABUTMENT SHAFT
RETURN WALL 2.0m
RETURN WALL 2.0m
ABT 1700mm
WW SPLAY 1.5m
HFL RL 106.200
WW SPLAY 1.5m
CAP W = 8.604 m
BRG c/c 6.96 m
SHAFT W = 8.004 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 107.500
SOFFIT OF DECK
RL 108.500
TOP OF DECK / FORMATION
P-P = 8.700 m
CW = 7.500 m

QA-ABT-C	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-C	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-TI	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-T	Dirt wall to slab soffit	0.73 m	>= 0.30 m	OK
QA-DW-W	Weep holes provided	3	1 per 3 m	OK
QA-ABT-C	Overturning FOS	0.30	>= 1.40	FAIL
QA-ABT-S	Sliding FOS	0.68	>= 1.40	FAIL
QA-ABT-E	Base pressure	720.94 kPa	<= 250.00 kPa	FAIL