(Not to Scale — indicative 1:100)

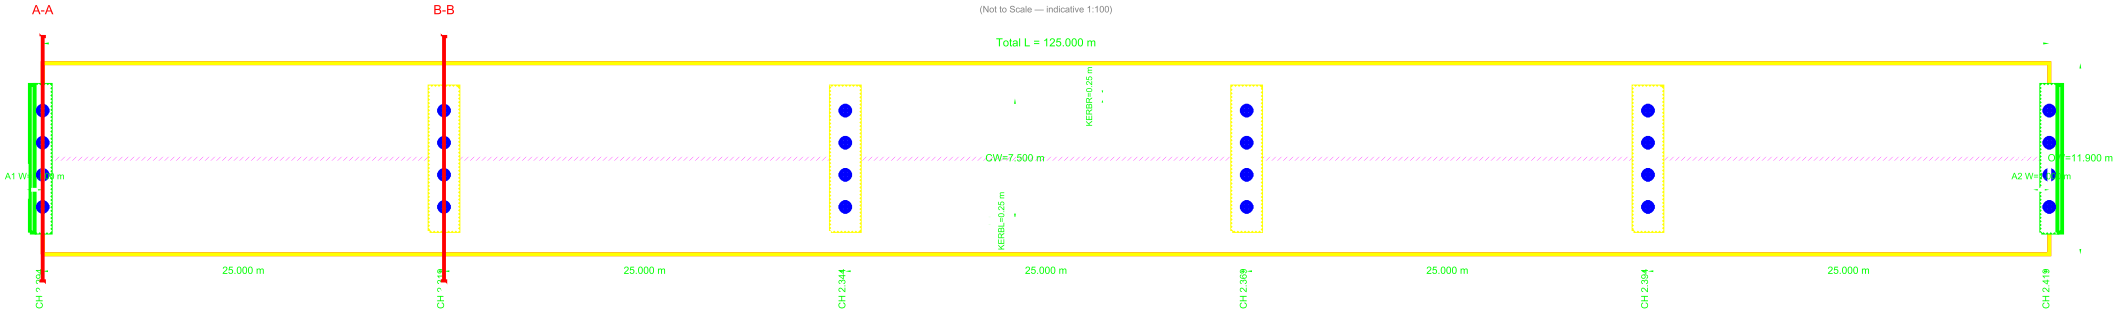
A-A
B-B
Total L = 125.000 m
KERBR=0.25 m
CW=7.500 m
KERBL=0.25 m
A1 W=1.00 m
A2 W=1.00 m
CW=11.900 m
25.000 m
25.000 m
25.000 m
25.000 m
25.000 m
CH 2.294
CH 2.319
CH 2.344
CH 2.369
CH 2.394
CH 2.419

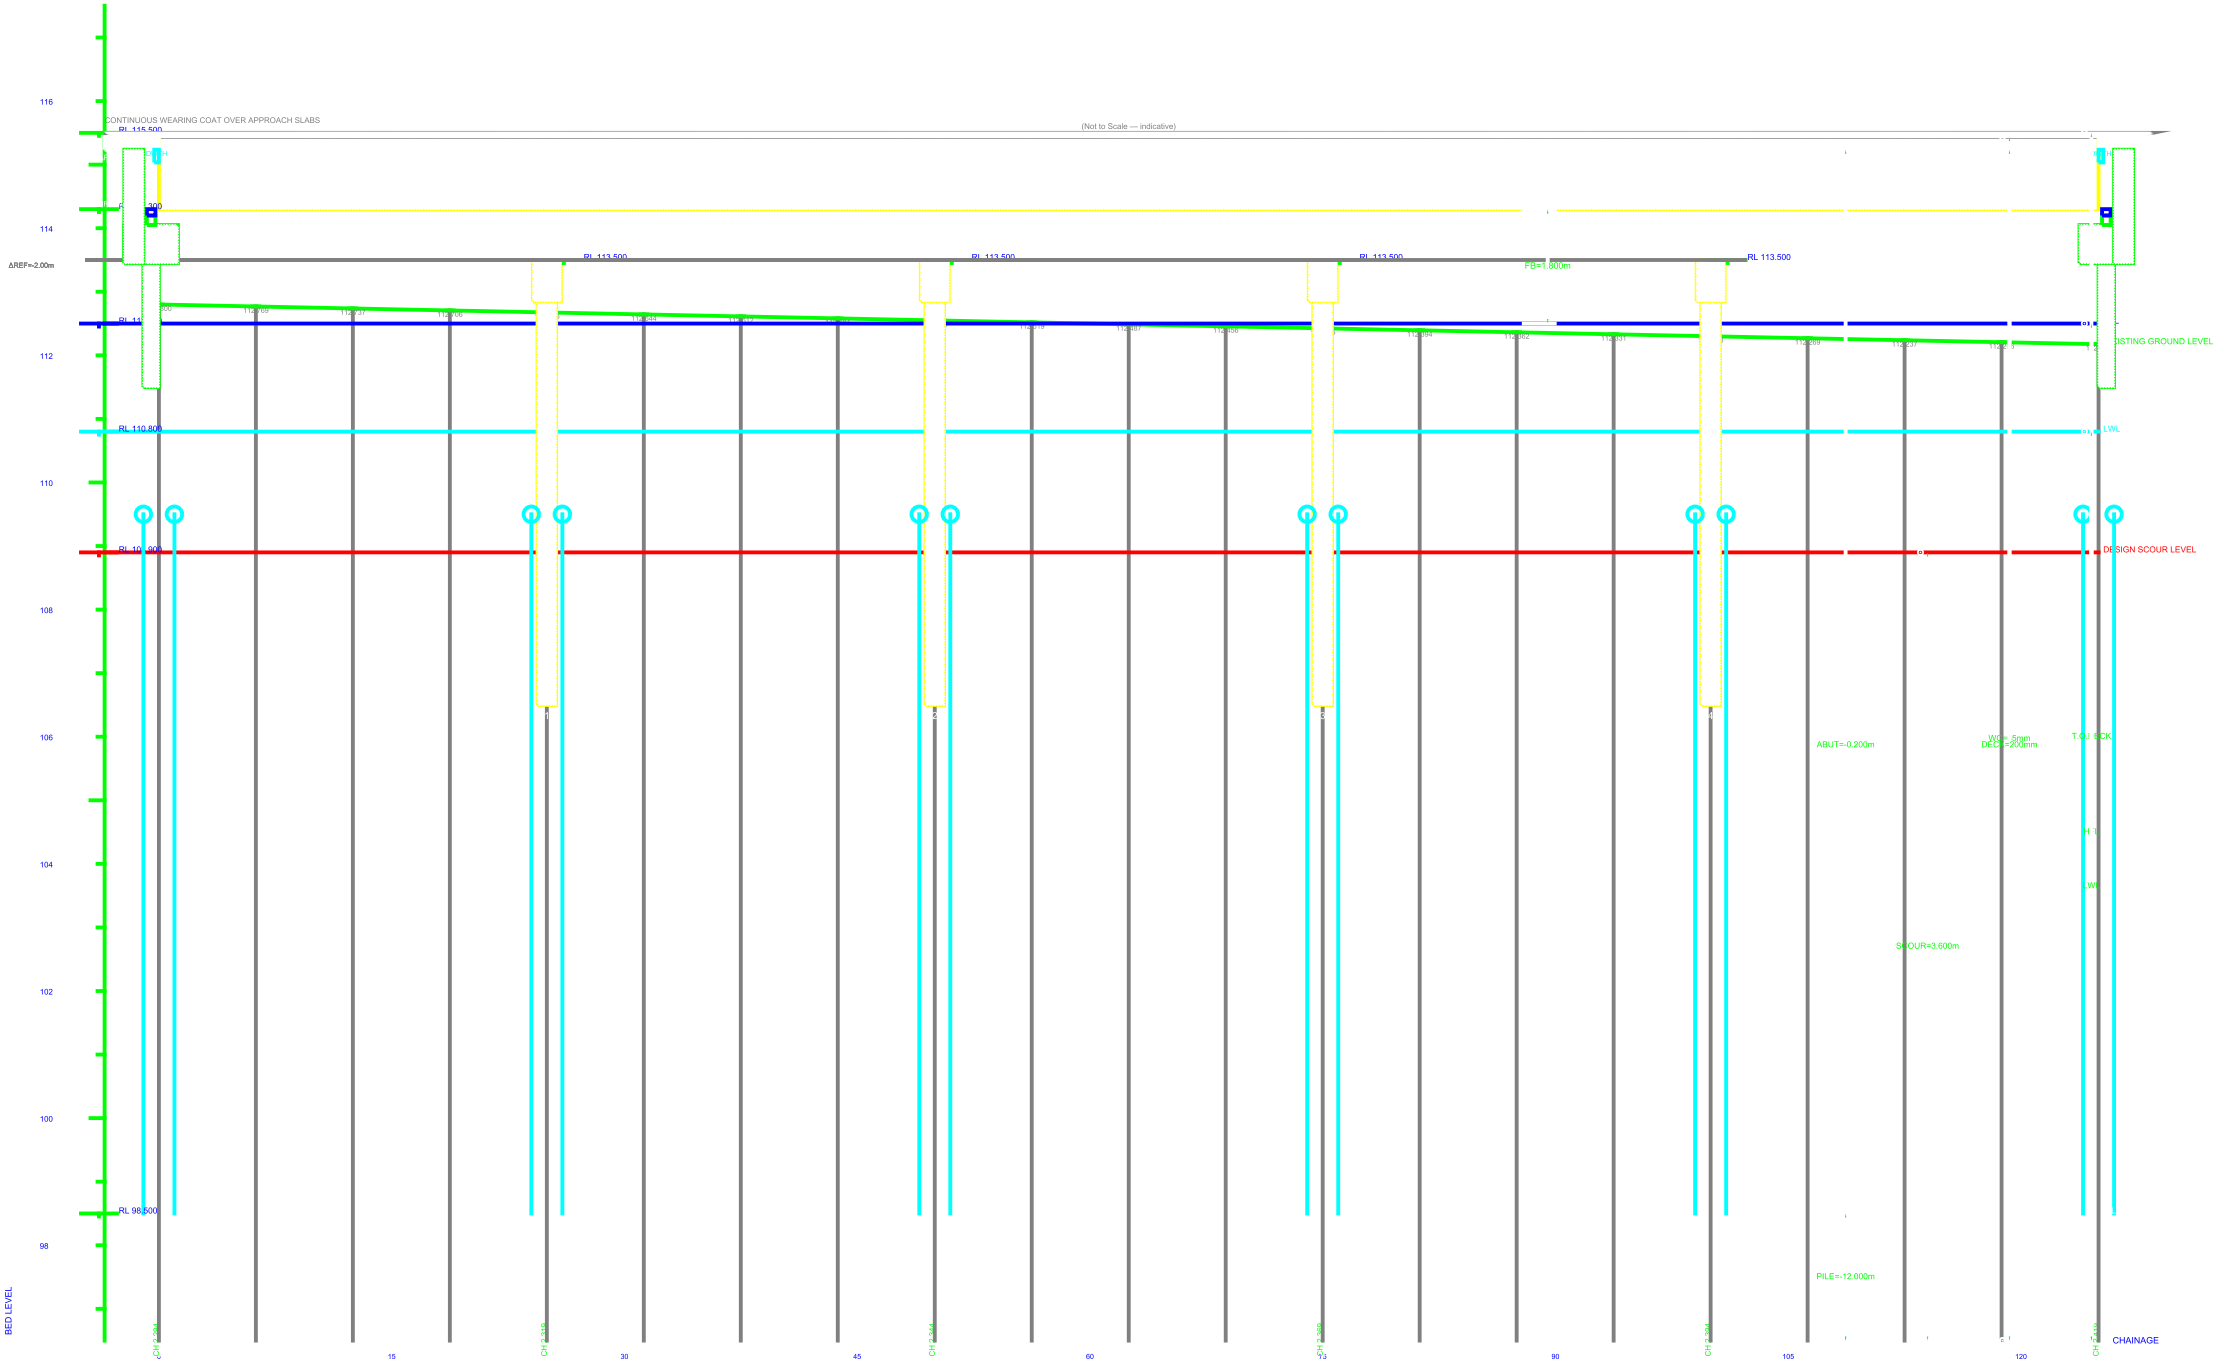
116
114
112
110
108
106
104
102
100
98
BED LEVEL
CONTINUOUS WEARING COAT OVER APPROACH SLABS
RL 115.500
(Not to Scale — indicative)
ΔREF=-2.00m
RL 113.500
RL 113.500
RL 113.500
RL 113.500
FB=1.800m
RL 110.800
LWL
EXISTING GROUND LEVEL
DESIGN SCOUR LEVEL
ABUT=-0.200m
WC= 5mm
DECK=200mm
T.O.DECK
LWL
SCOUR=3.600m
RL 98.500
PILE=-12.000m
CHAINAGE
15
30
45
60
90
105
120

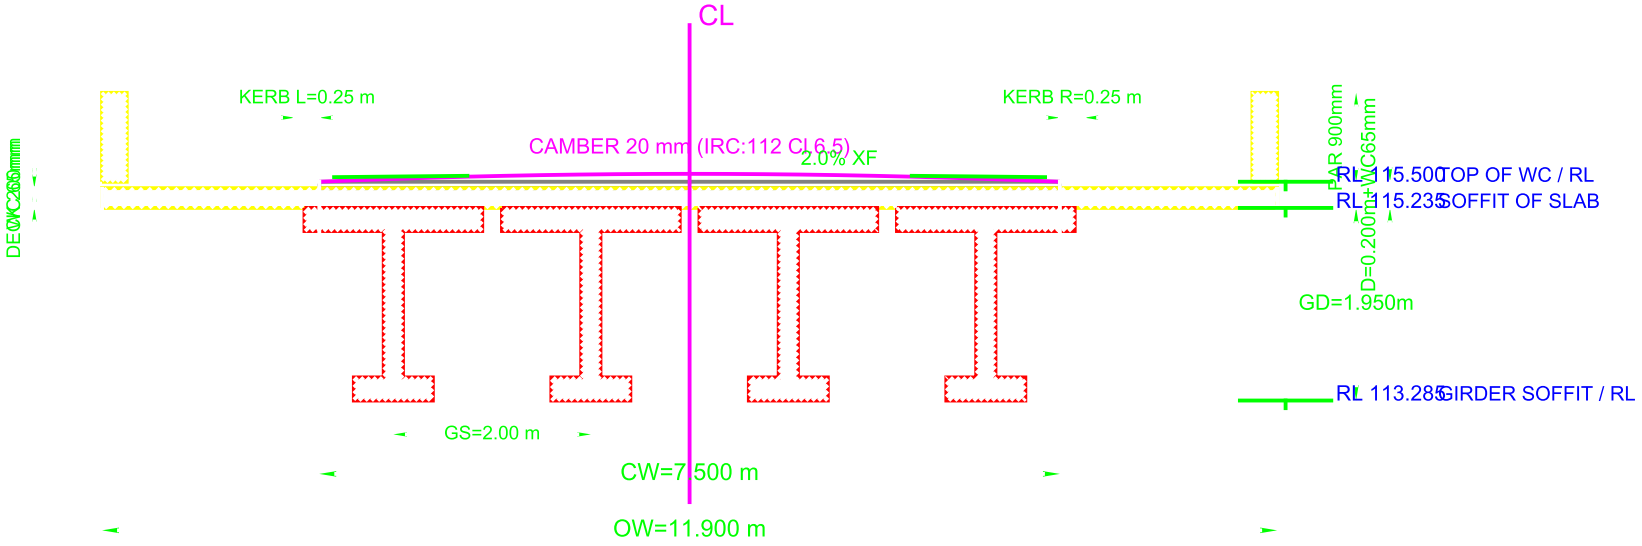
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=1.950m
RL 113.285 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=11.900 m


Cap L = 3.200 m
Cap W = 3.200 m

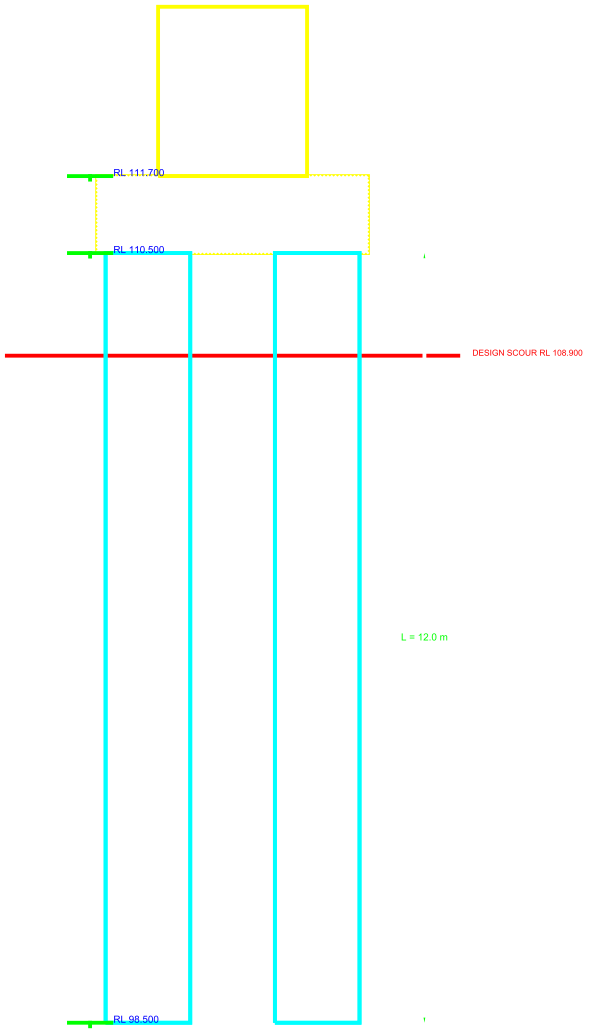
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.00m

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
GAP
JOINT 160 mm
DEPTH 80 mm

(Not to Scale — indicative)

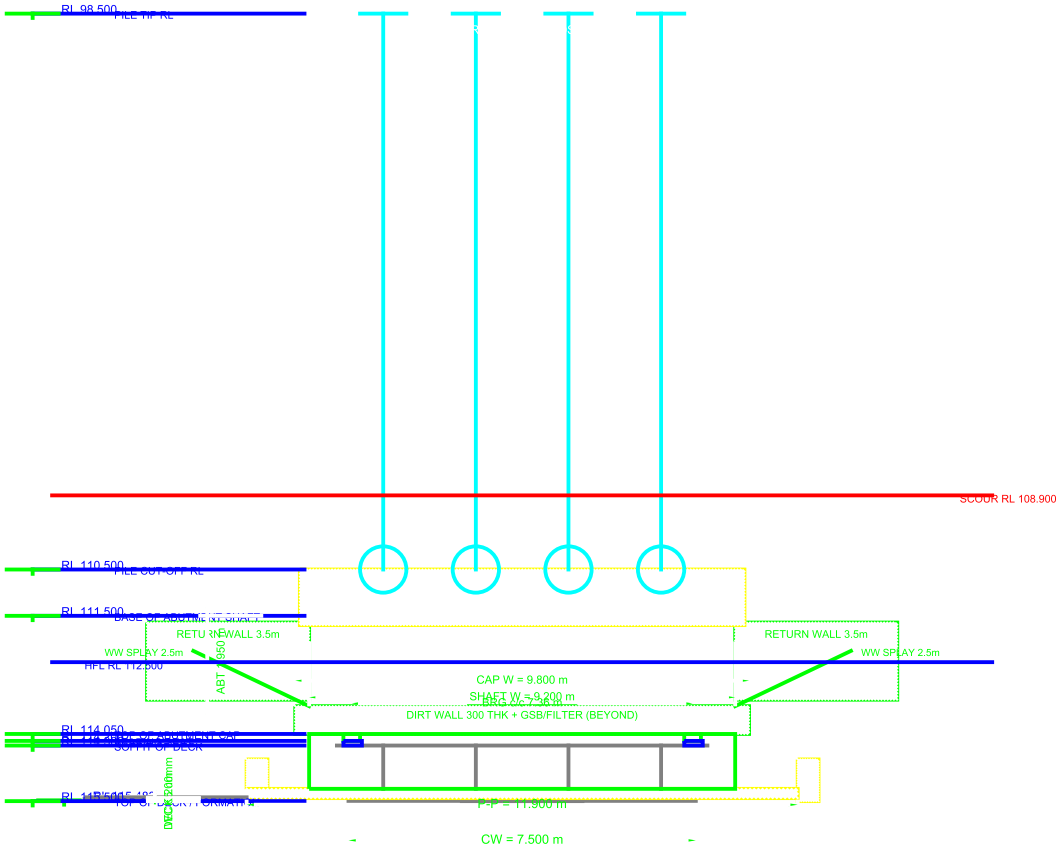
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950 mm
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
BASE OF ABUTMENT CAP
SOFFIT OF DECK
DECK 200mm
RL 115.500
TOP OF DECK / FORMATION
P-P = 11.900 m
CW = 7.500 m

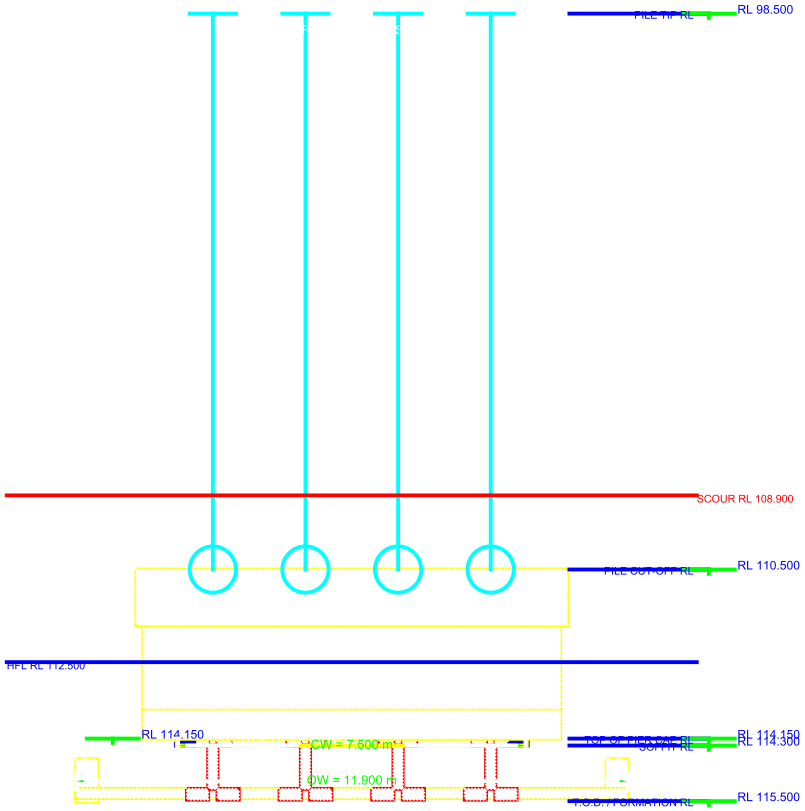
PILE TIP RL
RL 98.500
SCOUR RL 108.900
PILE CUT-OFF RL
RL 110.500
HFL RL 112.500
RL 114.150
CW = 7.500 m
OW = 11.900 m
TOP OF PIER CAP RL
RL 114.150
SOFFIT RL
RL 114.300
T.O.D. / FORMATION RL
RL 115.500

QA-ABT-CA	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CA	Cap projection front/rear	0/0 mm	100-250 / 250-600 m	OK
QA-DW-THI	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOI	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BR	Base pressure	159.91 kPa	<= 350.00 kPa	OK