(Not to Scale — indicative 1:100)

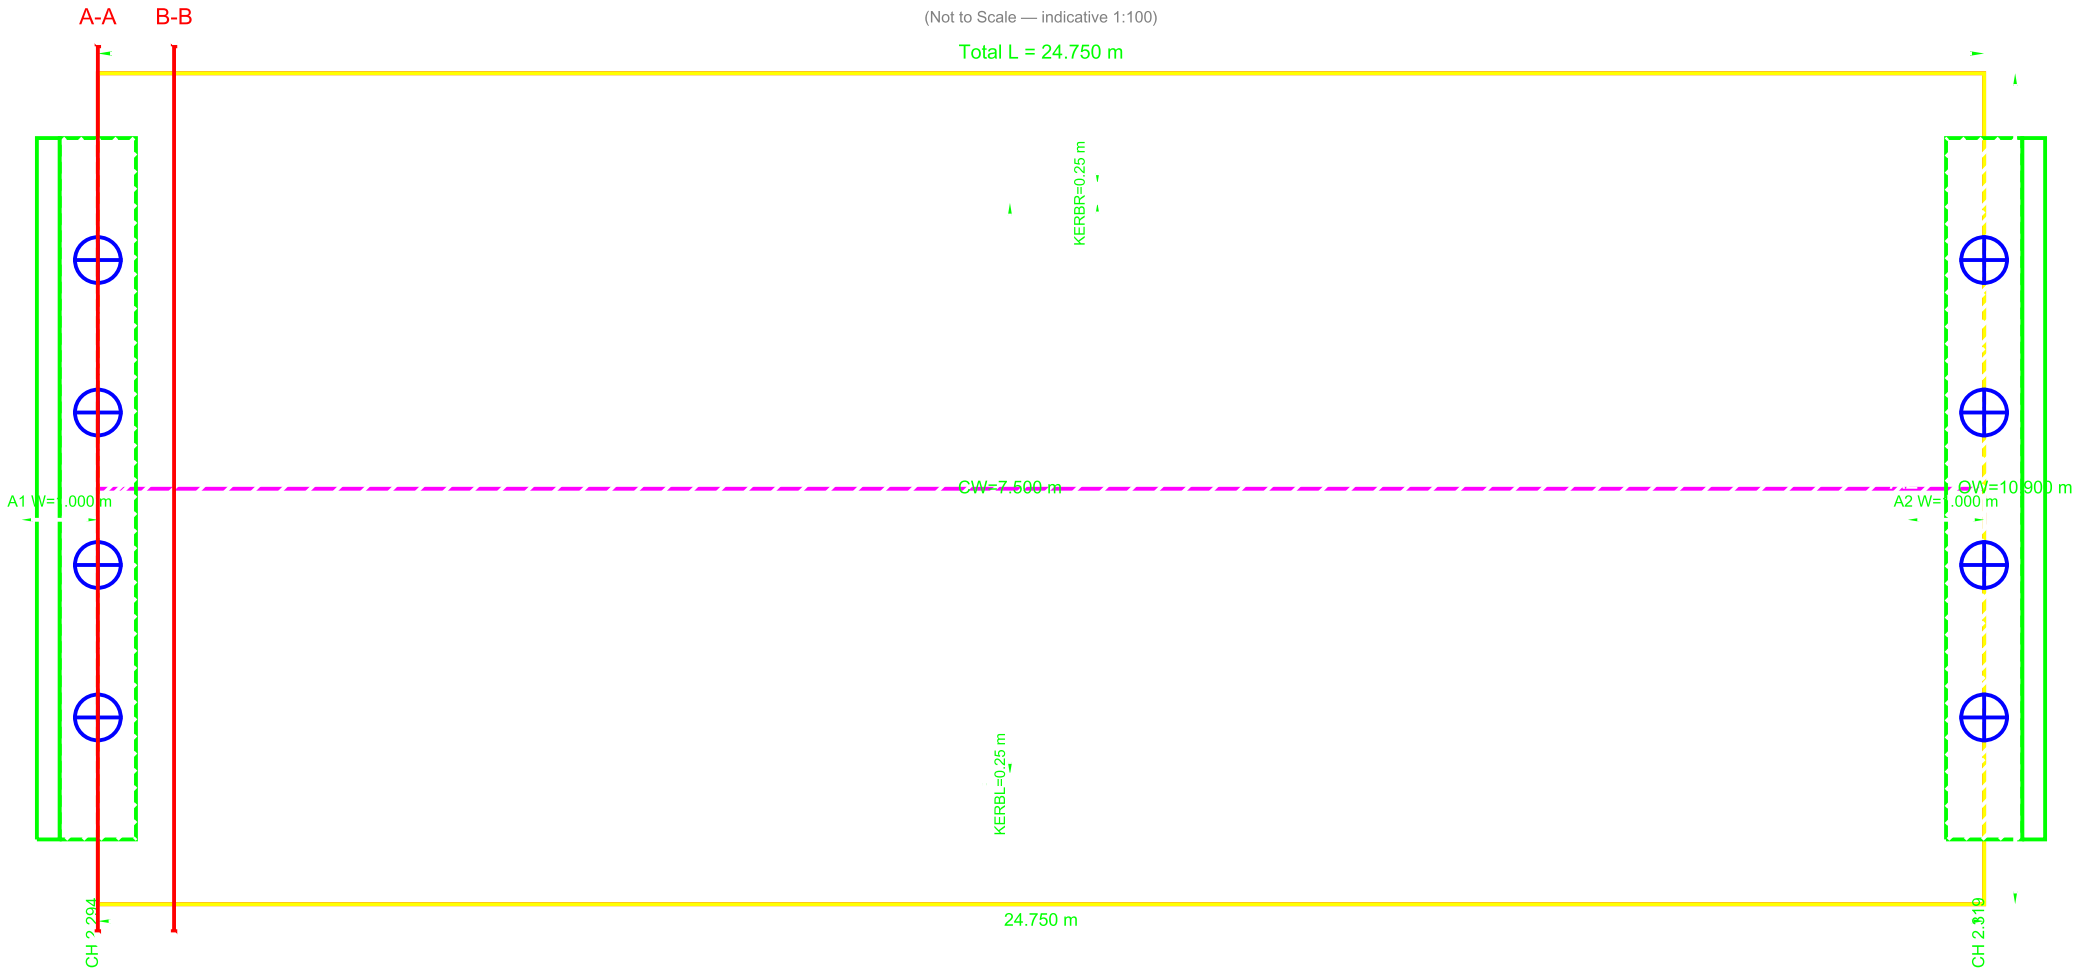
A-A
B-B
Total L = 24.750 m
KERBR=0.25 m
A1 W=1.000 m
CW=7.500 m
OW=10.900 m
A2 W=1.000 m
KERBL=0.25 m
24.750 m
CH 2.294
CH 2.319

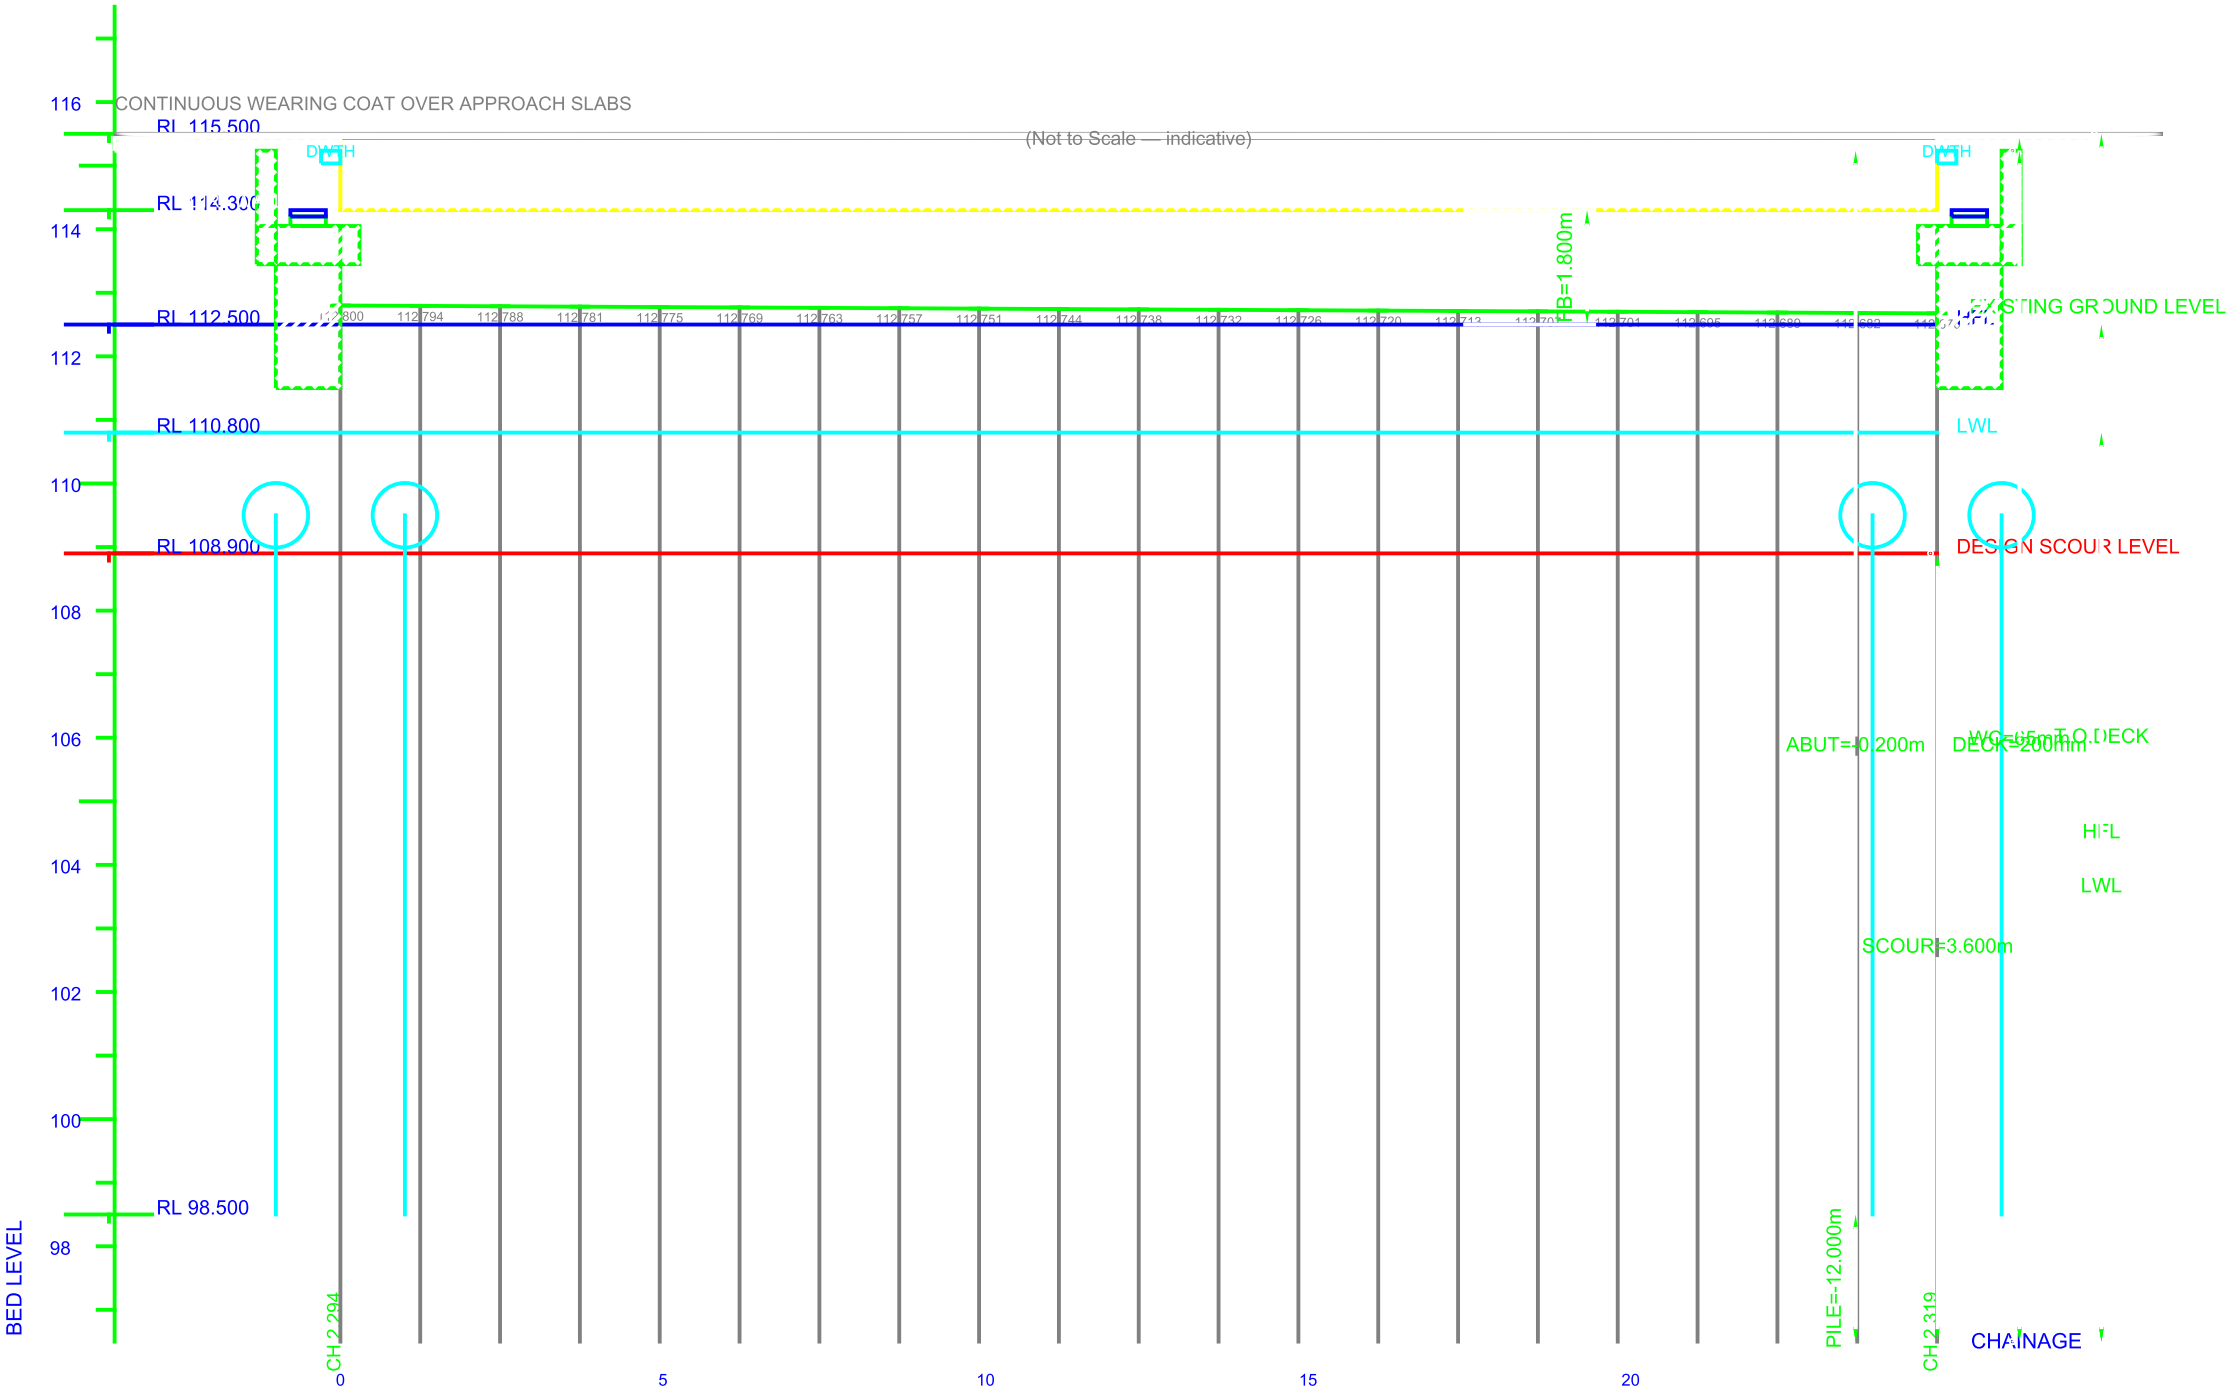CONTINUOUS WEARING COAT OVER APPROACH SLABS
(Not to Scale — indicative)
116
RL 115.500
DWTH
DWTH
RL 114.300
114
RL 112.500
112
112.800
112.794
112.788
112.781
112.775
112.769
112.763
112.757
112.751
112.744
112.738
112.732
112.726
112.720
112.713
112.707
112.701
112.695
112.689
112.682
112.676
FB=1.800m
EXISTING GROUND LEVEL
HFL
RL 110.800
LWL
110
RL 108.900
DESIGN SCOUR LEVEL
108
106
ABUT=-0.200m
WC=65mm T.O.DECK
DECK=200mm
HFL
104
LWL
SCOUR=3.600m
102
100
RL 98.500
98
BED LEVEL
PILE=-12.000m
CH 2.294
CH 2.319
CHAINAGE
0
5
10
15
20

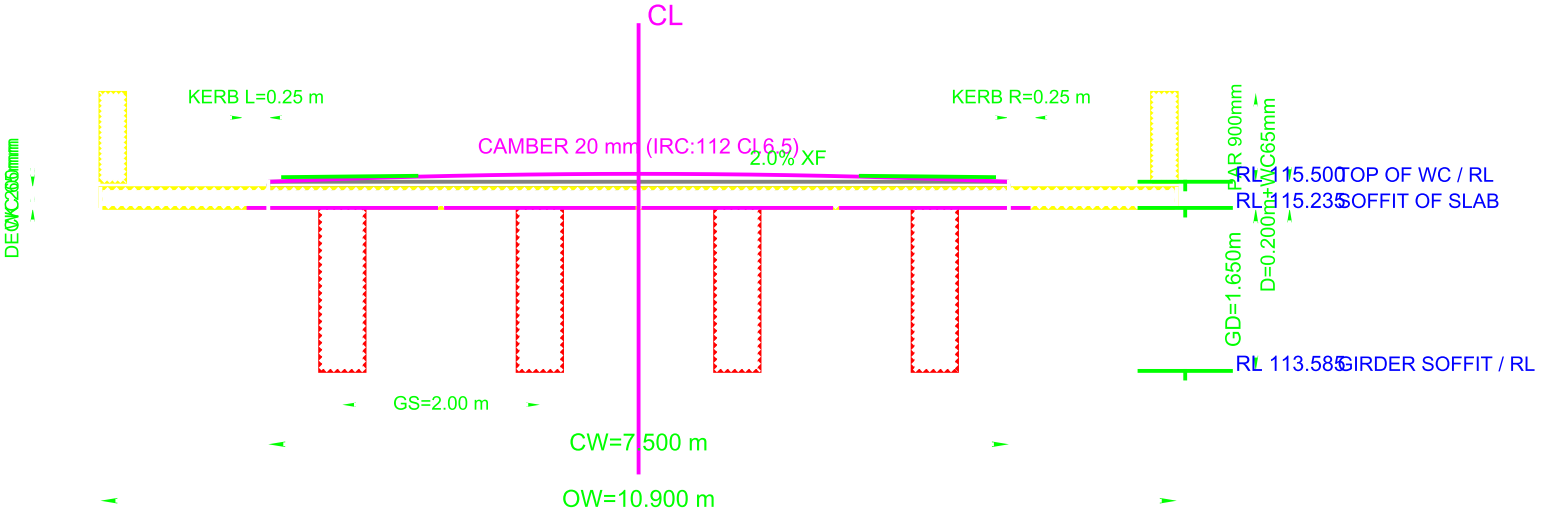
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
GD=1.650m
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
RL 113.585 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=10.900 m


Cap L = 3.200 m
Cap W = 3.200 m

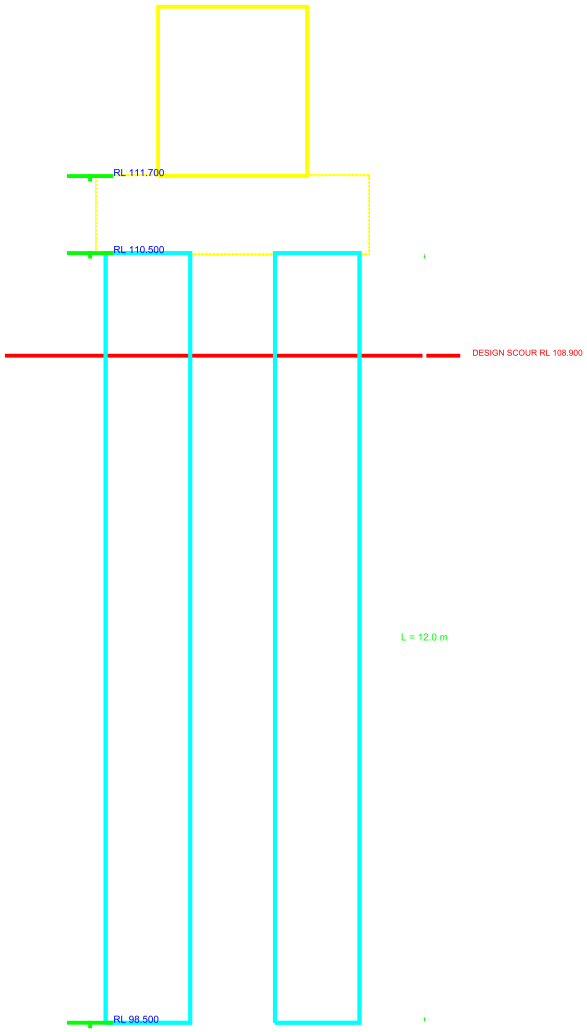
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.60m

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
GAP
JOINT 160 mm
DEPTH 80 mm

(Not to Scale — indicative)

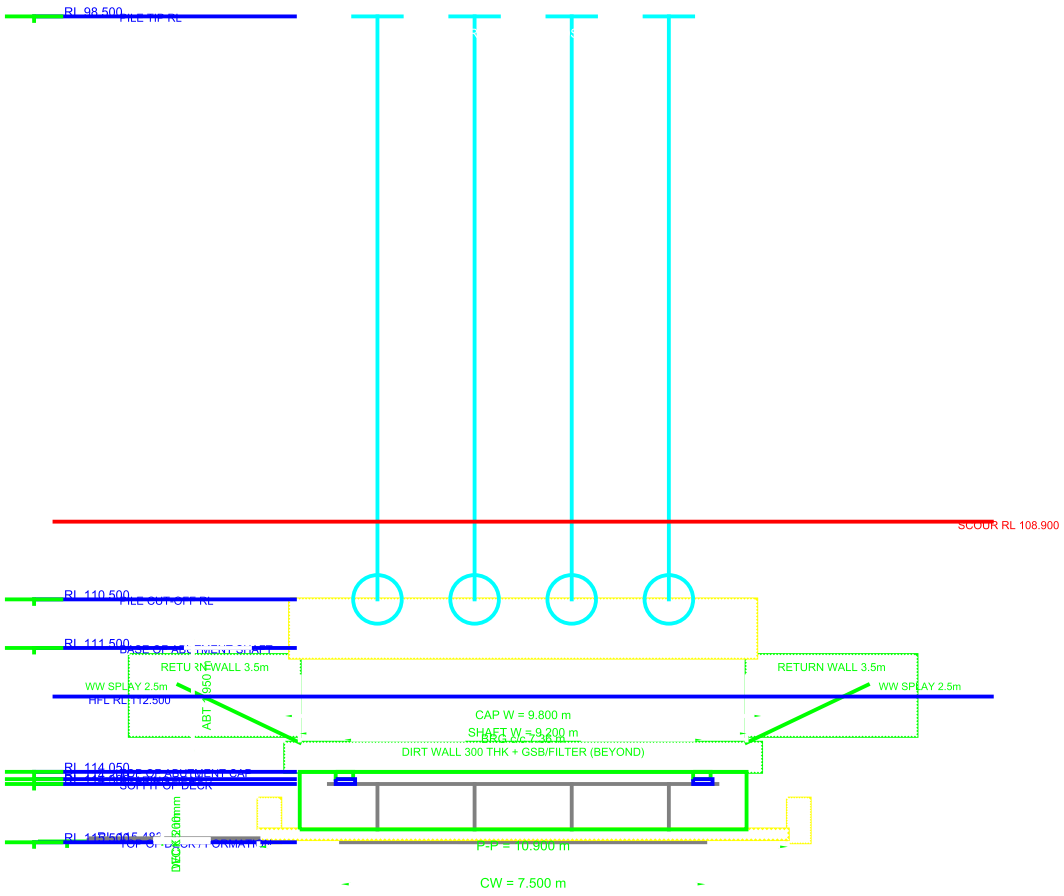
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
SOFFIT OF DECK
DECK 200mm
P-P = 10.900 m
CW = 7.500 m

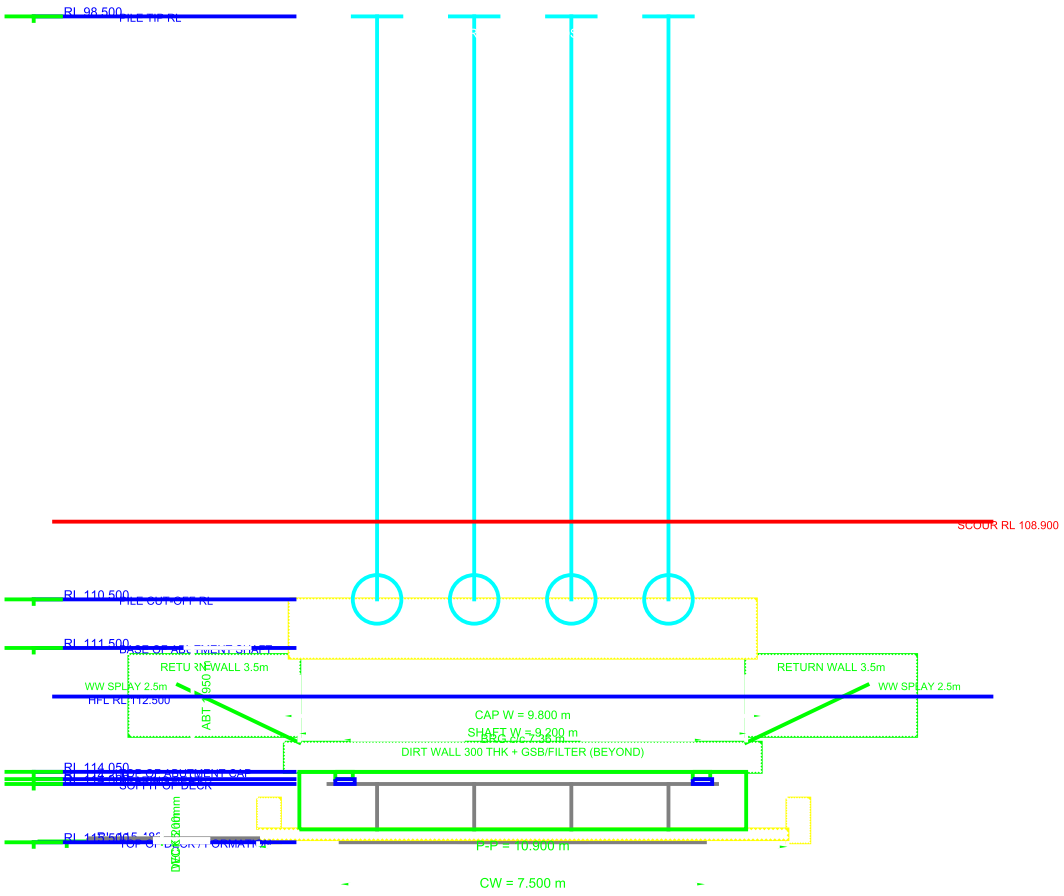
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
SOFFIT OF DECK
DECK 200mm
P-P = 10.900 m
CW = 7.500 m

QA-ABT-CA	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CA	Cap projection front/rear	0/0 mm	100-250 / 250-600 m	OK
QA-DW-TH	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TO	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BF	Base pressure	159.91 kPa	<= 350.00 kPa	OK