(Not to Scale — indicative 1:100)

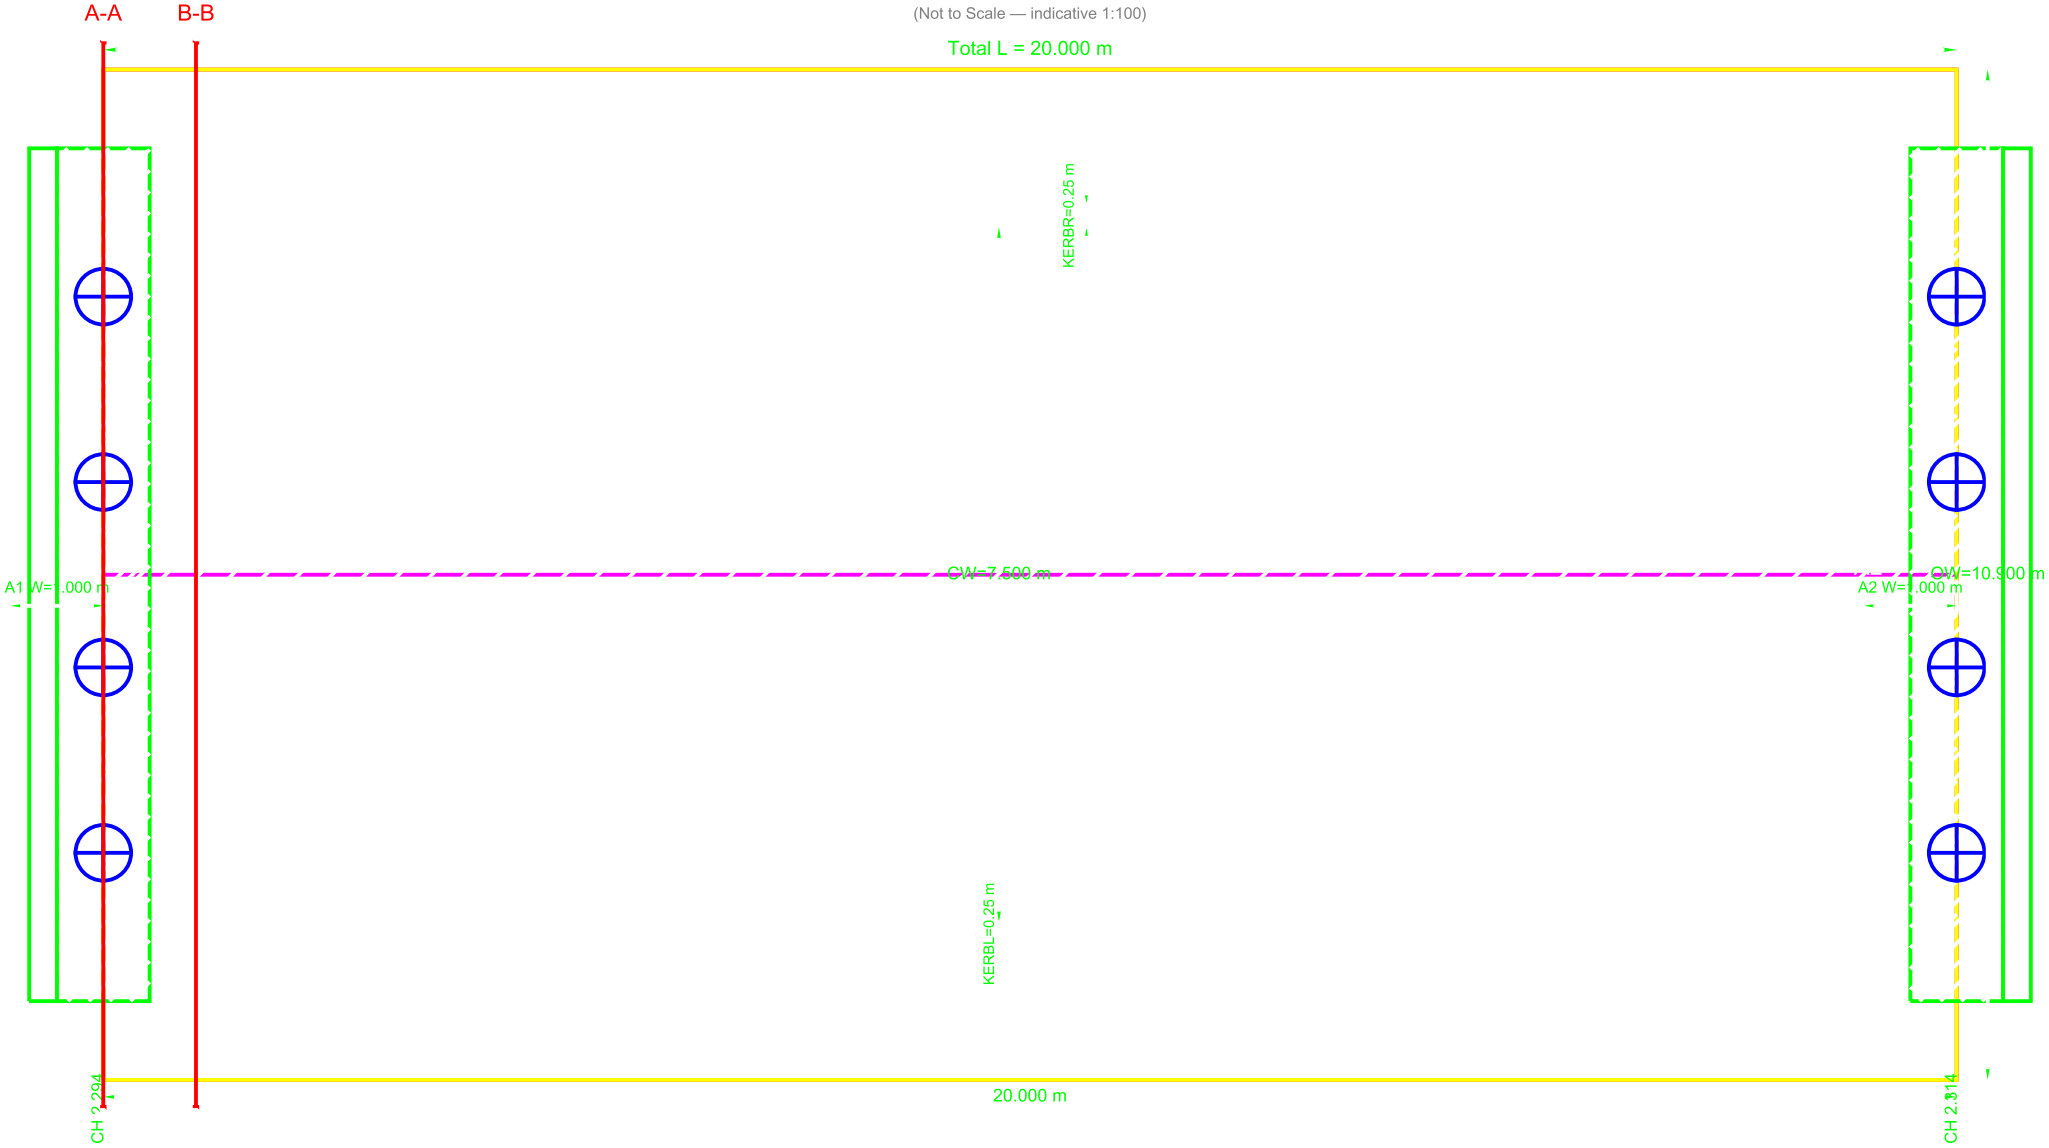
A-A
B-B
Total L = 20.000 m
KERBR=0.25 m
A1 W=1.000 m
CW=7.500 m
A2 W=1.000 m
OW=10.900 m
KERBL=0.25 m
20.000 m
CH 2.294
CH 2.314

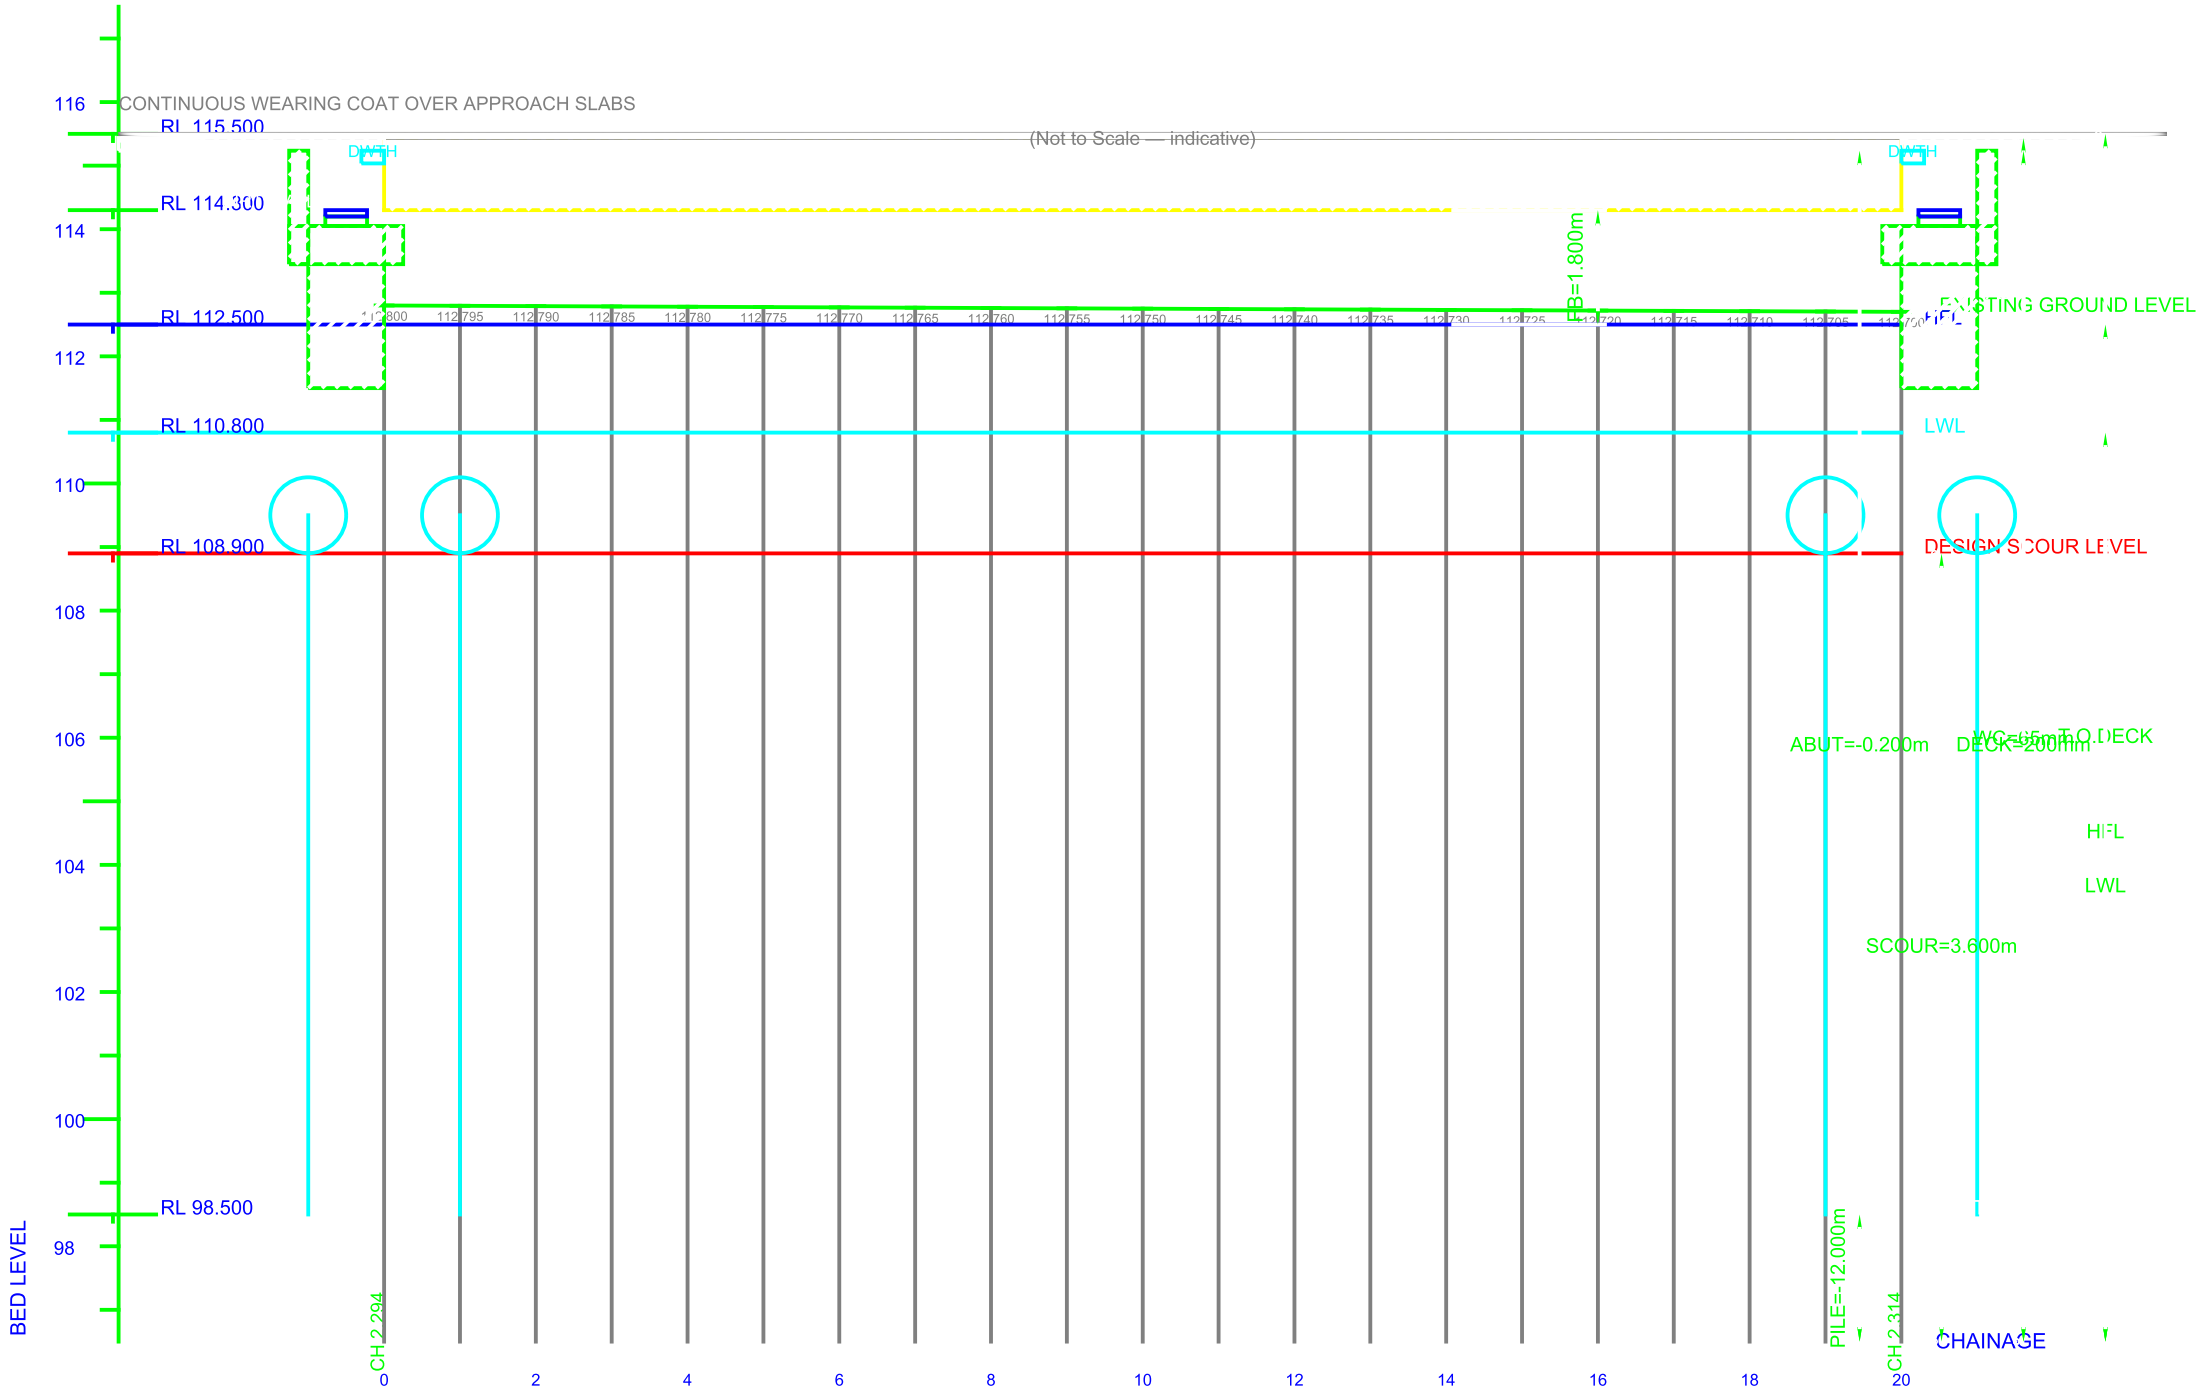
CONTINUOUS WEARING COAT OVER APPROACH SLABS
(Not to Scale — indicative)
116
RL 115.500
DWTH
DWTH
RL 114.300
114
RL 112.500
112
RL 110.800
110
RL 108.900
108
106
104
102
100
RL 98.500
98
BED LEVEL
112.800
112.795
112.790
112.785
112.780
112.775
112.770
112.765
112.760
112.755
112.750
112.745
112.740
112.735
112.730
112.725
112.720
112.715
112.710
112.705
112.700
FB=1.800m
HFL
EXISTING GROUND LEVEL
LWL
DESIGN SCOUR LEVEL
ABUT=-0.200m
DECK=200mm
WC=65mm
T.O.DECK
HFL
LWL
SCOUR=3.600m
PILE=-12.000m
CH 2.294
CH 2.314
CHAINAGE
0
2
4
6
8
10
12
14
16
18
20

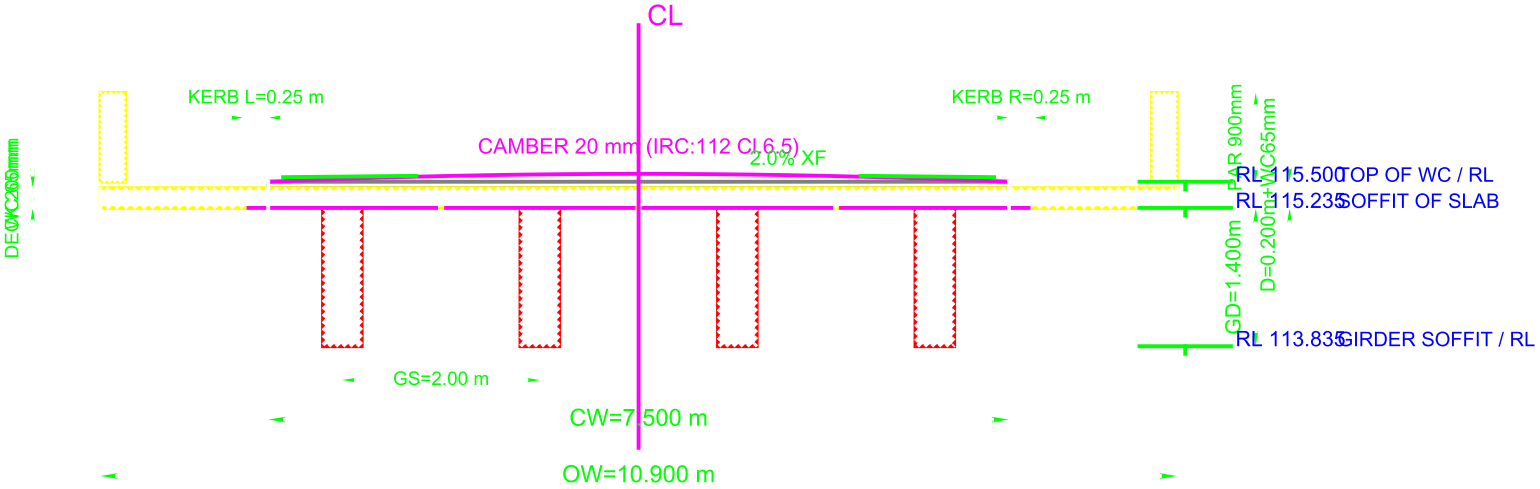
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 265mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=1.400m
RL 113.835 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=10.900 m


Cap L = 3.200 m
Cap W = 3.200 m

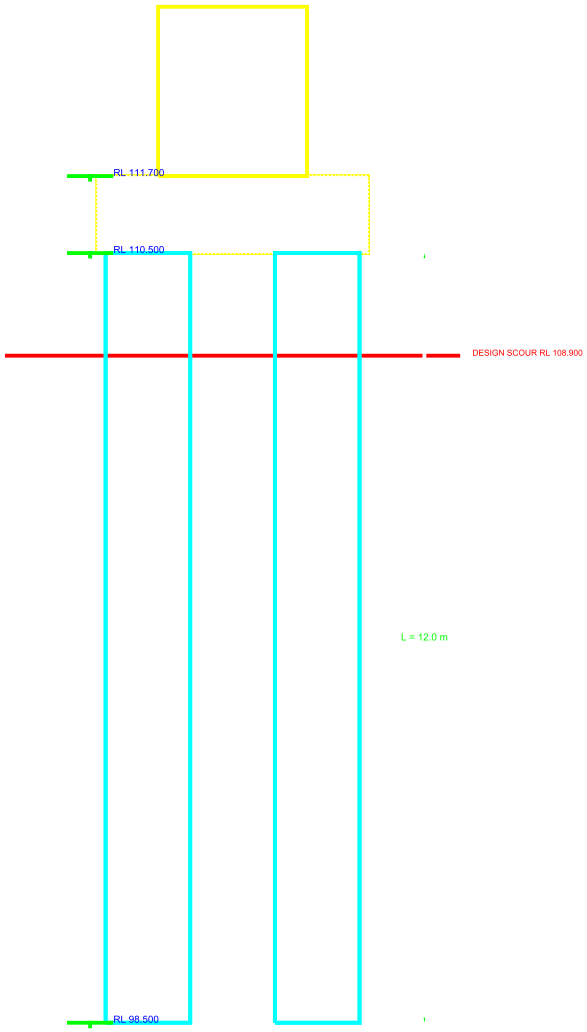
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.00m

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▼ GAP ▼
DEPTH 80 mm
JOINT 160 mm

(Not to Scale — indicative)

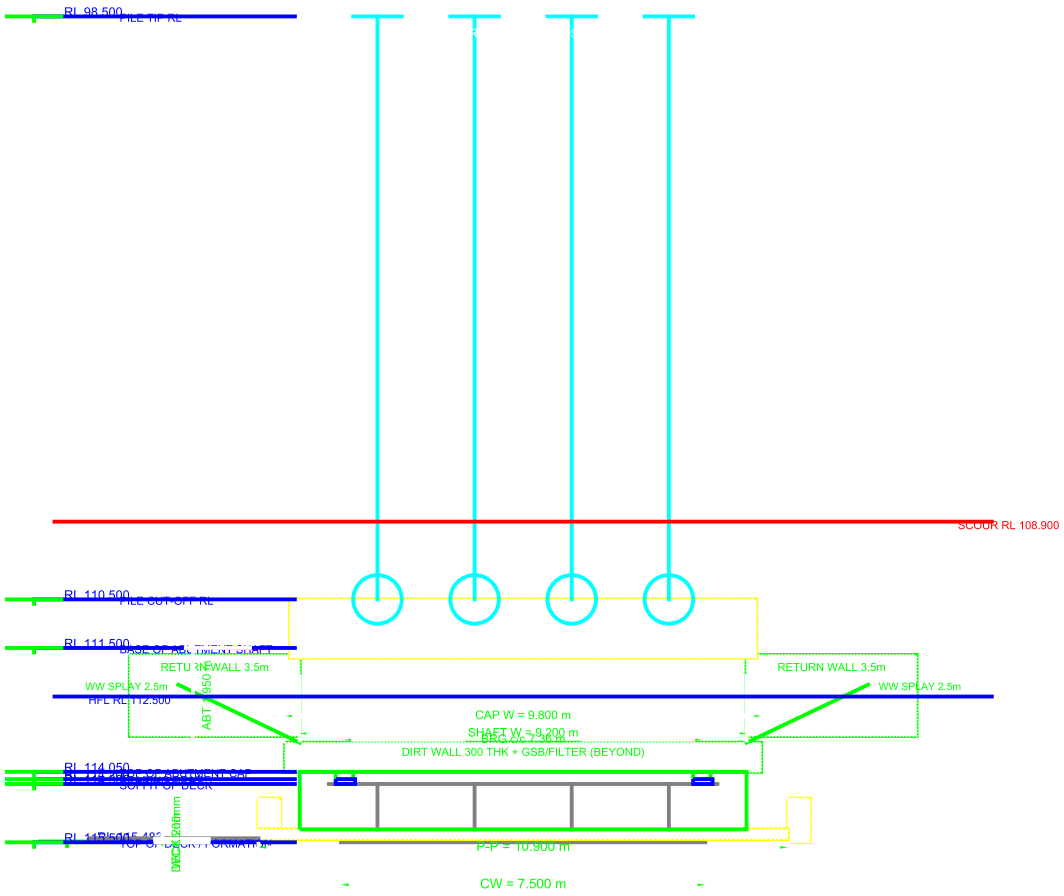
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950 mm
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
BASE OF ABUTMENT CAP
SOFFIT OF DECK
DECK 1200mm
RL 115.500
TOP OF DECK / FORMATION
P-P = 10.900 m
CW = 7.500 m

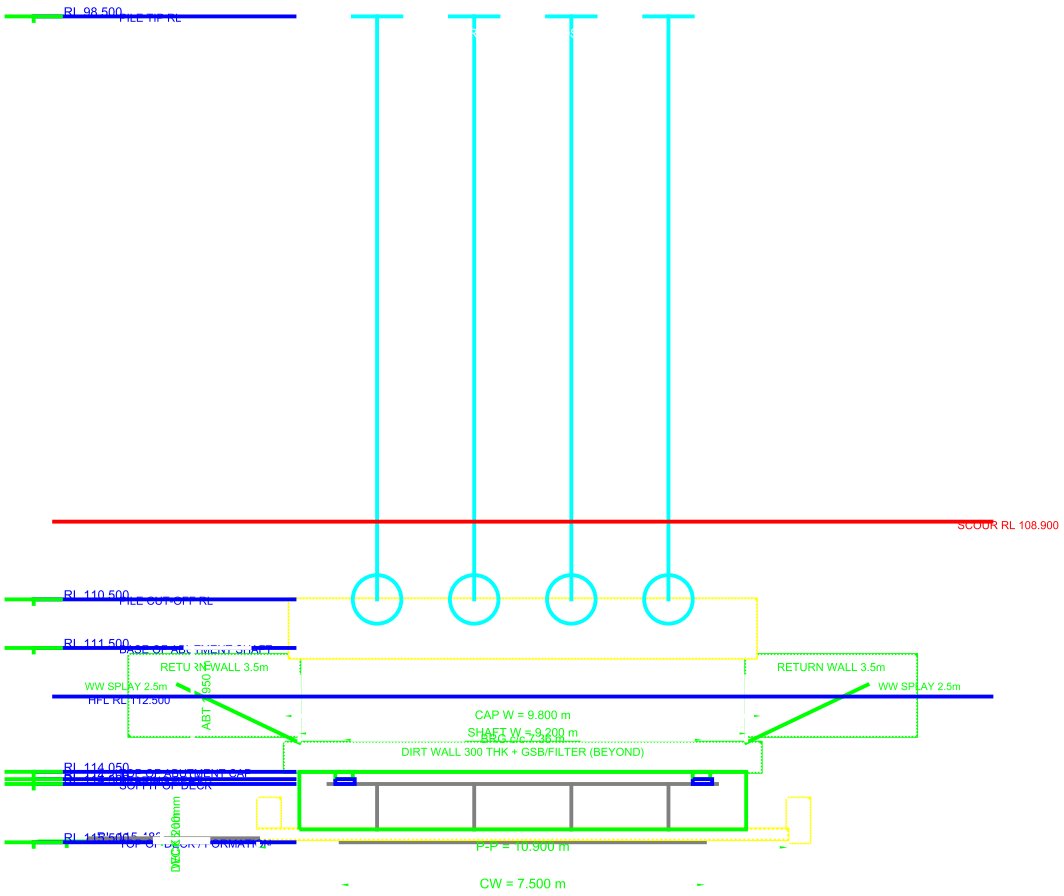
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950 mm
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
BASE OF ABUTMENT CAP
SOFFIT OF DECK
DECK 1200mm
RL 115.500
TOP OF DECK / FORMATION
P-P = 10.900 m
CW = 7.500 m

QA-ABT-CA	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CA	Cap projection front/rear	0/0 mm	100-250 / 250-600 m	OK
QA-DW-TH	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TO	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WE	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BF	Base pressure	159.91 kPa	<= 350.00 kPa	OK