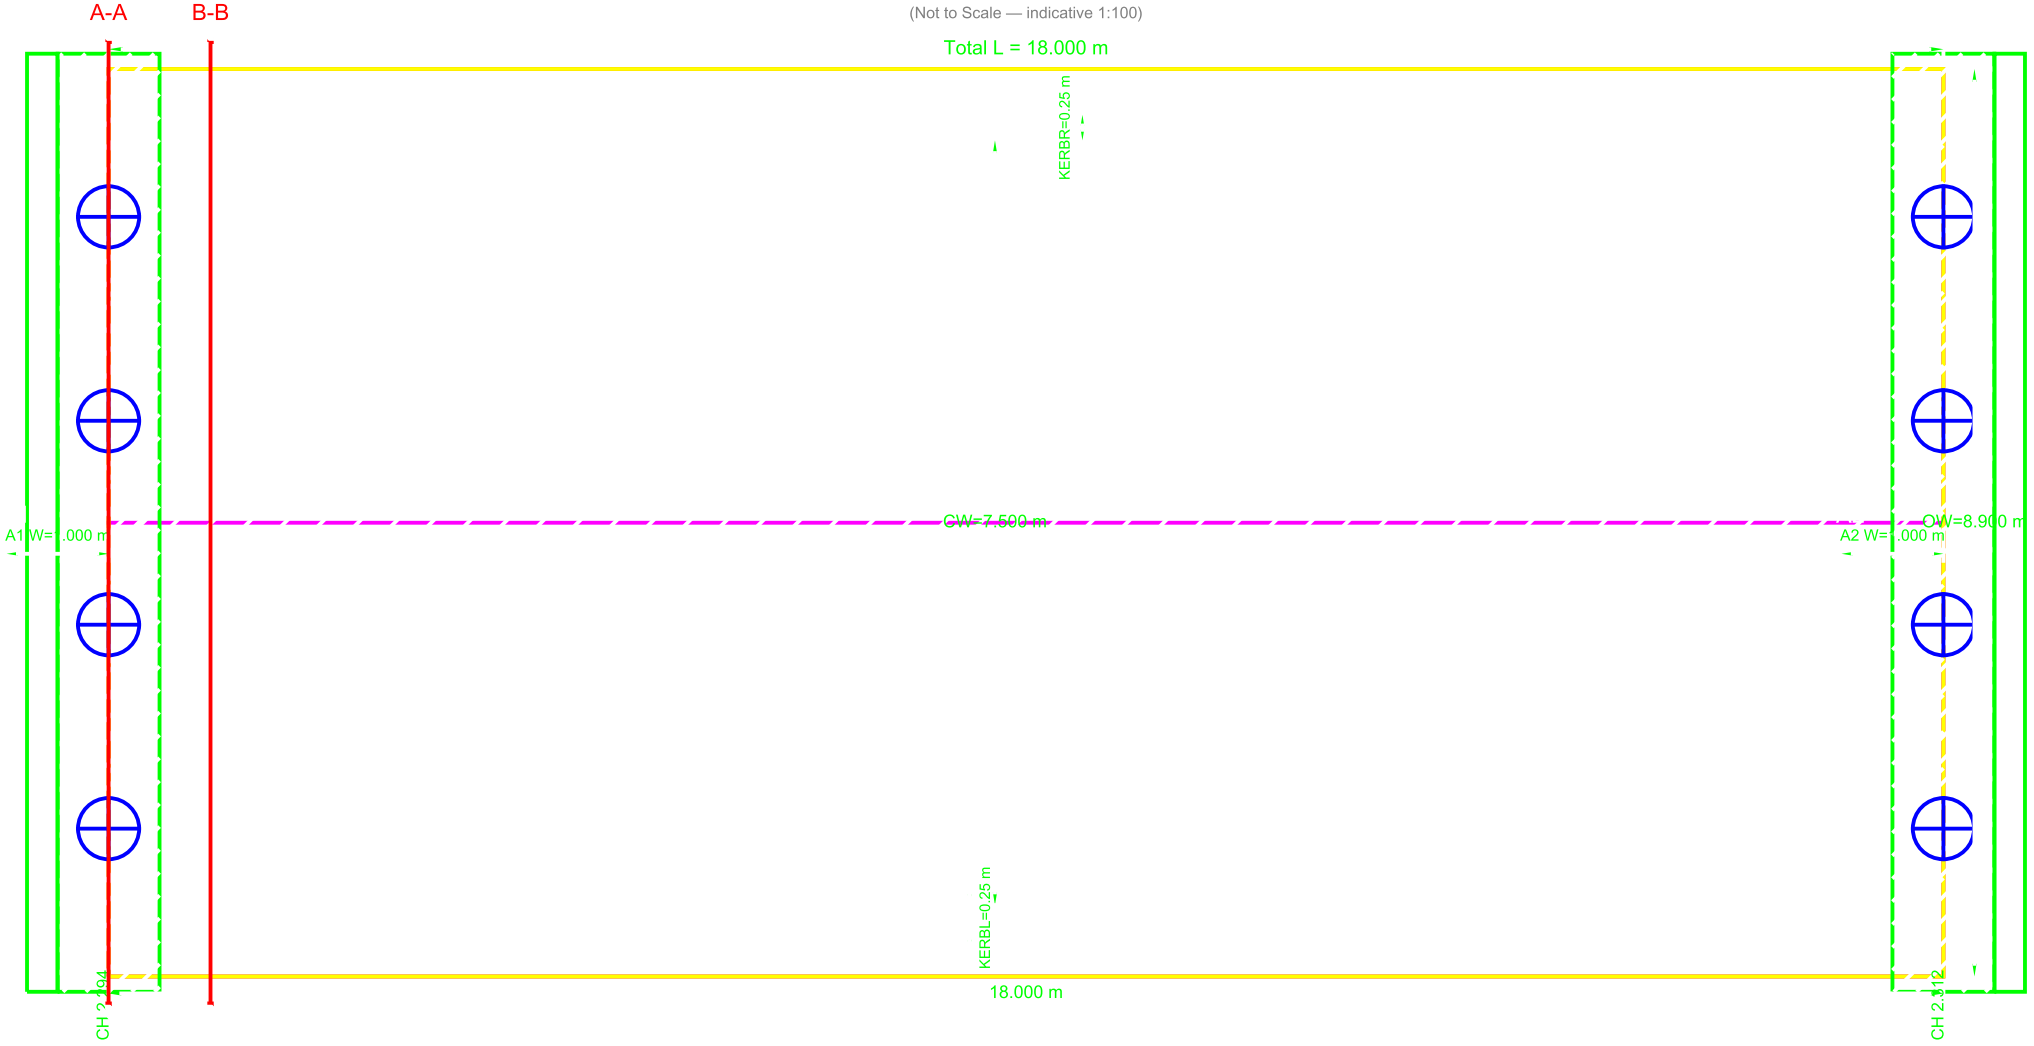

(Not to Scale — indicative 1:100)

A-A
B-B
Total L = 18.000 m
KERBR=0.25 m
A1 W= .000 m
CW=7.500 m
OW=8.900 m
A2 W= .000 m
KERBL=0.25 m
18.000 m
CH 2.294
CH 2.312

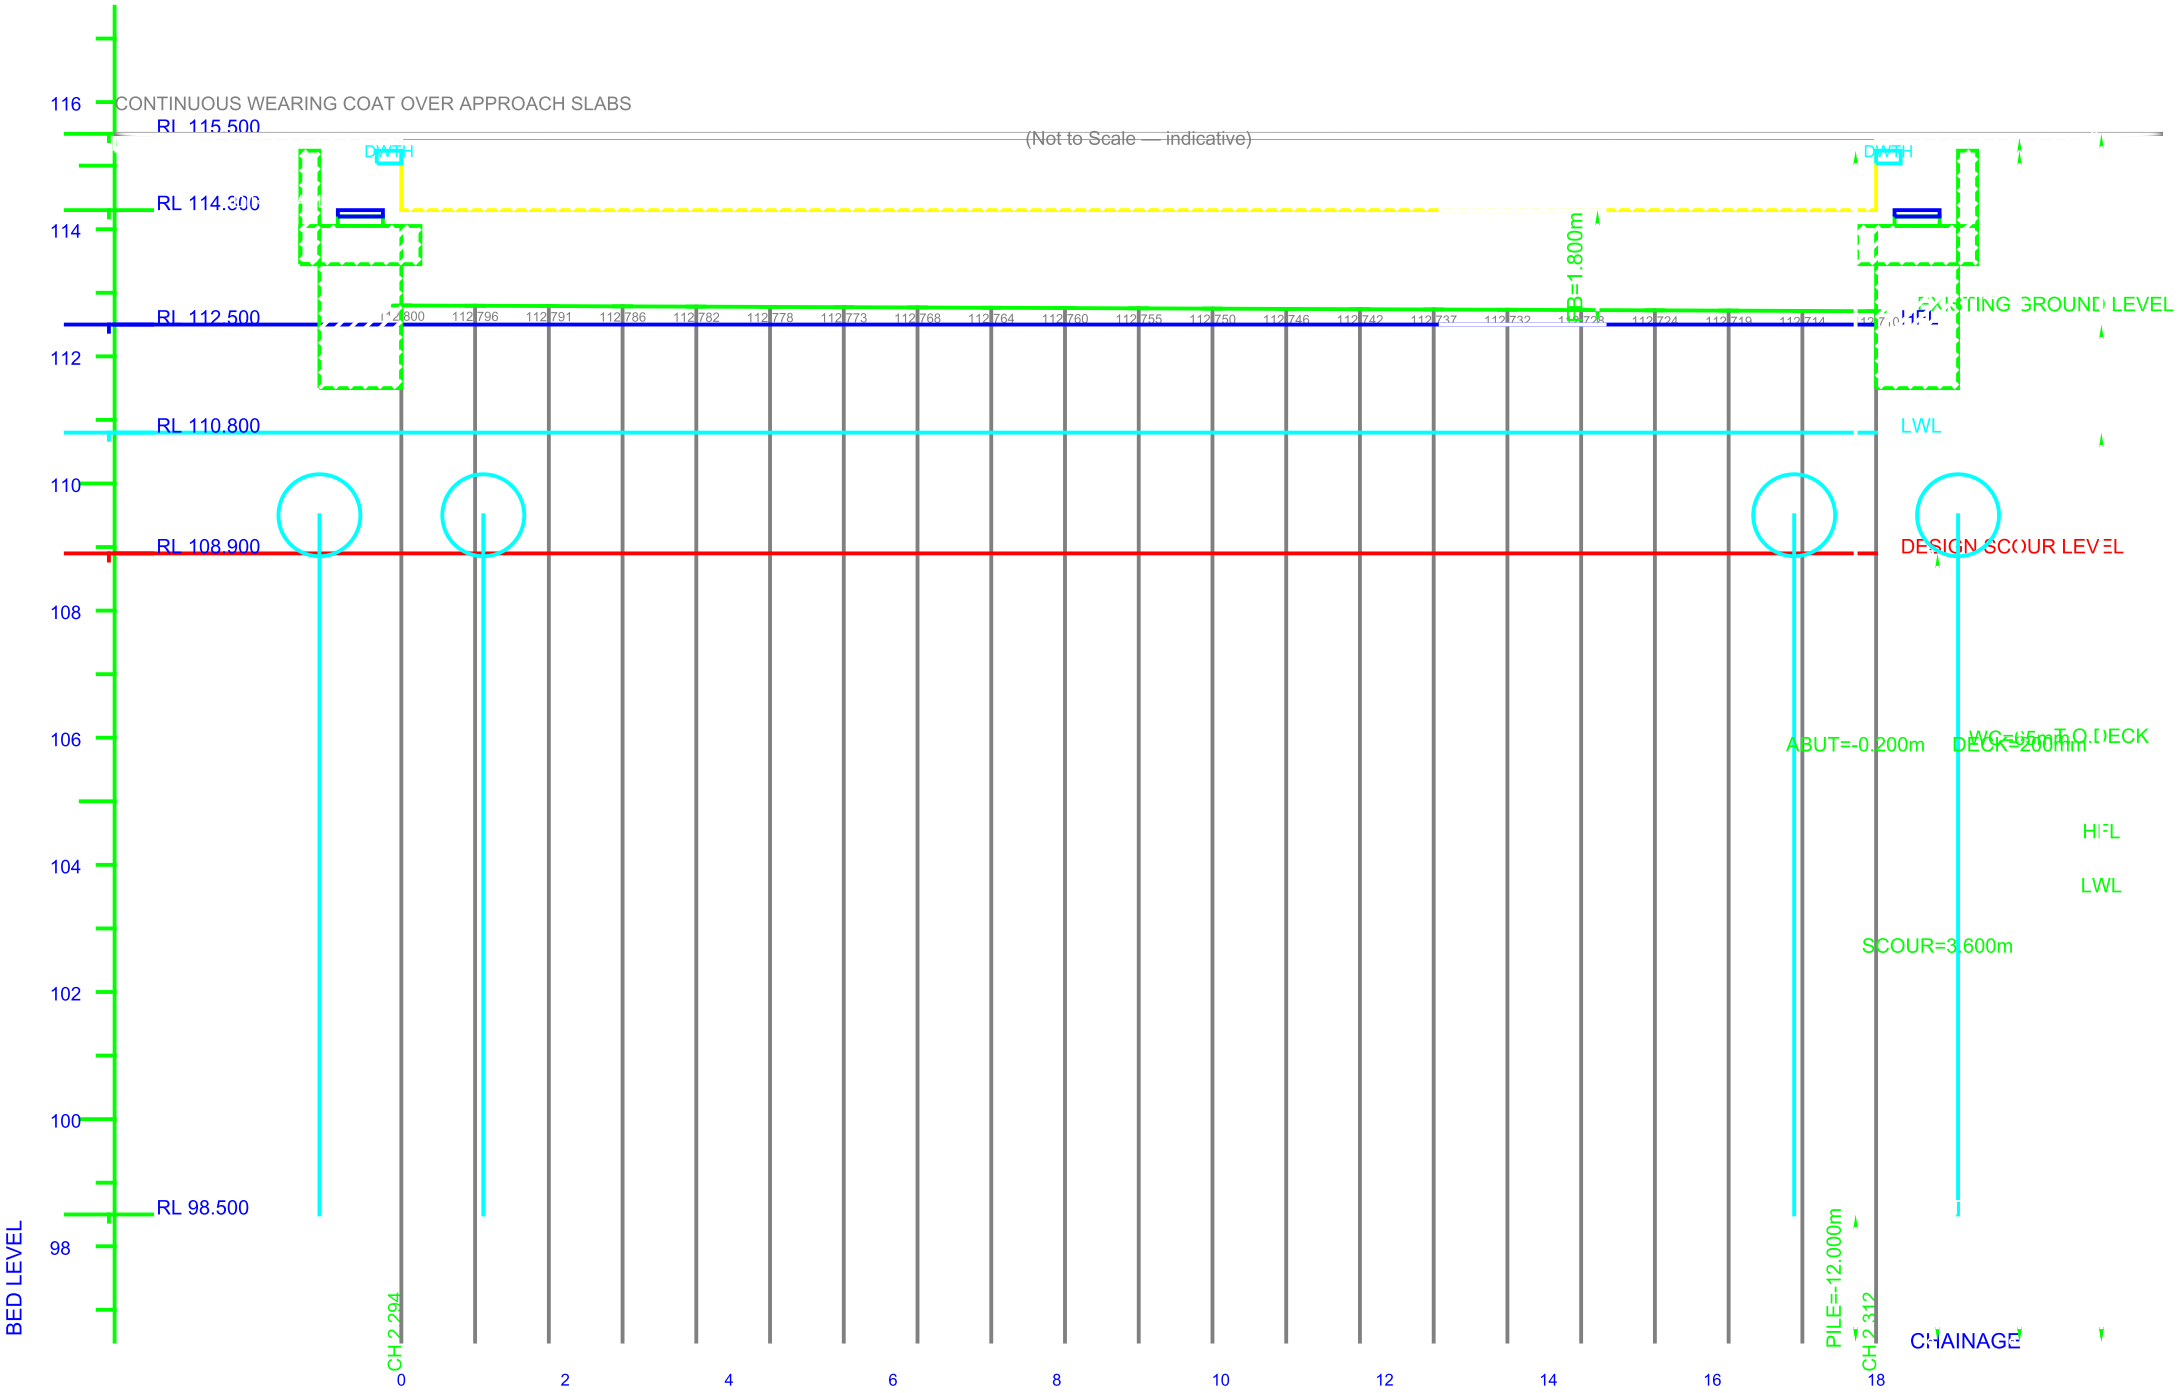
CONTINUOUS WEARING COAT OVER APPROACH SLABS
(Not to Scale — indicative)
116
RL 115.500
DWTH
DWTH
RL 114.300
114
RL 112.500
112
114.800
112.796
112.791
112.786
112.782
112.778
112.773
112.768
112.764
112.760
112.755
112.750
112.746
112.742
112.737
112.732
112.728
112.724
112.719
112.714
FB=1.800m
EXISTING GROUND LEVEL
HFL
RL 110.800
LWL
110
RL 108.900
DESIGN SCOUR LEVEL
108
106
ABUT=-0.200m
DECK=200mm
WC=65mm T.O.DECK
104
HFL
LWL
SCOUR=3.600m
102
100
RL 98.500
98
BED LEVEL
PILE=-12.000m
CH 2.294
CH 2.312
CHAINAGE
0
2
4
6
8
10
12
14
16
18

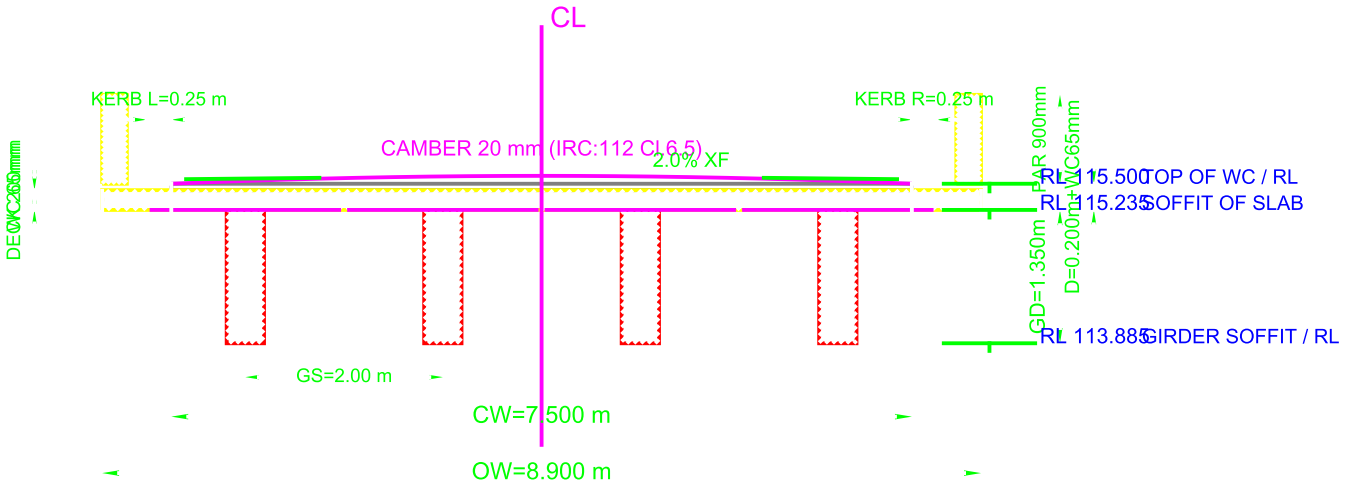
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl 6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=1.350m
RL 113.885 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=8.900 m


Cap L = 3.200 m
Cap W = 3.200 m

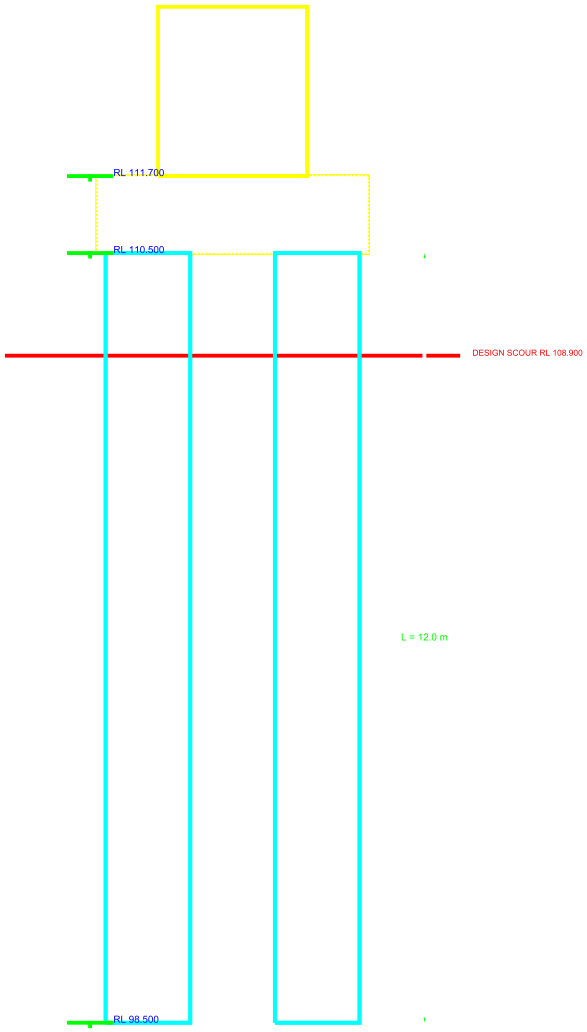
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.00m

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
DEPTH 80 mm
JOINT 160 mm

(Not to Scale — indicative)

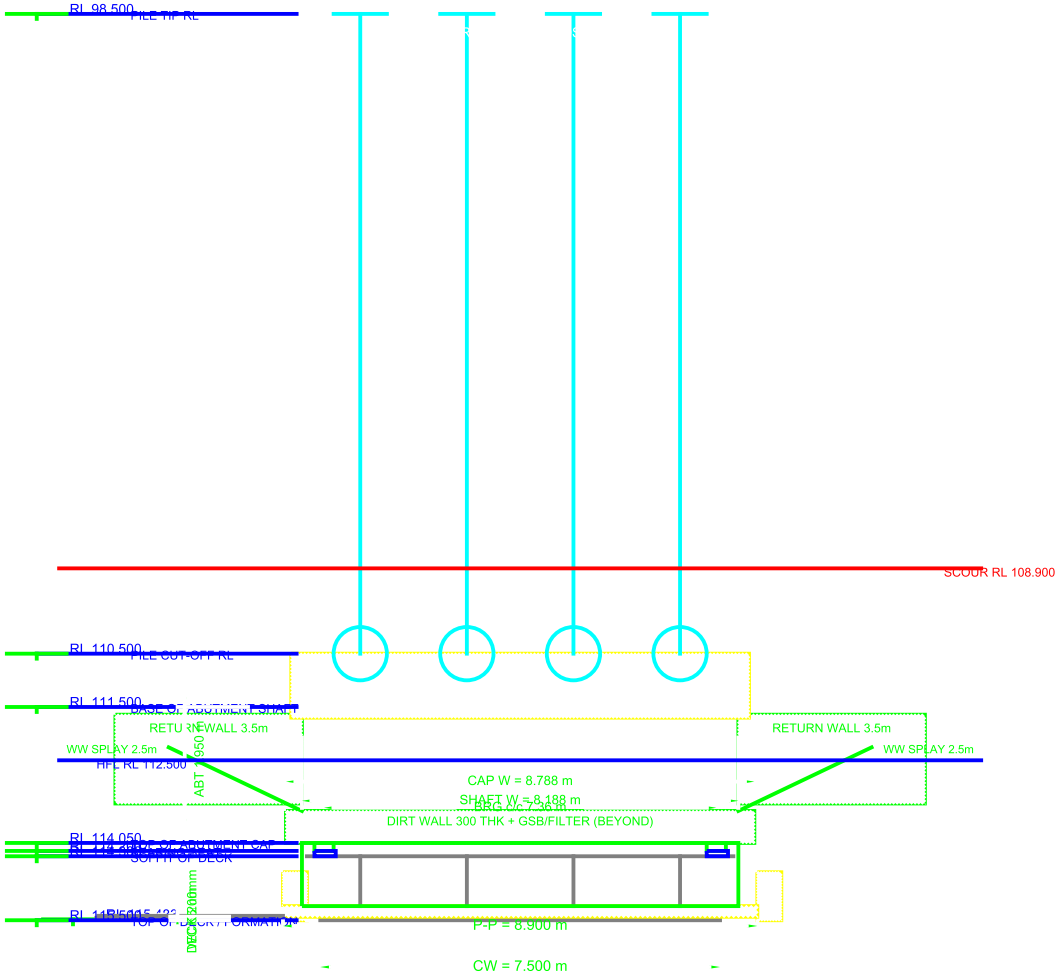
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950
CAP W = 8.788 m
SHAFT W = 8.188 m
BRG C/C 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
TOP OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.500
TOP OF DECK / FORMATION
DECK 200mm
P-P = 8.900 m
CW = 7.500 m

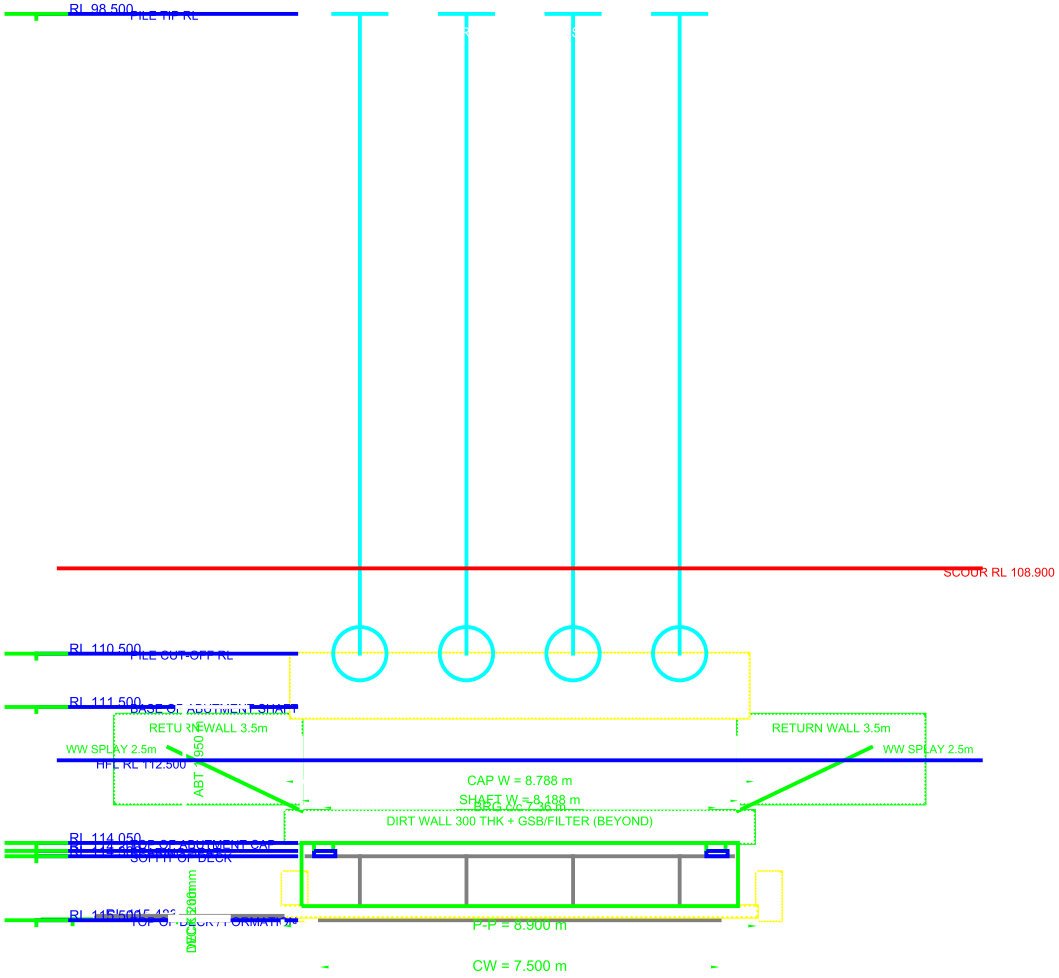
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 1950
CAP W = 8.788 m
SHAFT W = 8.188 m
BRG C/C 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
TOP OF ABUTMENT CAP
SOFFIT OF DECK
RL 115.500
TOP OF DECK / FORMATION
DECK 200mm
P-P = 8.900 m
CW = 7.500 m

QA-ABT-C	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-C	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-TI	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-T	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-W	Weep holes provided	4	1 per 3 m	OK
QA-ABT-C	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-S	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-B	Base pressure	159.91 kPa	<= 350.00 kPa	OK