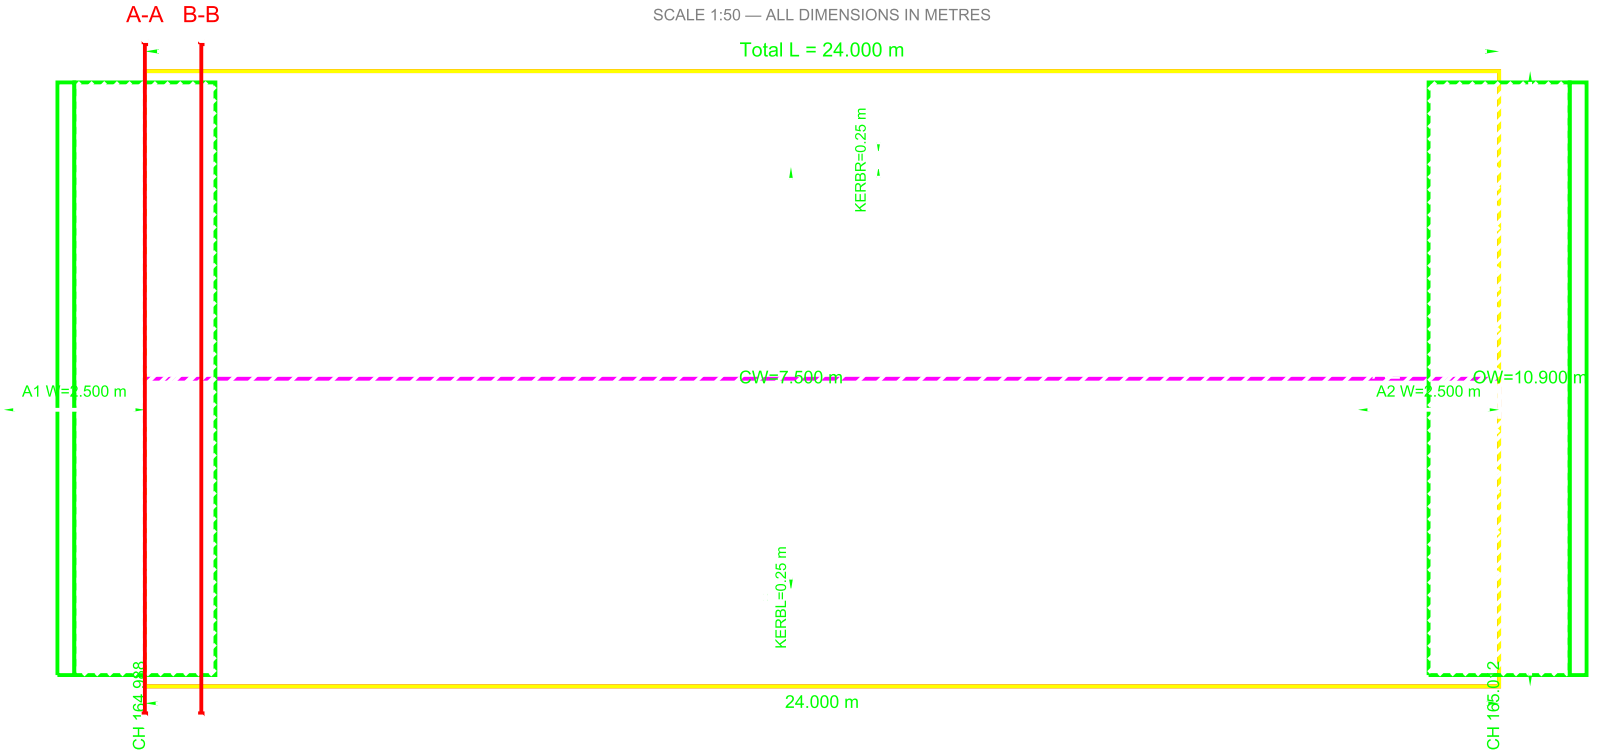

SCALE 1:50 — ALL DIMENSIONS IN METRES

A-A
B-B
Total L = 24.000 m
KERBR=0.25 m
A1 W=2.500 m
CW=7.500 m
A2 W=2.500 m
OW=10.900 m
KERBL=0.25 m
24.000 m
CH 164.988
CH 165.012

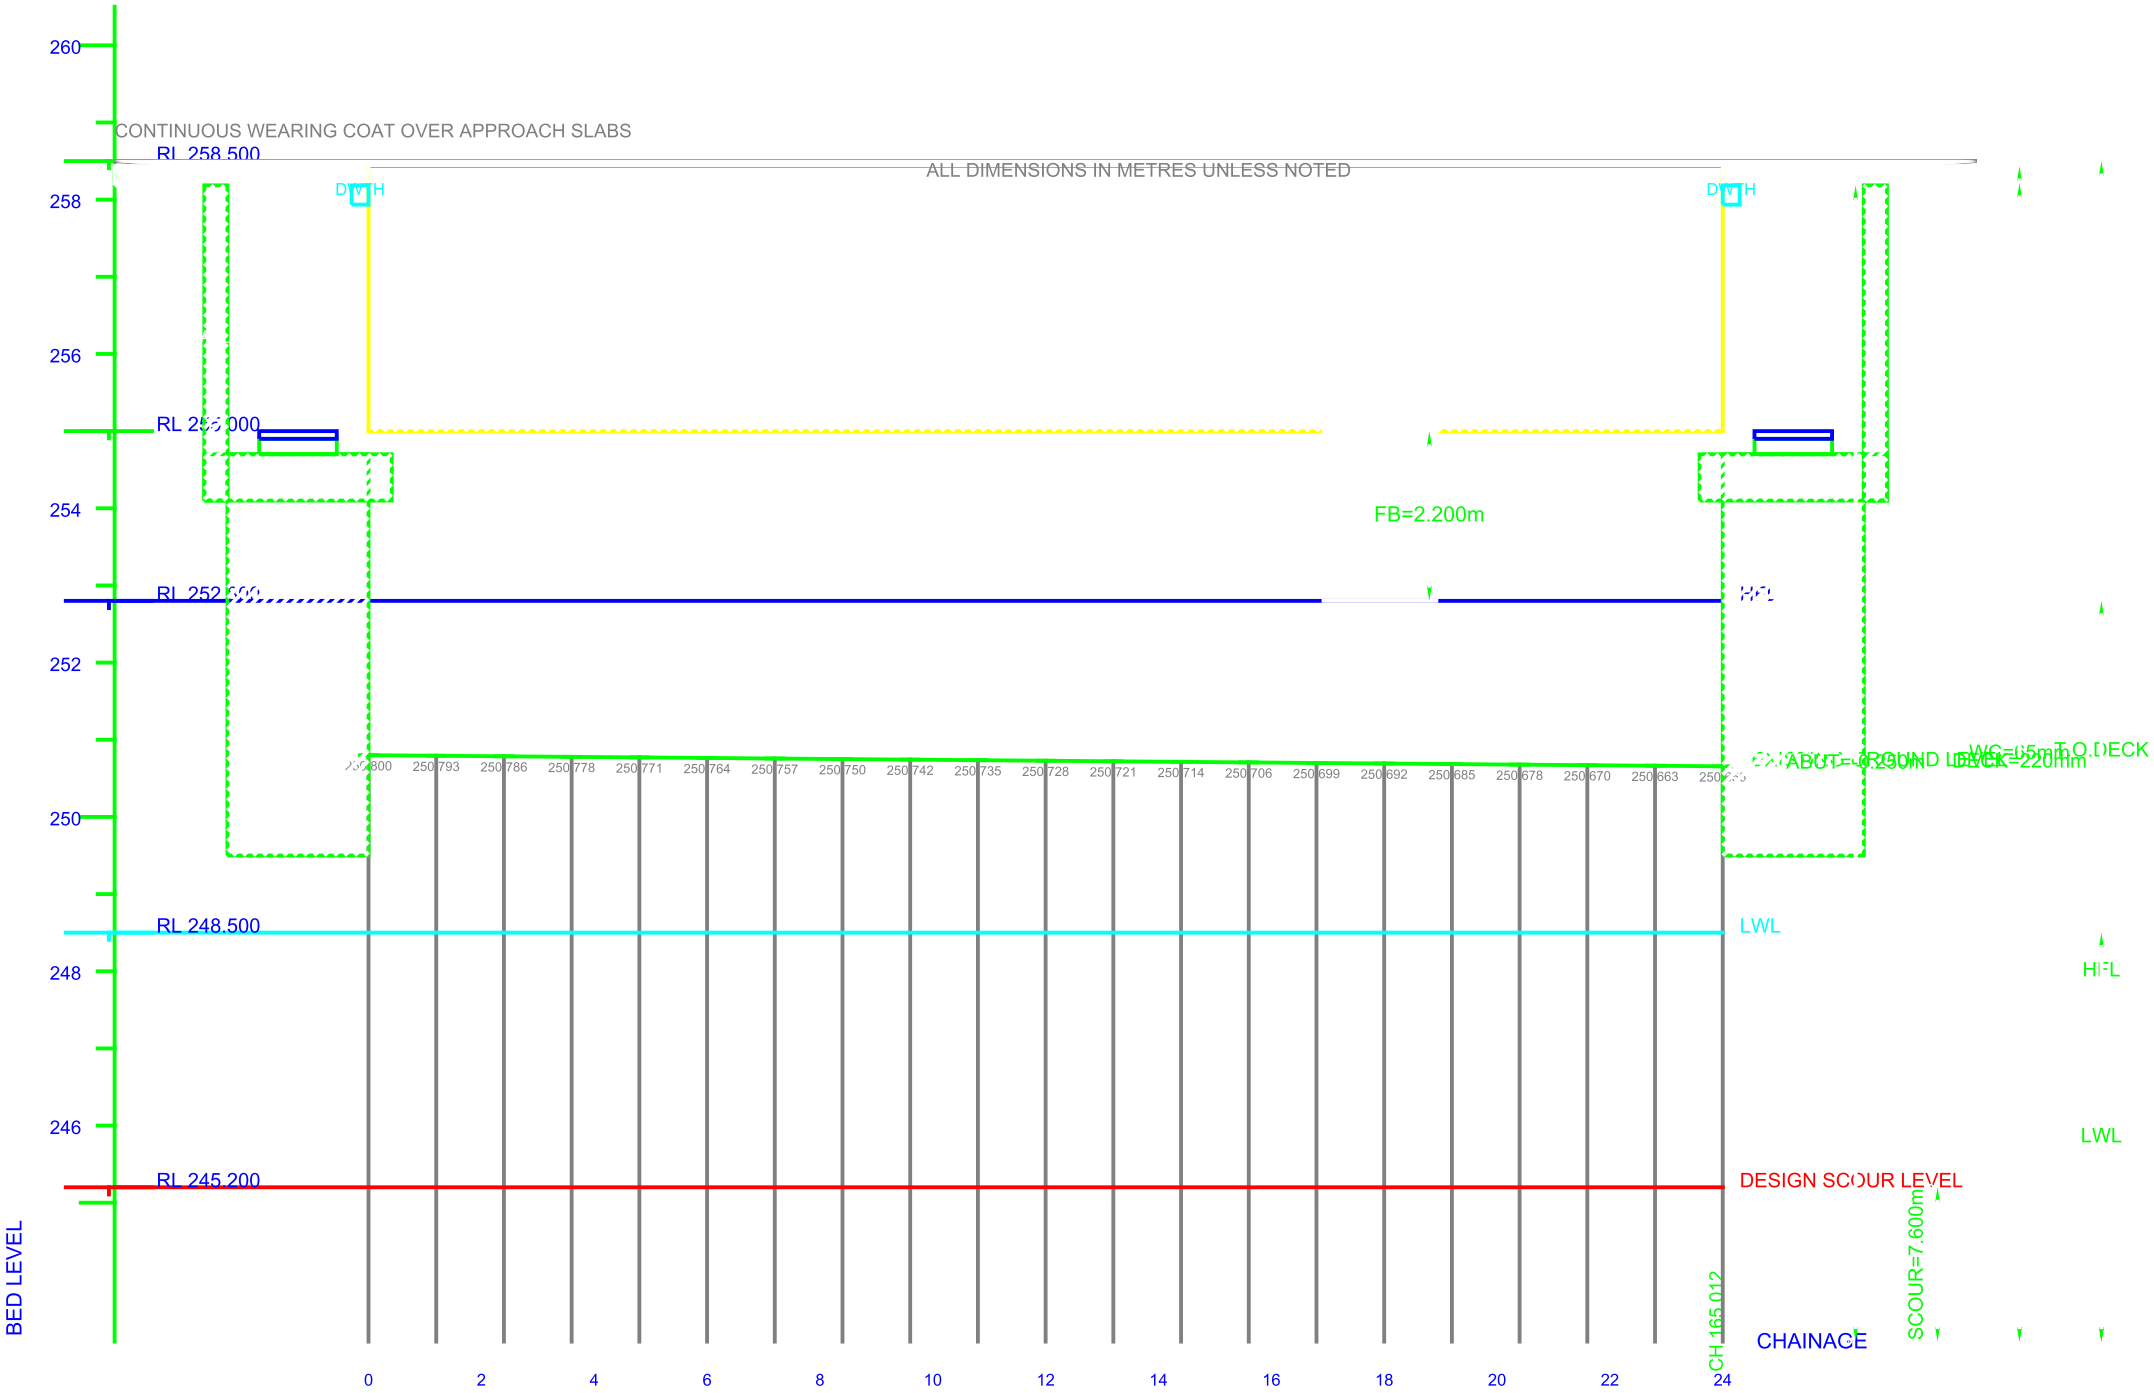
CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
RL 258.500
RL 255.000
RL 252.800
RL 248.500
RL 245.200
260
258
256
254
252
250
248
246
DEPTH
DEPTH
FB=2.200m
HFL
250.800
250.793
250.786
250.778
250.771
250.764
250.757
250.750
250.742
250.735
250.728
250.721
250.714
250.706
250.699
250.692
250.685
250.678
250.670
250.663
ABUT=-0.250m
GROUND LEVEL
DECK=220mm
WC=65mm T.O.DECK
LWL
HFL
LWL
DESIGN SCOUR LEVEL
SCOUR=7.600m
CH 165.012
CHAINAGE
BED LEVEL
0
2
4
6
8
10
12
14
16
18
20
22
24

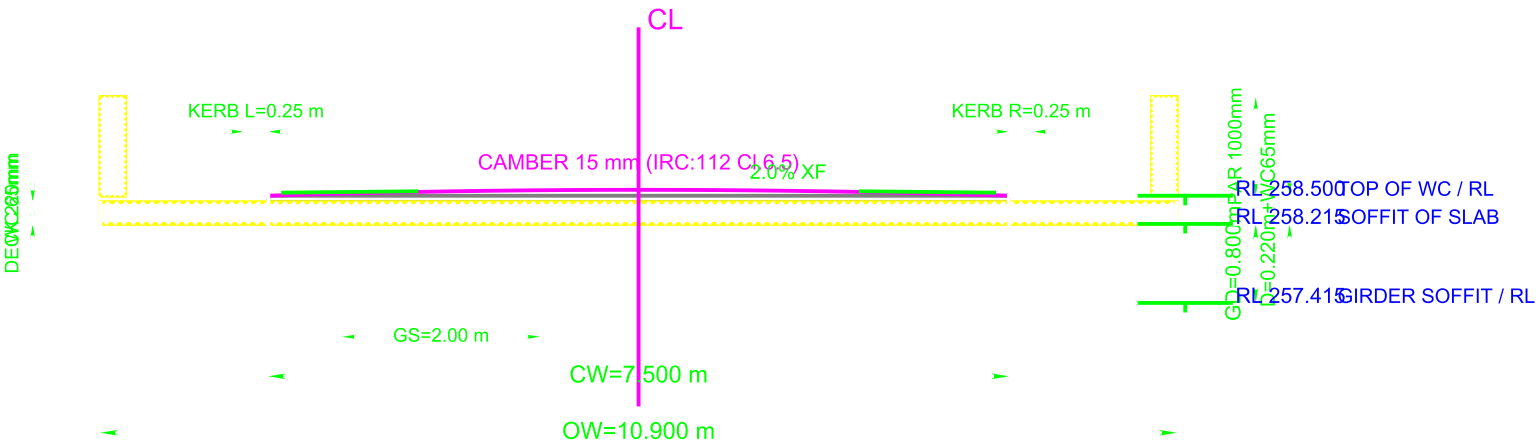
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 15 mm (IRC:112 Cl 6.5)
2.0% XF
DECK 220mm
WC 65mm
GD=0.800m PAR 1000mm
D=0.220m+WC65mm
RL 258.500
TOP OF WC / RL
RL 258.215
SOFFIT OF SLAB
RL 257.415
GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=10.900 m


ID = 1.65 m
OD = 3.00 m

DESIGN SCOUR RL 245.200


DW=0.30m
L=10.50m
WE=2.62m
CAP W=3.10m
SH=2.50m


DW=0.30m
L=10.50m
WE=2.62m
CAP W=3.10m
SH=2.50m


H=5.00m
HFL RL 252.800
Shaft=1.20m
Cap=1.50m


DW 250
H=5.50m
L=10.50m
WW=3.0m


Ø100 PVC WEEP HOLES @ 1.5m c/c
APP THK=0.25m
THK=2.50m


THK=1.20m
L=10.20m

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	3.48 m	>= 0.35 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	2.23	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.80	>= 1.40	OK
QA-ABT-BRG	Base pressure	409.89 kPa	<= 600.00 kPa	OK


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

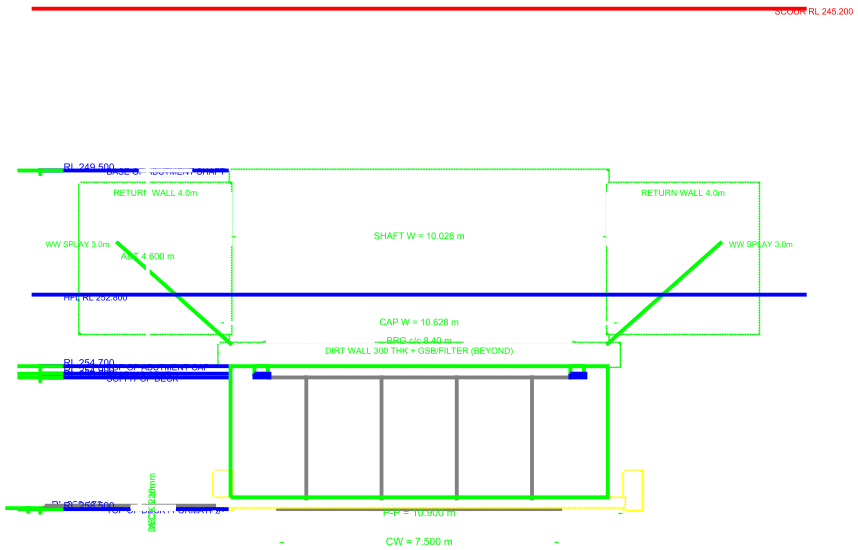
SCOUR RL 245.200
RL 249.500
BASE OF ABUTMENT SHAFT
RETURN WALL 4.0m
RETURN WALL 4.0m
SHAFT W = 10.028 m
WW SPLAY 3.0m
WW SPLAY 3.0m
ABT 4.600 m
HFL RL 252.800
CAP W = 10.628 m
BRG c/c 8.40 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 254.700
TOP OF ABUTMENT CAP
SOFFIT OF DECK
DECK 230mm
TOP OF DECK / FORMATION
P-P = 10.900 m
CW = 7.500 m

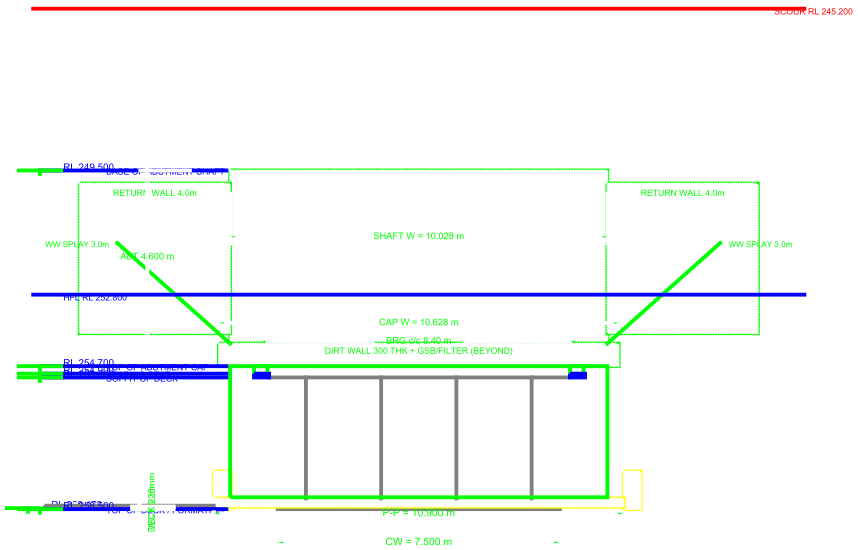
SCOUR RL 245.200
RL 249.500
BASE OF ABUTMENT SHAFT
RETURN WALL 4.0m
RETURN WALL 4.0m
SHAFT W = 10.028 m
WW SPLAY 3.0m
WW SPLAY 3.0m
ABT 4.600 m
HFL RL 252.800
CAP W = 10.628 m
BRG c/c 8.40 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 254.700
TOP OF ABUTMENT CAP
SOFFIT OF DECK
DECK 230mm
TOP OF DECK / FORMATION
P-P = 10.900 m
CW = 7.500 m

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	3.48 m	>= 0.35 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	2.23	>= 1.40	OK
QA-ABT-SL	Sliding FOS	1.80	>= 1.40	OK
QA-ABT-BRG	Base pressure	409.89 kPa	<= 600.00 kPa	OK