A-A

SCALE 1:50 — ALL DIMENSIONS IN METRES



SECTION B-B NOT APPLICABLE (NO PIER)

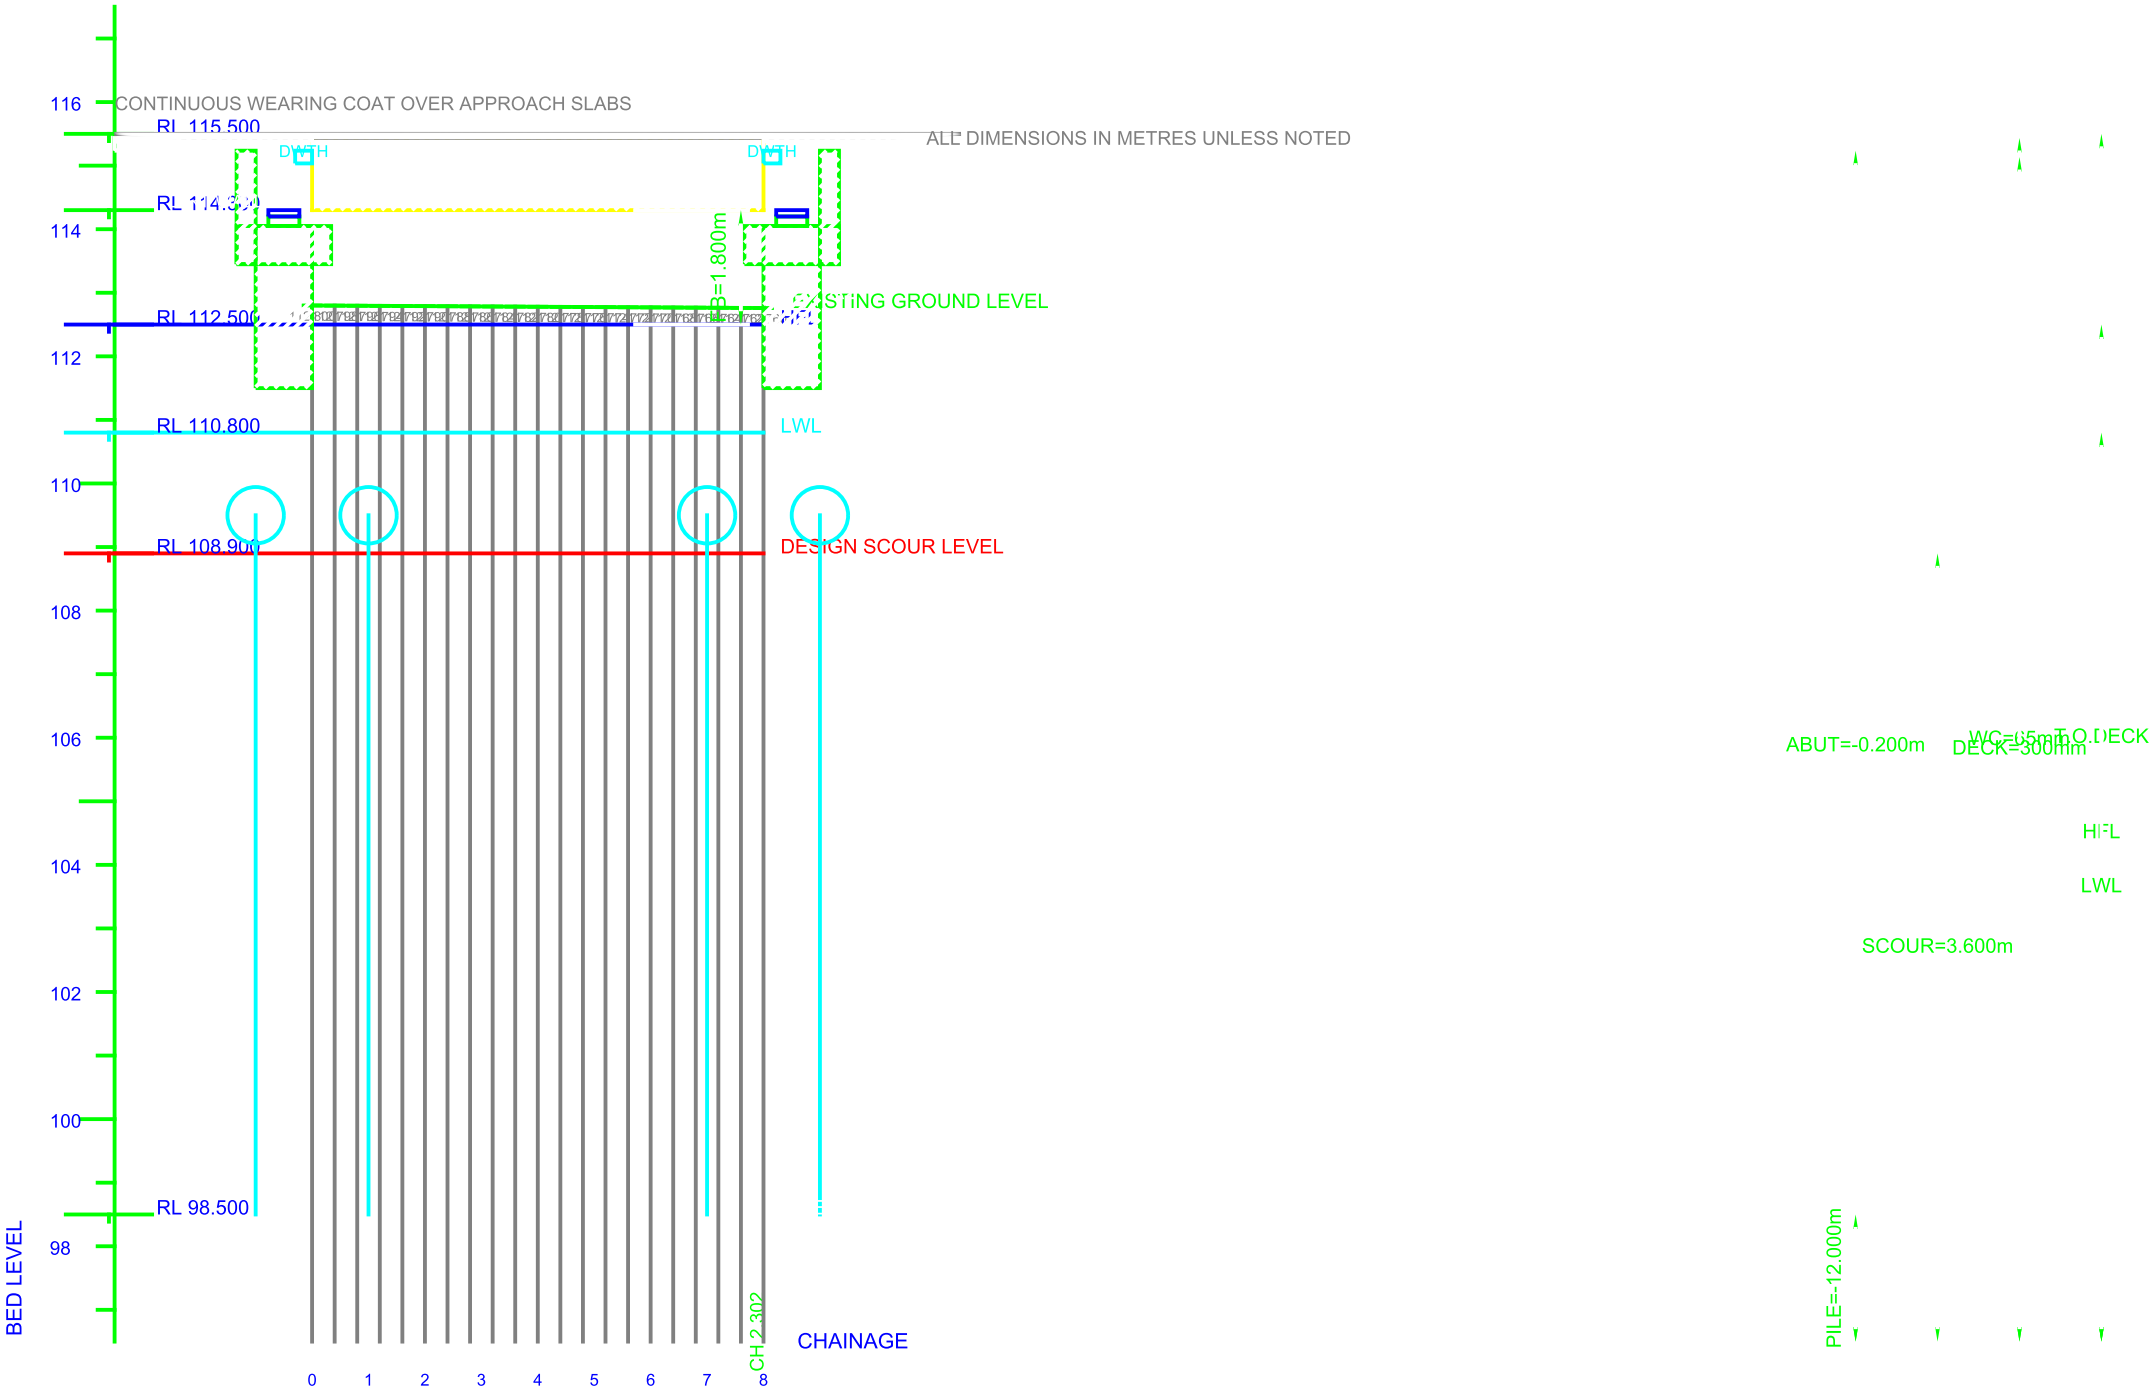CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
116
RL 115.500
DWTH
DWTH
RL 114.300
114
B=1.800m
EXISTING GROUND LEVEL
RL 112.500
HFL
112
RL 110.800
LWL
110
RL 108.900
DESIGN SCOUR LEVEL
108
106
104
102
100
RL 98.500
98
BED LEVEL
CH 2.302
CHAINAGE
0
1
2
3
4
5
6
7
8
ABUT=-0.200m
WC=65mm
T.O.DECK
DECK=300mm
HFL
LWL
SCOUR=3.600m
PILE=-12.000m

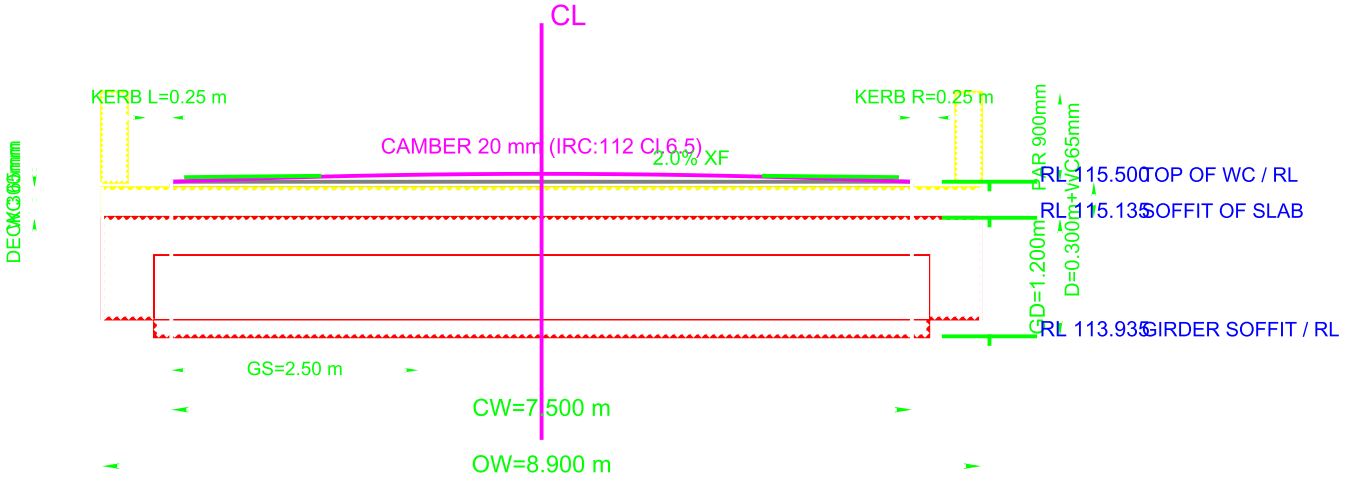
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
PAR 900mm
D=0.300m+WC65mm
DECK 300mm
WC 65mm
RL 115.500
TOP OF WC / RL
RL 115.135
SOFFIT OF SLAB
GD=1.200m
RL 113.935
GIRDER SOFFIT / RL
GS=2.50 m
CW=7.500 m
OW=8.900 m


Cap L = 3.200 m
Cap W = 3.200 m

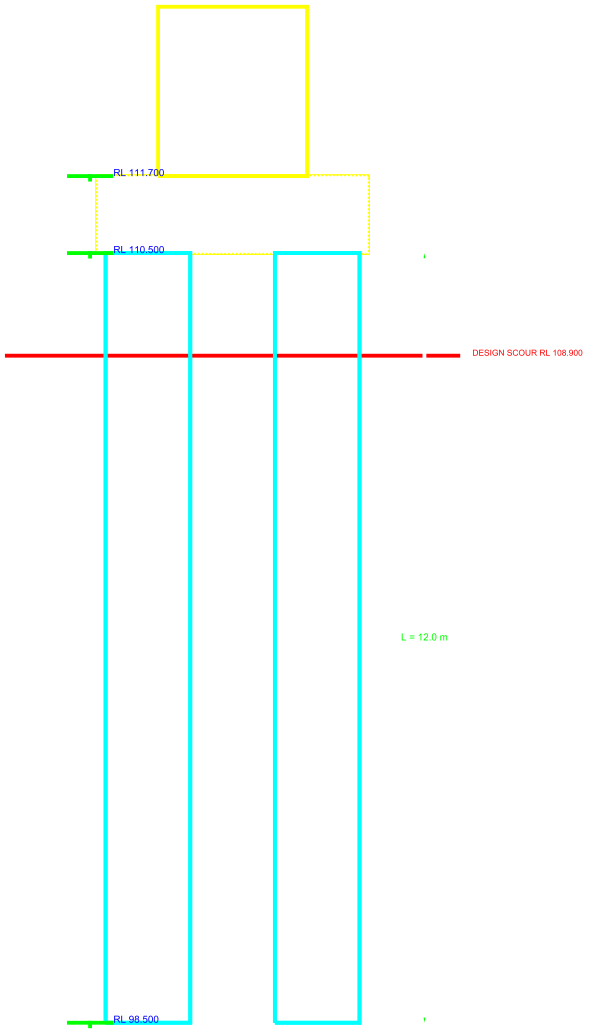
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m







QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK




60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▼ GAP ▼
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

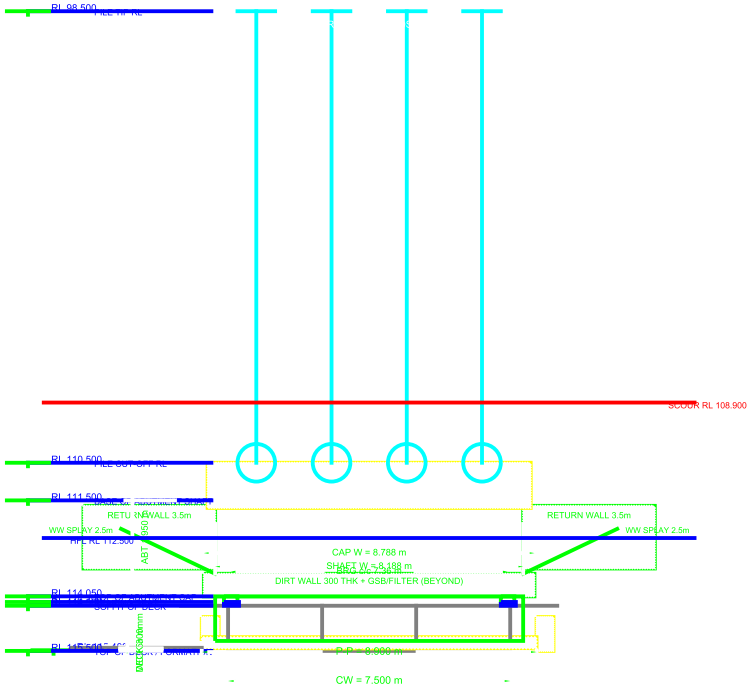

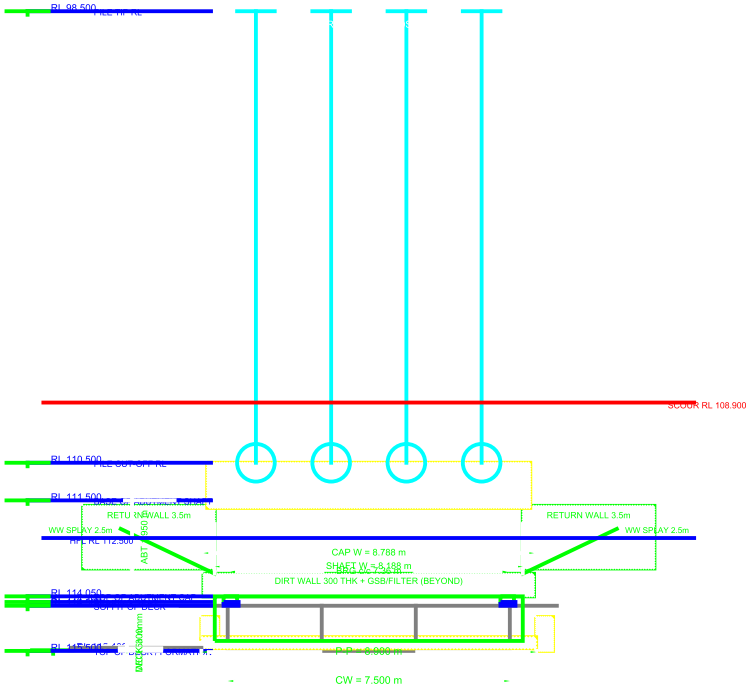

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK