SCALE 1:50 — ALL DIMENSIONS IN METRES



SECTION B-B NOT APPLICABLE (NO PIER)

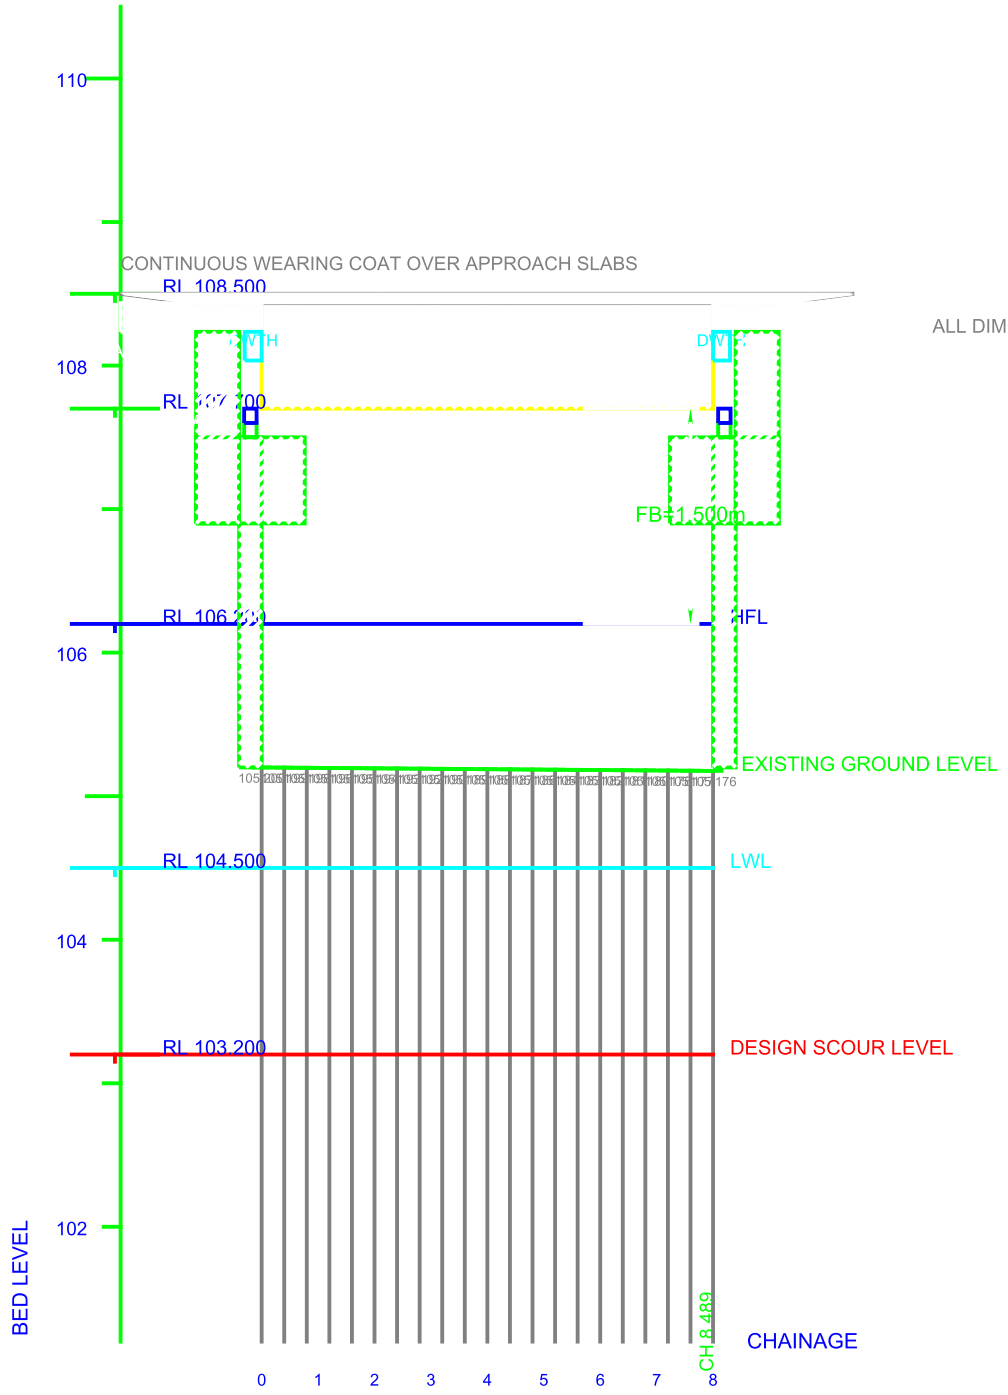

ALL DIMENSIONS IN METRES UNLESS NOTED

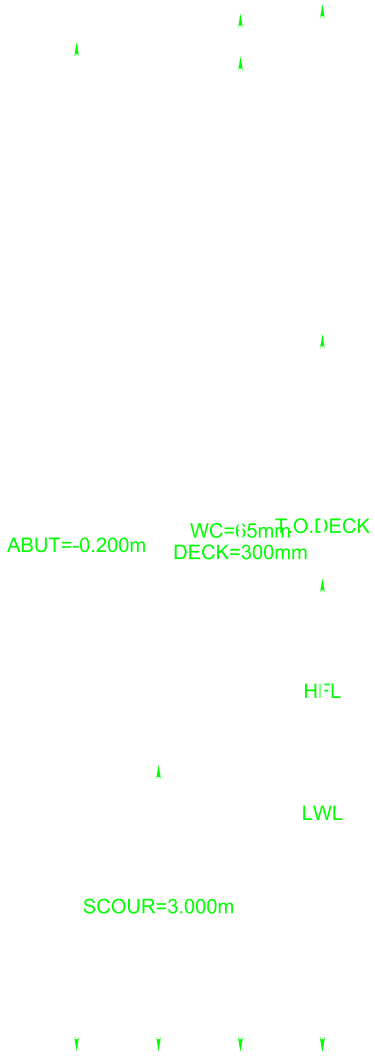

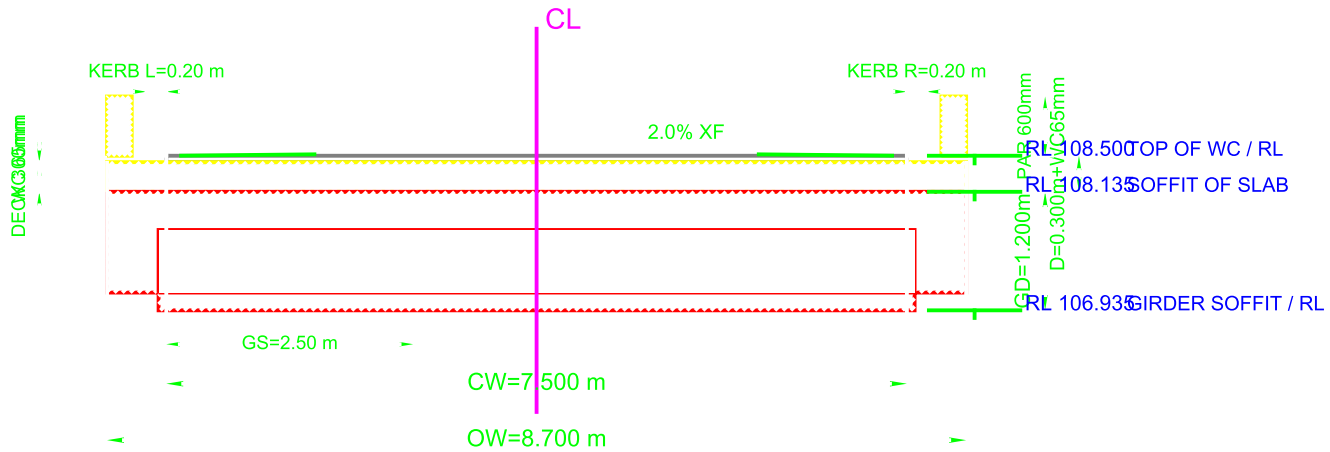
CL
KERB L=0.20 m
KERB R=0.20 m
2.0% XF
DECK 300mm
WC 65mm
PAR 600mm
D=0.300m+WC65mm
GD=1.200m
RL 108.500 TOP OF WC / RL
RL 108.135 SOFFIT OF SLAB
RL 106.935 GIRDER SOFFIT / RL
GS=2.50 m
CW=7.500 m
OW=8.700 m

DESIGN SCOUR RL 103.200









QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	0.73 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	3	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	0.30	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	0.68	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	720.94 kPa	<= 250.00 kPa	FAIL




60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
DEPTH 80 mm
JOINT 160 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED





QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	0.73 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	3	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	0.30	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	0.68	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	720.94 kPa	<= 250.00 kPa	FAIL