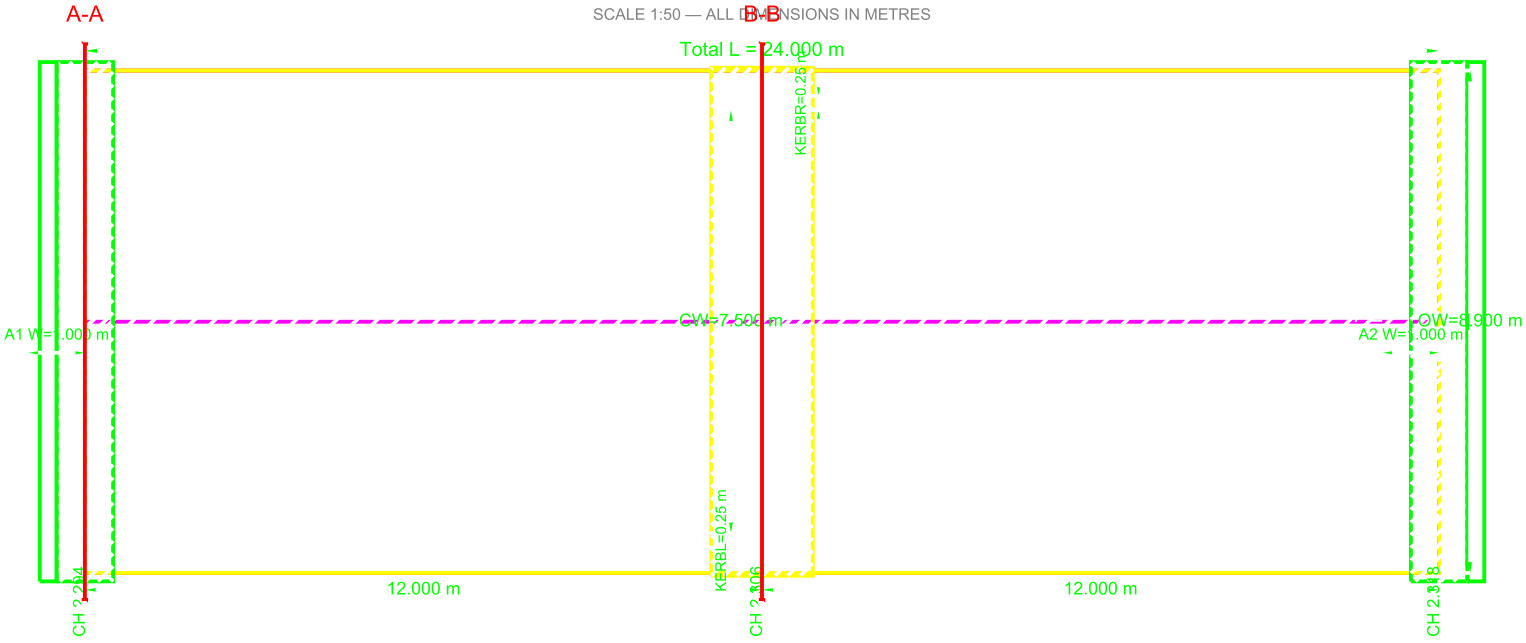
A-A
SCALE 1:50 — ALL DIMENSIONS IN METRES
B-B
Total L = 24.000 m
KERBR=0.25 m
A1 W=1.000 m
CW=7.500 m
OW=8.900 m
A2 W=1.000 m
KERBL=0.25 m
12.000 m
12.000 m
CH 2.294
CH 2.306
CH 2.318

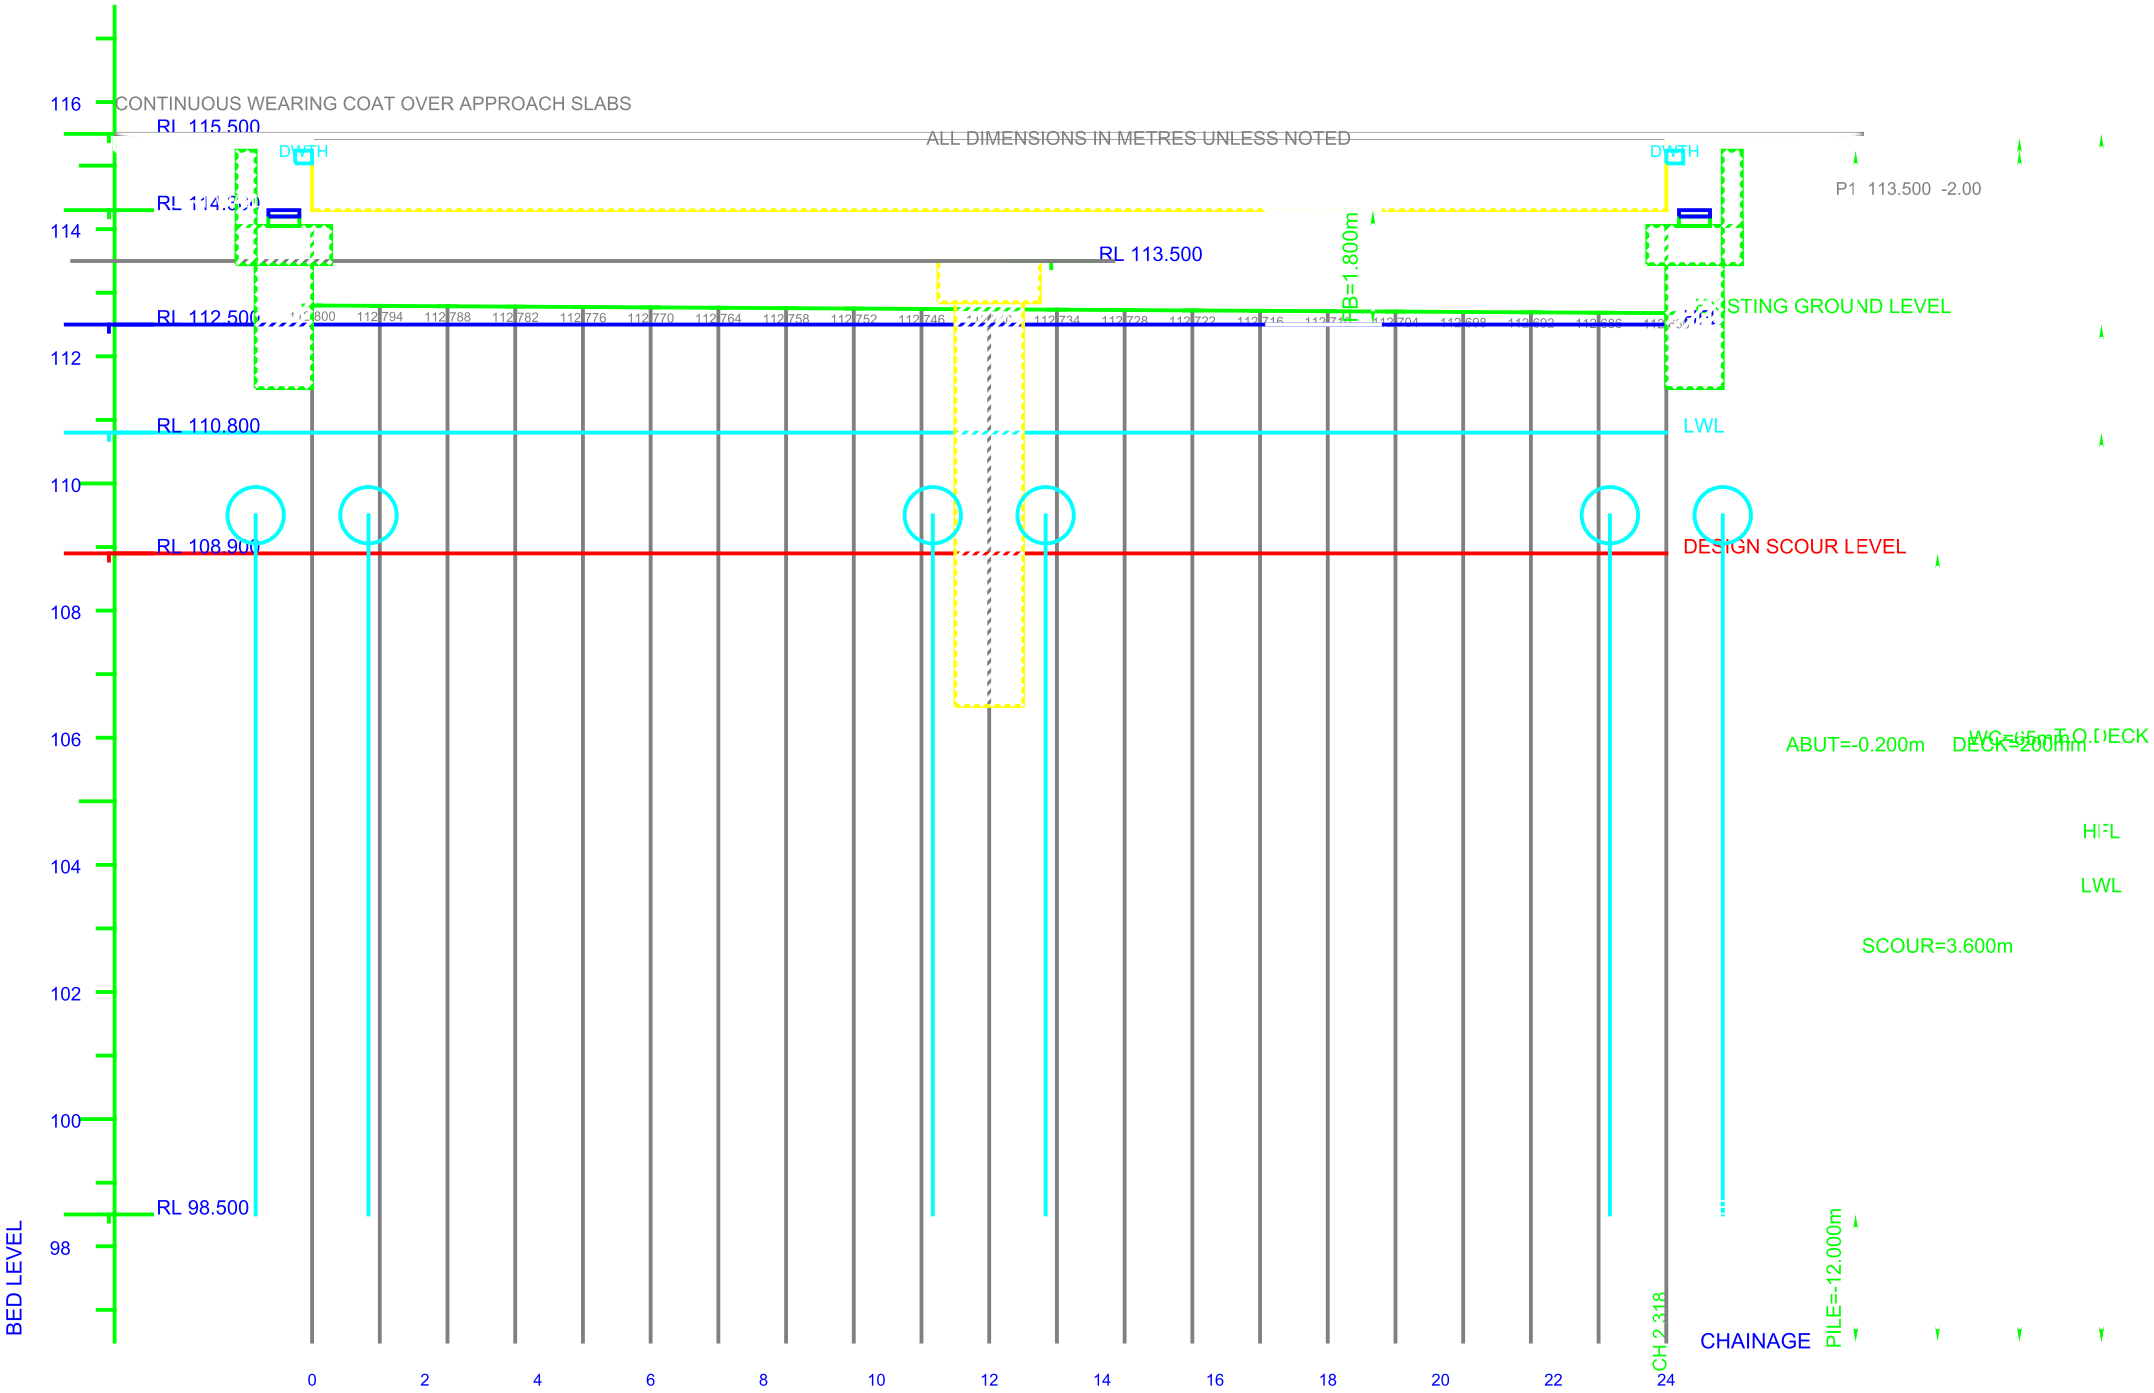
CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
RL 115.500
DWTH
DWTH
P1 113.500 -2.00
RL 114.300
RL 113.500
FB=1.800m
RL 112.500
EXISTING GROUND LEVEL
112.800
112.794
112.788
112.782
112.776
112.770
112.764
112.758
112.752
112.746
112.740
112.734
112.728
112.722
112.716
112.710
112.704
112.698
112.692
112.686
112.680
RL 110.800
LWL
RL 108.900
DESIGN SCOUR LEVEL
ABUT=-0.200m
DECK=200mm
WC=65mm T.O.DECK
HFL
LWL
SCOUR=3.600m
RL 98.500
PILE=-12.000m
CH 2.318
CHAINAGE
BED LEVEL
116
114
112
110
108
106
104
102
100
98
0
2
4
6
8
10
12
14
16
18
20
22
24

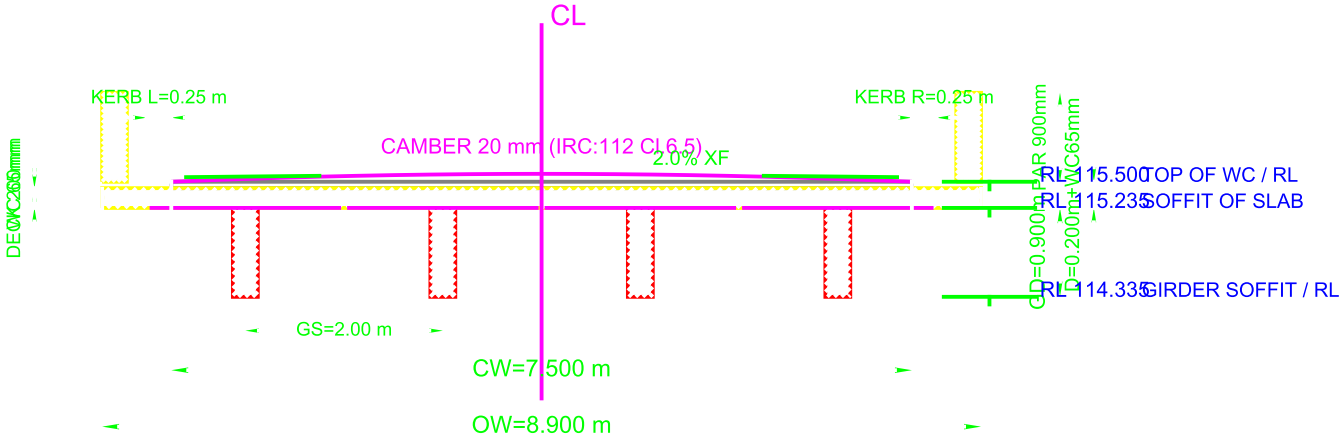
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 265mm
WC 65mm
GD=0.900m PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
RL 114.335 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=8.900 m


Cap L = 3.200 m
Cap W = 3.200 m

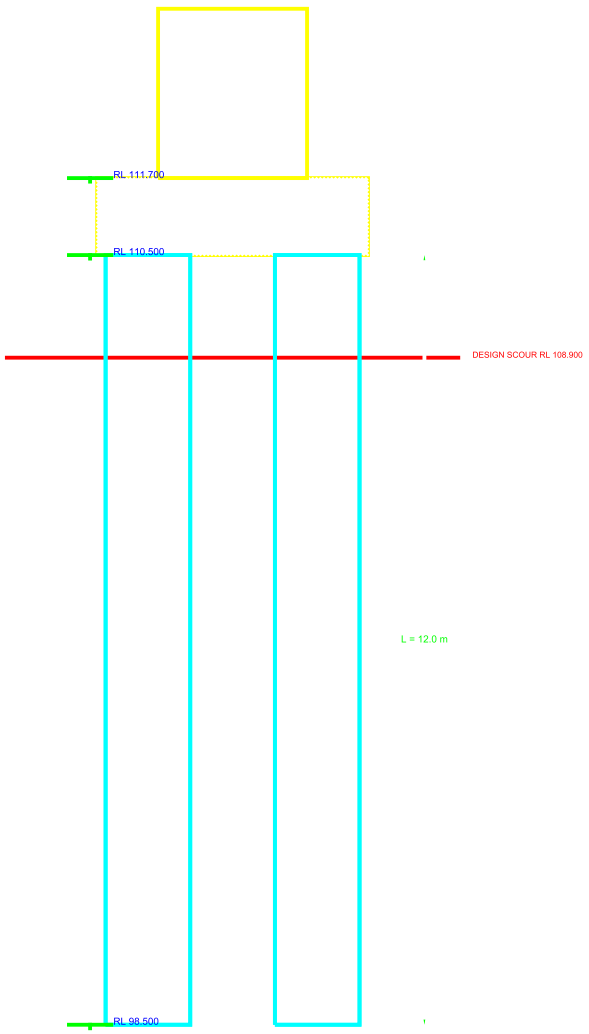
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m

L=9.60m
THK=1.20m

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Brg projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

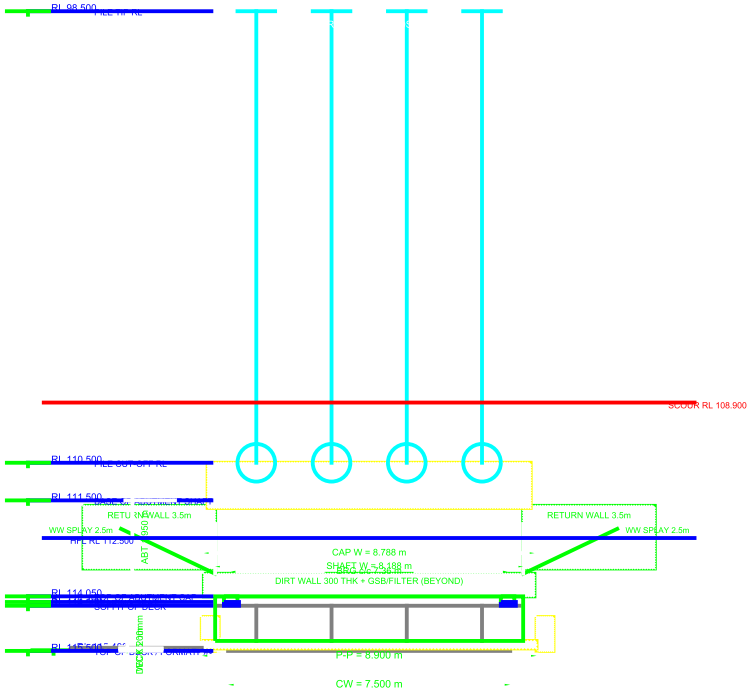
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 950
CAP W = 8.788 m
SHAFT W = 8.188 m
BRG c/c 7.30 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
SOFFIT OF DECK
DECK 200mm
RL 115.500
TOP OF DECK / FORMATION RL
P-P = 8.900 m
CW = 7.500 m


PILE TIP RL
RL 98.500
SCOUR RL 108.900
PILE CUT-OFF RL
RL 110.500
HFL RL 112.500
RL 114.150
CW = 7.500 m
TOP OF PIER CAP RL
RL 114.150
SOFFIT RL
RL 114.300
OW = 8.900 m
T.O.D. / FORMATION RL
RL 115.500

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK