SCALE 1:200 — ALL DIMENSIONS IN METRES

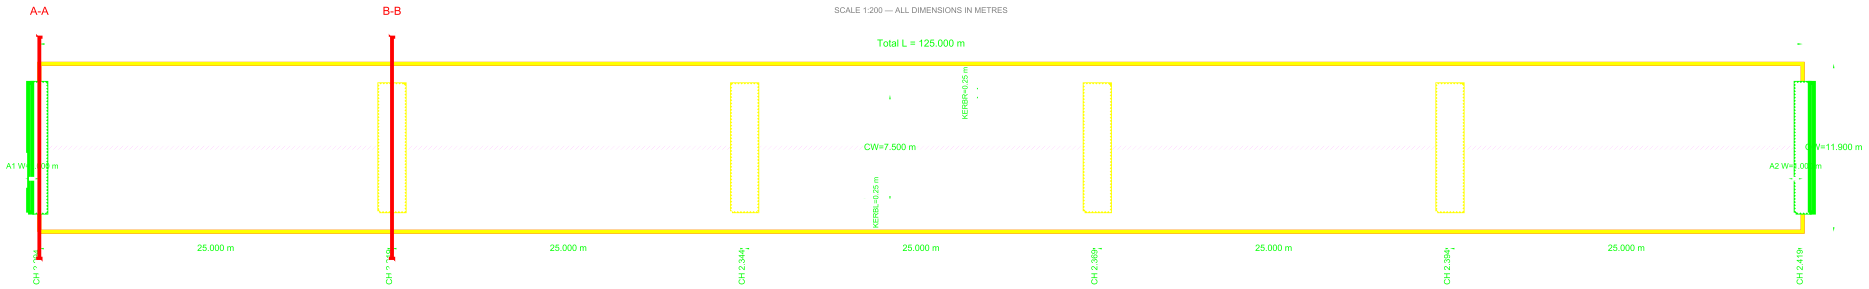
A-A
B-B
Total L = 125.000 m
KERBR=0.25 m
CW=7.500 m
KERBL=0.25 m
A1 W
A2 W=
CW=11.900 m
25.000 m
25.000 m
25.000 m
25.000 m
25.000 m
CH 2
CH 2
CH 2.344
CH 2.369
CH 2.394
CH 2.419

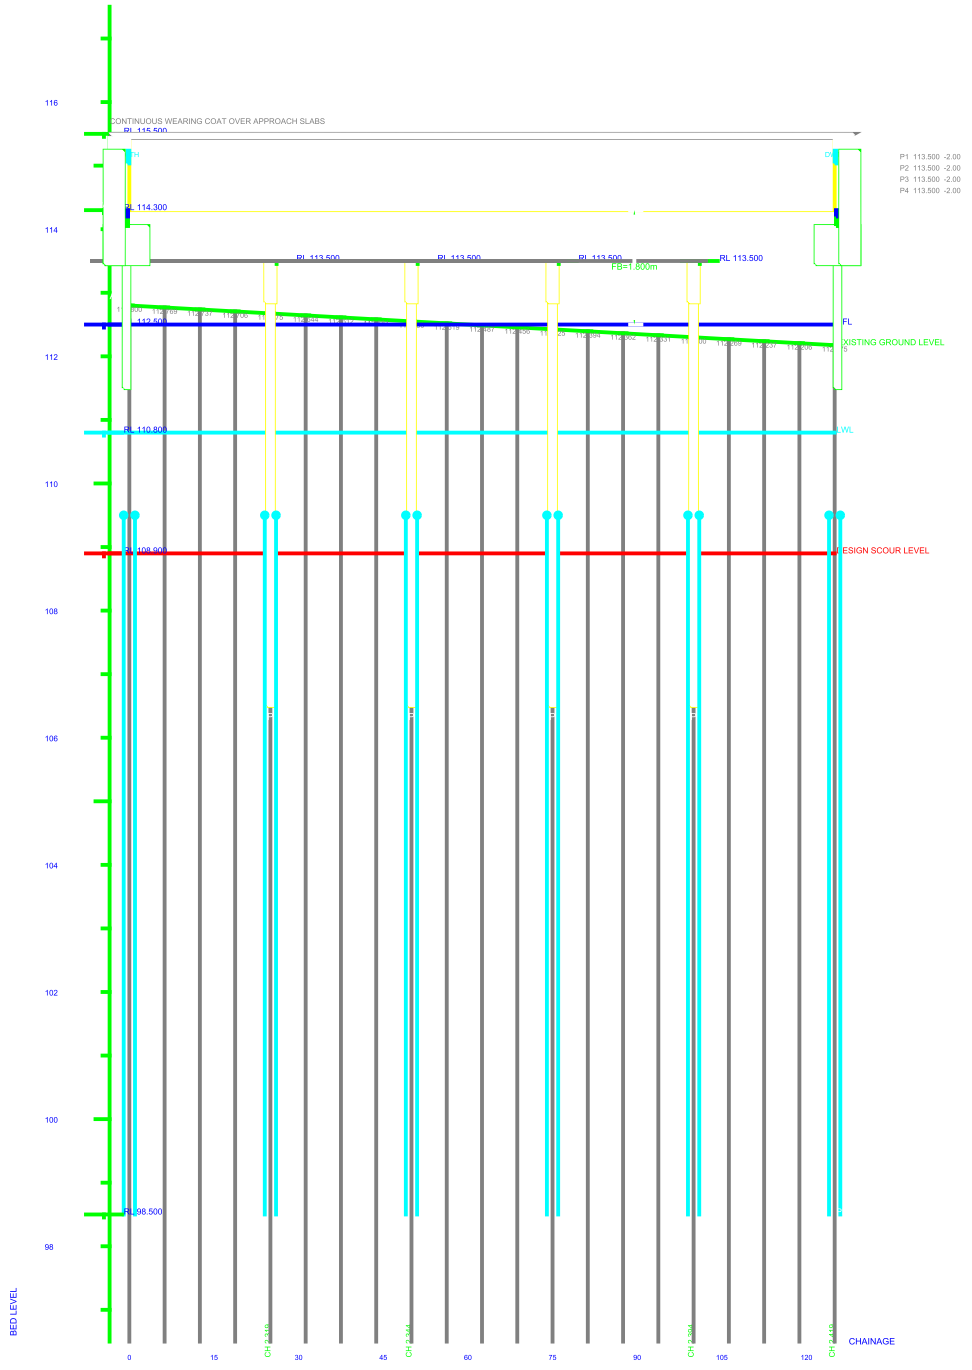
CONTINUOUS WEARING COAT OVER APPROACH SLABS
RL 115.500
RL 114.300
RL 113.500
RL 113.500
RL 113.500
RL 113.500
FB=1.800m
112.500
FL
EXISTING GROUND LEVEL
RL 110.800
LWL
RL 108.900
DESIGN SCOUR LEVEL
RL 98.500
P1 113.500 -2.00
P2 113.500 -2.00
P3 113.500 -2.00
P4 113.500 -2.00
116
114
112
110
108
106
104
102
100
98
BED LEVEL
CH 2.319
CH 2.344
CH 2.394
CH 2.419
CHAINAGE
0
15
30
45
60
75
90
105
120

ALL DIMENSIONS IN METRES UNLESS NOTED

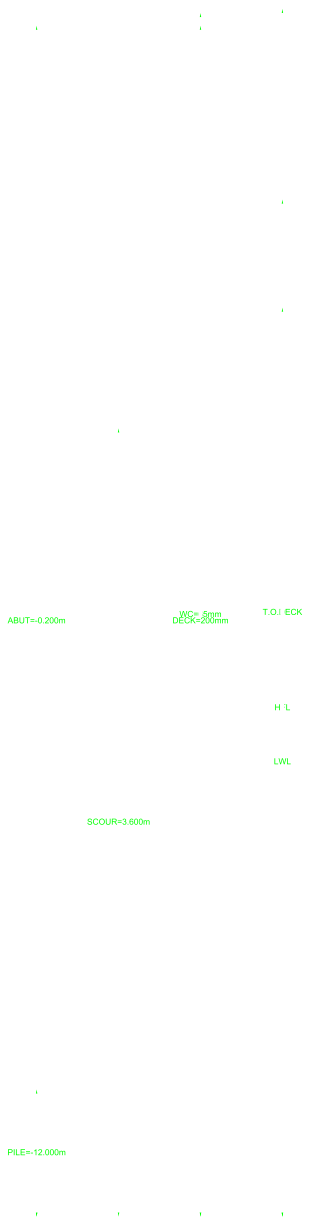
WC=75mm
T.O.DECK
ABUT=-0.200m
DECK=200mm
HFL
LWL
SCOUR=3.600m
PILE=-12.000m

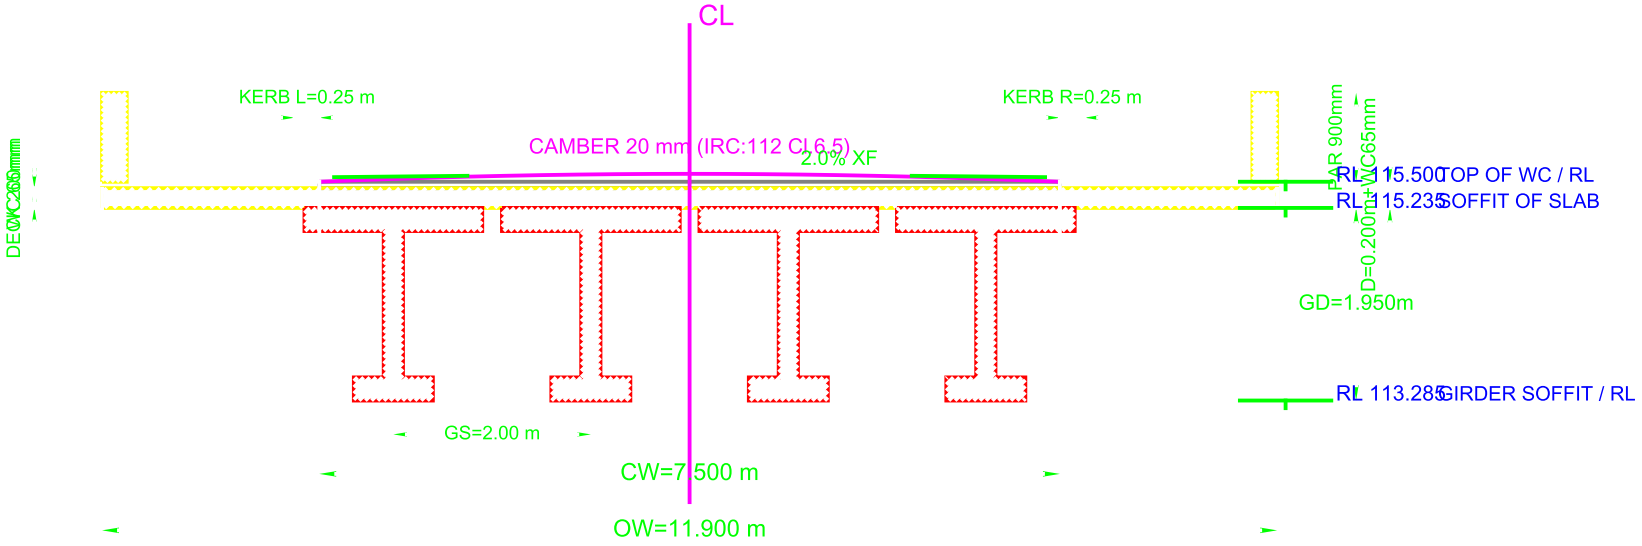
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
PAR 900mm
D=0.200m+WC65mm
DECK 200mm
WC 65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=1.950m
RL 113.285 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=11.900 m


Cap L = 3.200 m
Cap W = 3.200 m

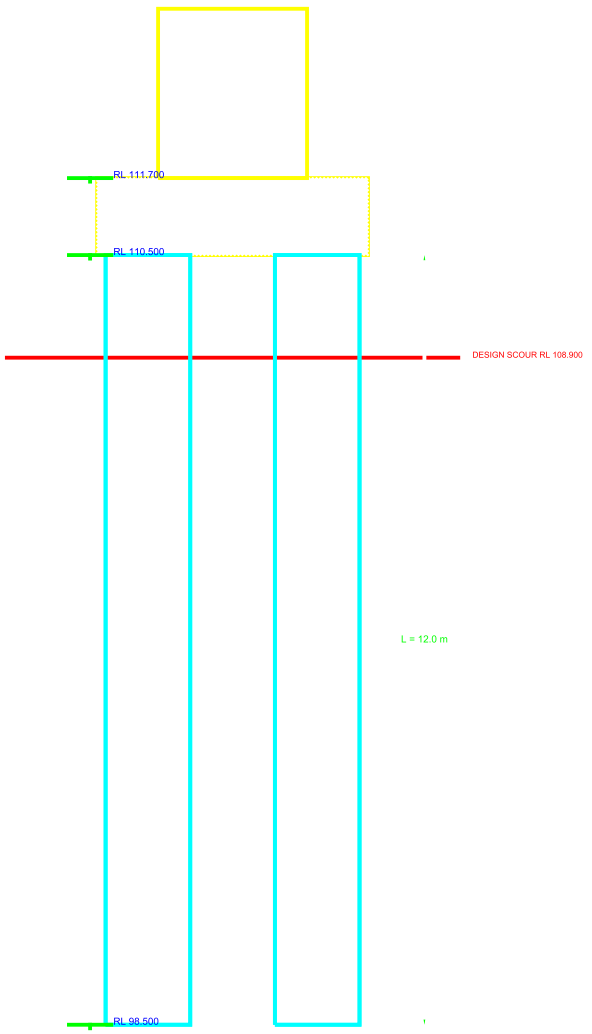
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.00m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.00m

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

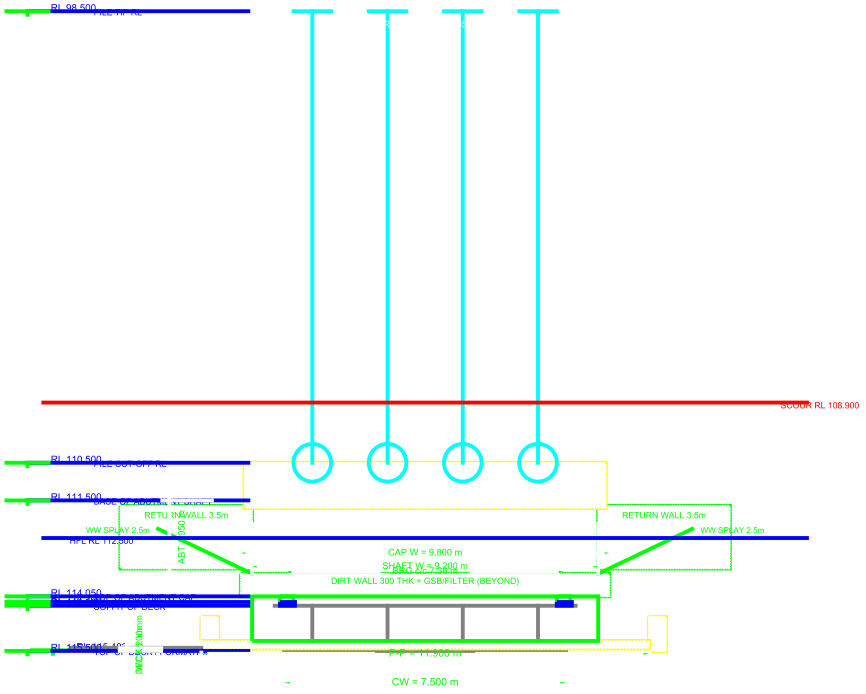
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
RETURN WALL 3.5m
RETURN WALL 3.5m
WW SPLAY 2.5m
WW SPLAY 2.5m
HFL RL 112.500
ABT 950
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.36 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
SOFFIT OF DECK
DECK 200mm
TOP OF DECK / FORMATION
P-P = 11.900 m
CW = 7.500 m


PILE TIP RL
RL 98.500
SCOUR RL 108.900
PILE CUT-OFF RL
RL 110.500
HFL RL 112.500
RL 114.150
CW = 7.500 m
SOFFIT RL
RL 114.150
RL 114.300
OW = 11.900 m
T.O.D. / FORMATION RL
RL 115.500

QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK