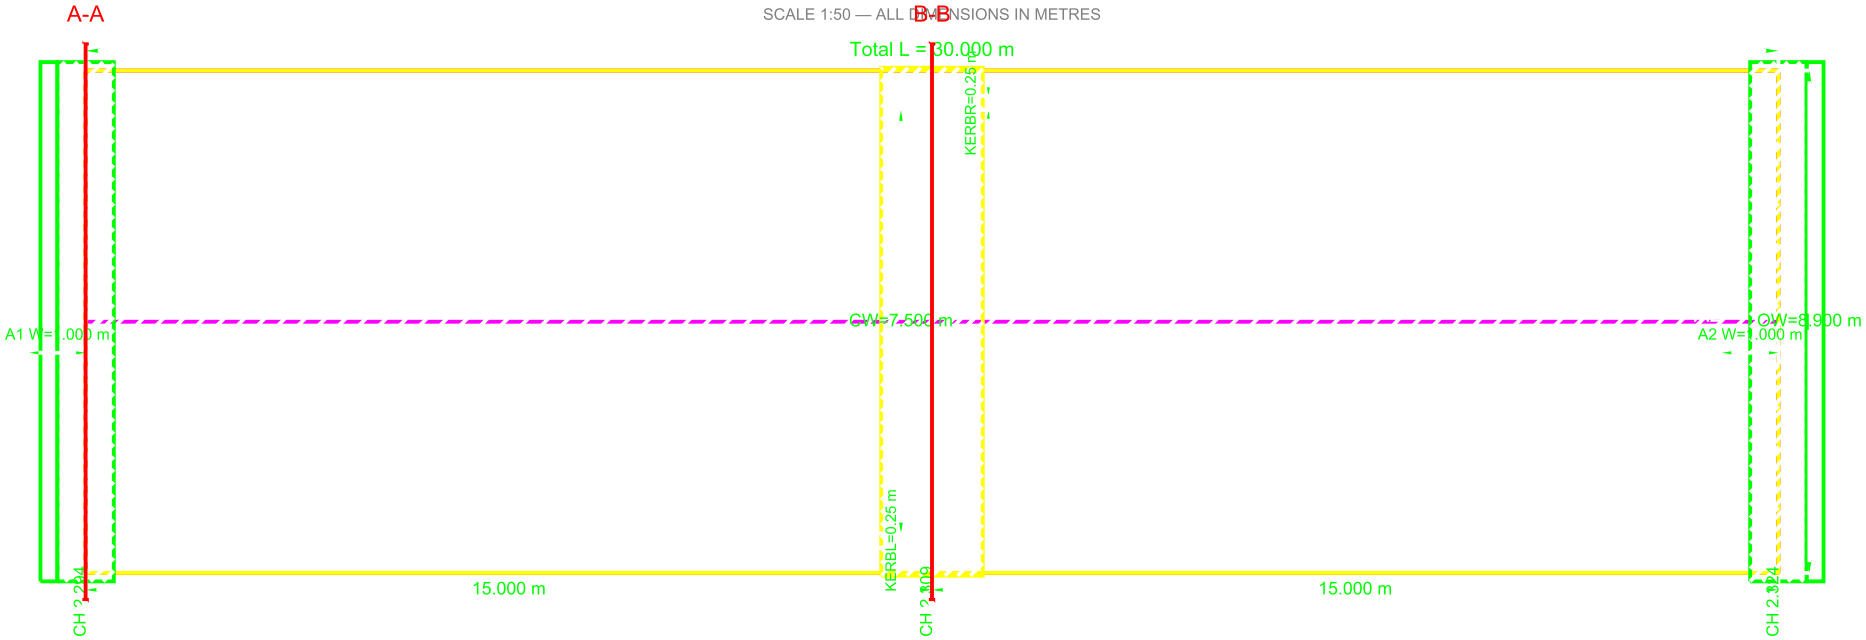
A-A
B-B
SCALE 1:50 — ALL DIMENSIONS IN METRES
Total L = 30.000 m
KERBR=0.25 m
CW=7.500 m
OW=8.900 m
A1 W=1.000 m
A2 W=1.000 m
KERBL=0.25 m
15.000 m
15.000 m
CH 2.294
CH 2.309
CH 2.324

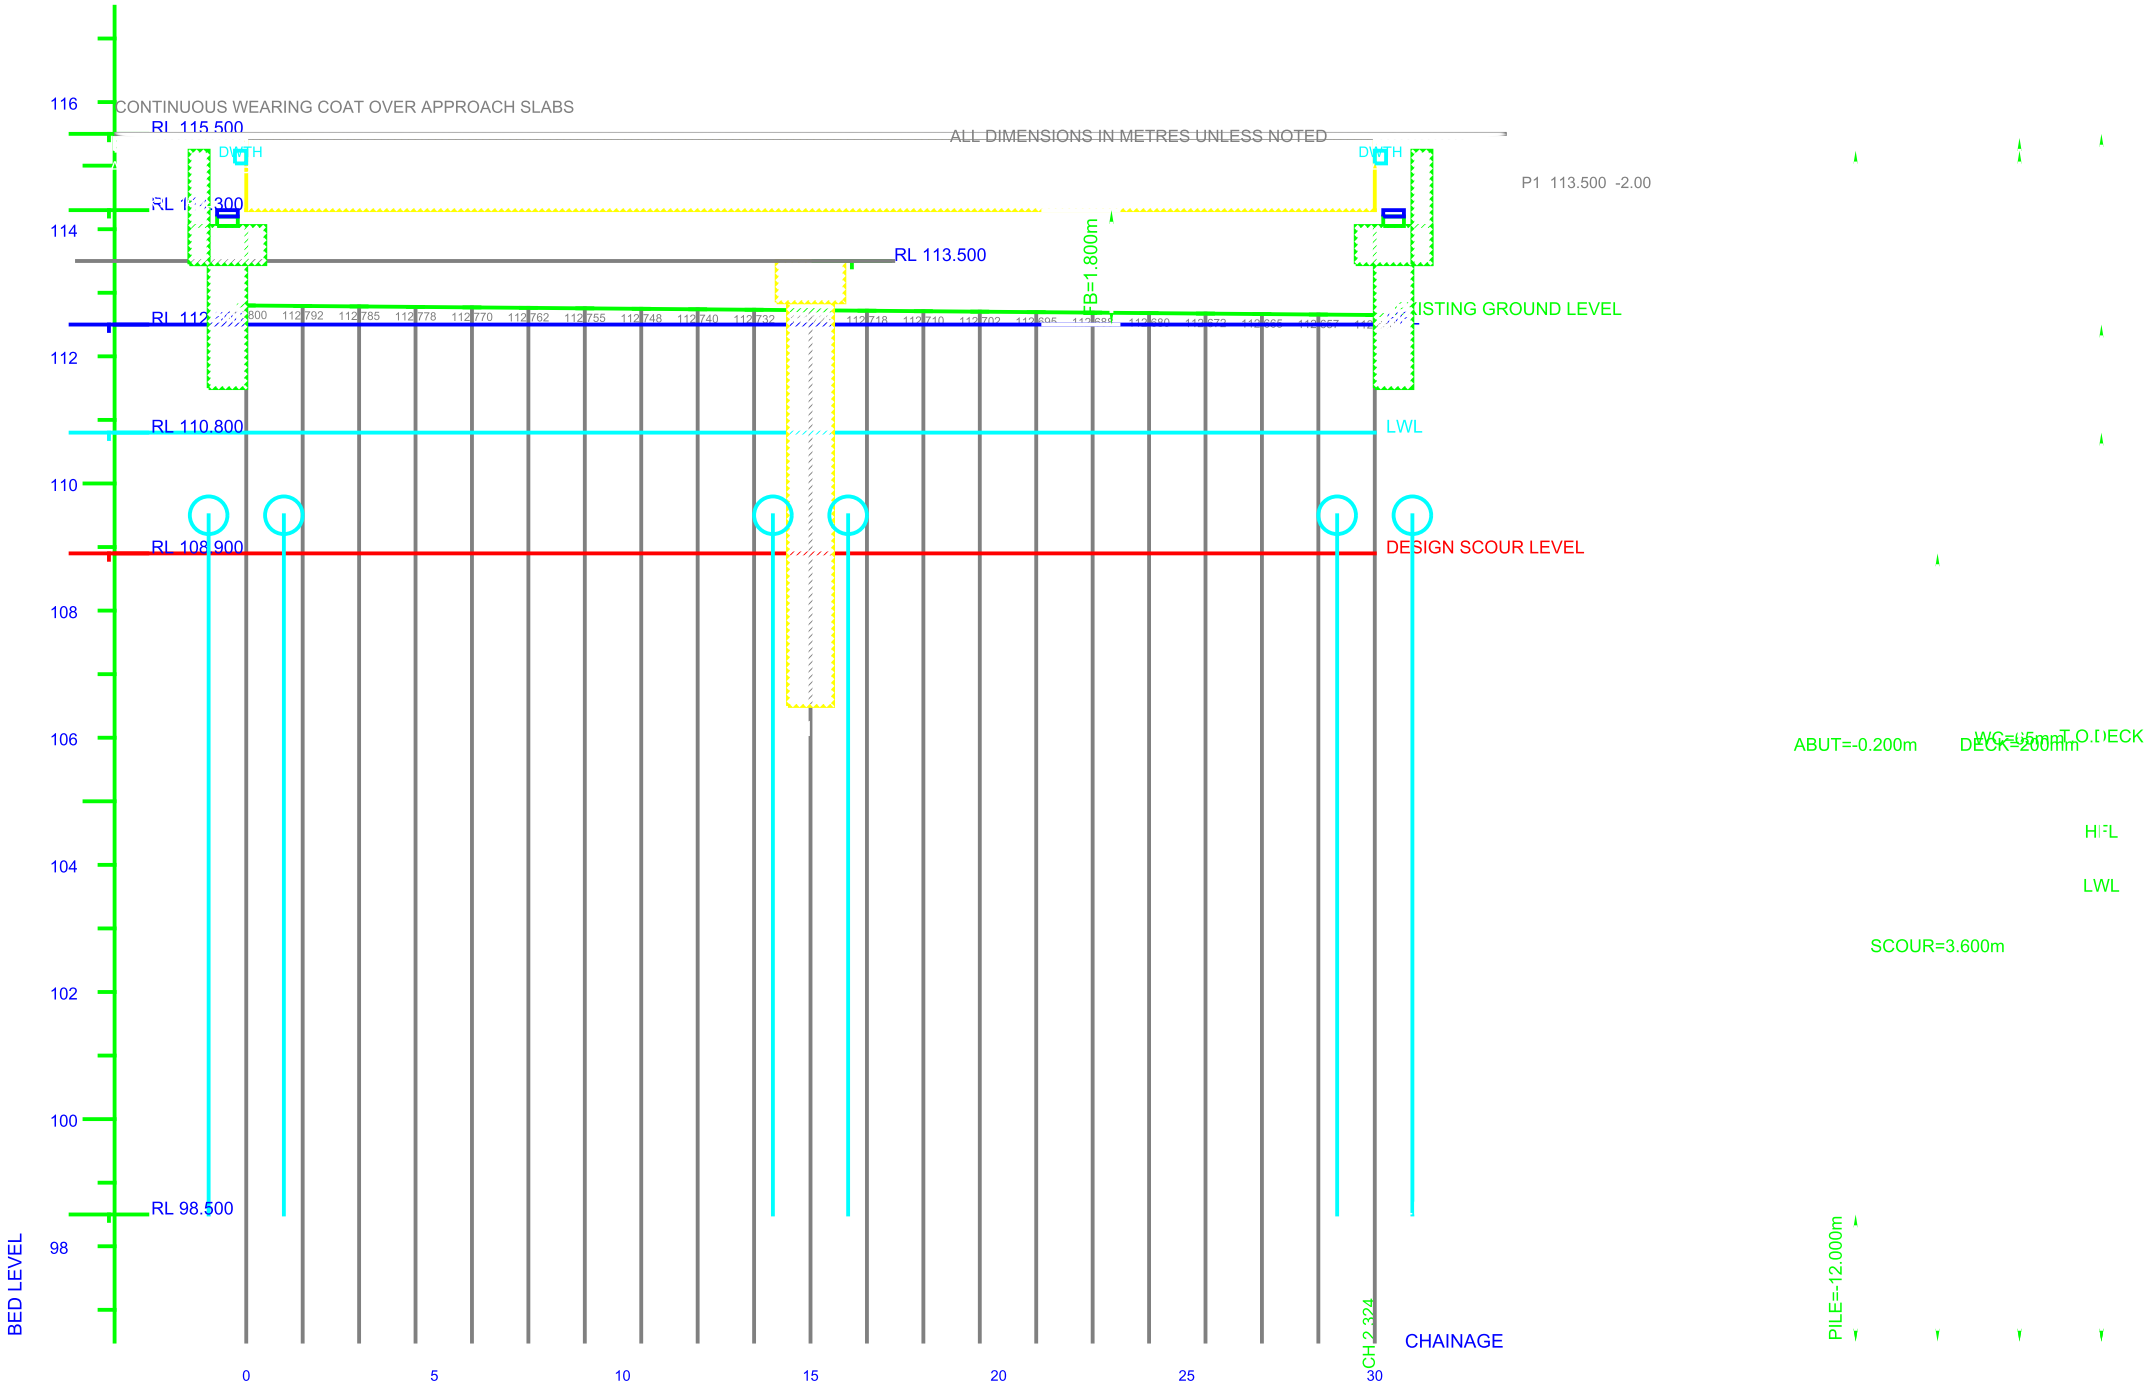
CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
P1 113.500 -2.00
116
114
112
110
108
106
104
102
100
98
BED LEVEL
RL 115.500
RL 114.300
RL 113.500
RL 112
RL 110.800
RL 108.900
RL 98.500
DWTH
DWTH
FB=1.800m
112.800
112.792
112.785
112.778
112.770
112.762
112.755
112.748
112.740
112.732
112.718
112.710
112.702
112.695
112.688
112.680
112.672
112.665
112.657
EXISTING GROUND LEVEL
LWL
DESIGN SCOUR LEVEL
ABUT=-0.200m
DECK=200mm
WC=65mm T.O.DECK
HFL
LWL
SCOUR=3.600m
PILE=-12.000m
CH 2.324
CHAINAGE
0
5
10
15
20
25
30

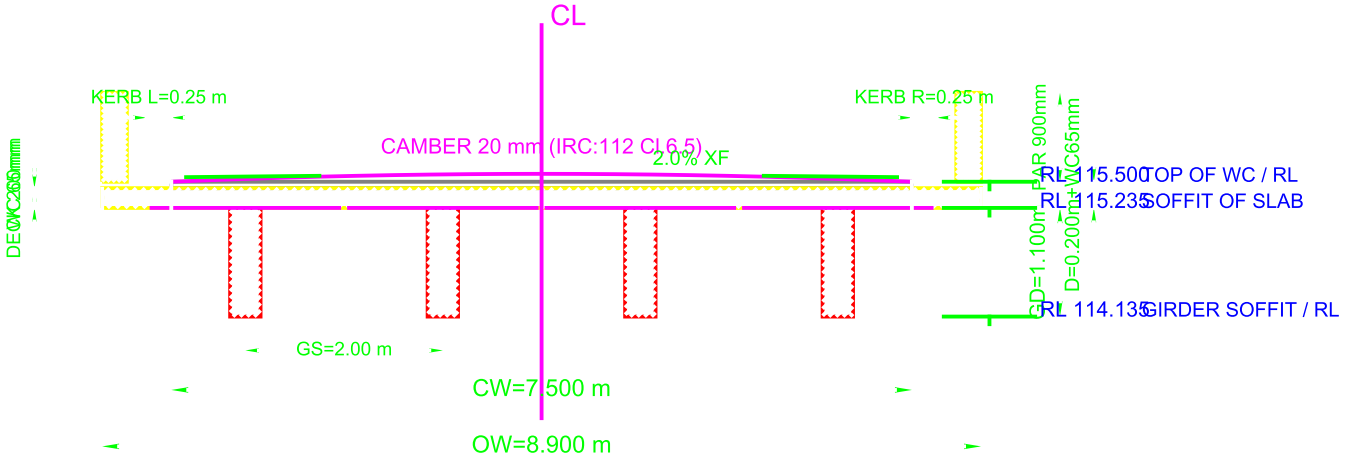
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
GD=1.100m
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
RL 114.135 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=8.900 m


Cap L = 3.200 m
Cap W = 3.200 m

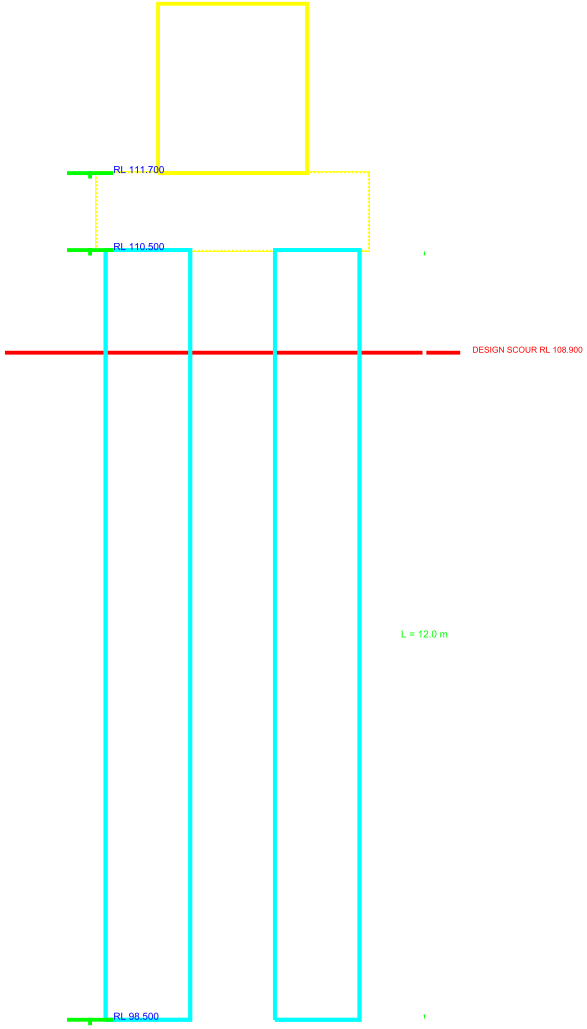
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m







| | | | | |
|---|---|---|---|---|
| QA-ABT-CAP- | Abutment cap depth | 0 mm | >= 450 mm | OK |
| QA-ABT-CAP- | Cap projection front/rear | 0/0 mm | 100-250 / 250-600 mm | OK |
| QA-DW-THK | Dirt wall thickness | 0 mm | >= 250 mm | OK |
| QA-DW-TOP | Dirt wall to slab soffit | 1.19 m | >= 0.30 m | OK |
| QA-DW-WEEF | Weep holes provided | 4 | 1 per 3 m | OK |
| QA-ABT-OT | Overturning FOS | 1.36 | >= 1.40 | FAIL |
| QA-ABT-SL | Sliding FOS | 1.39 | >= 1.40 | FAIL |
| QA-ABT-BRG | Base pressure | 159.91 kPa | <= 350.00 kPa | OK |




60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▼ GAP ▼
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

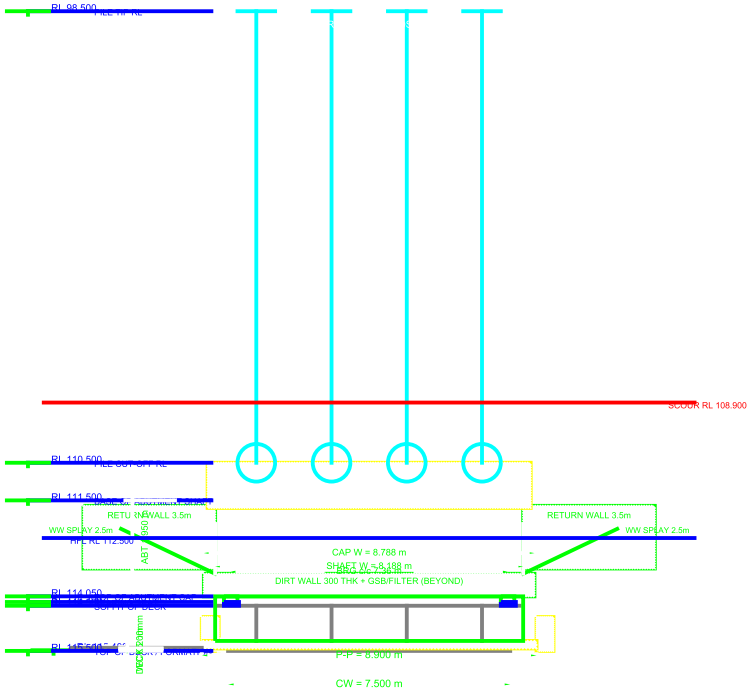



| | | | | |
|---|---|---|---|---|
| QA-ABT-CAP- | Abutment cap depth | 0 mm | >= 450 mm | OK |
| QA-ABT-CAP- | Cap projection front/rear | 0/0 mm | 100-250 / 250-600 mm | OK |
| QA-DW-THK | Dirt wall thickness | 0 mm | >= 250 mm | OK |
| QA-DW-TOP | Dirt wall to slab soffit | 1.19 m | >= 0.30 m | OK |
| QA-DW-WEEF | Weep holes provided | 4 | 1 per 3 m | OK |
| QA-ABT-OT | Overturning FOS | 1.36 | >= 1.40 | FAIL |
| QA-ABT-SL | Sliding FOS | 1.39 | >= 1.40 | FAIL |
| QA-ABT-BRG | Base pressure | 159.91 kPa | <= 350.00 kPa | OK |