SCALE 1:50 — ALL DIMENSIONS IN METRES

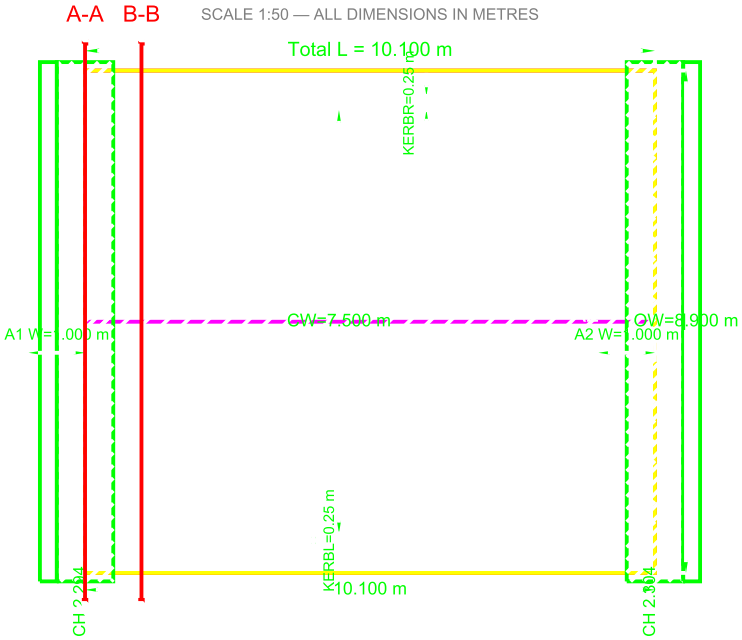

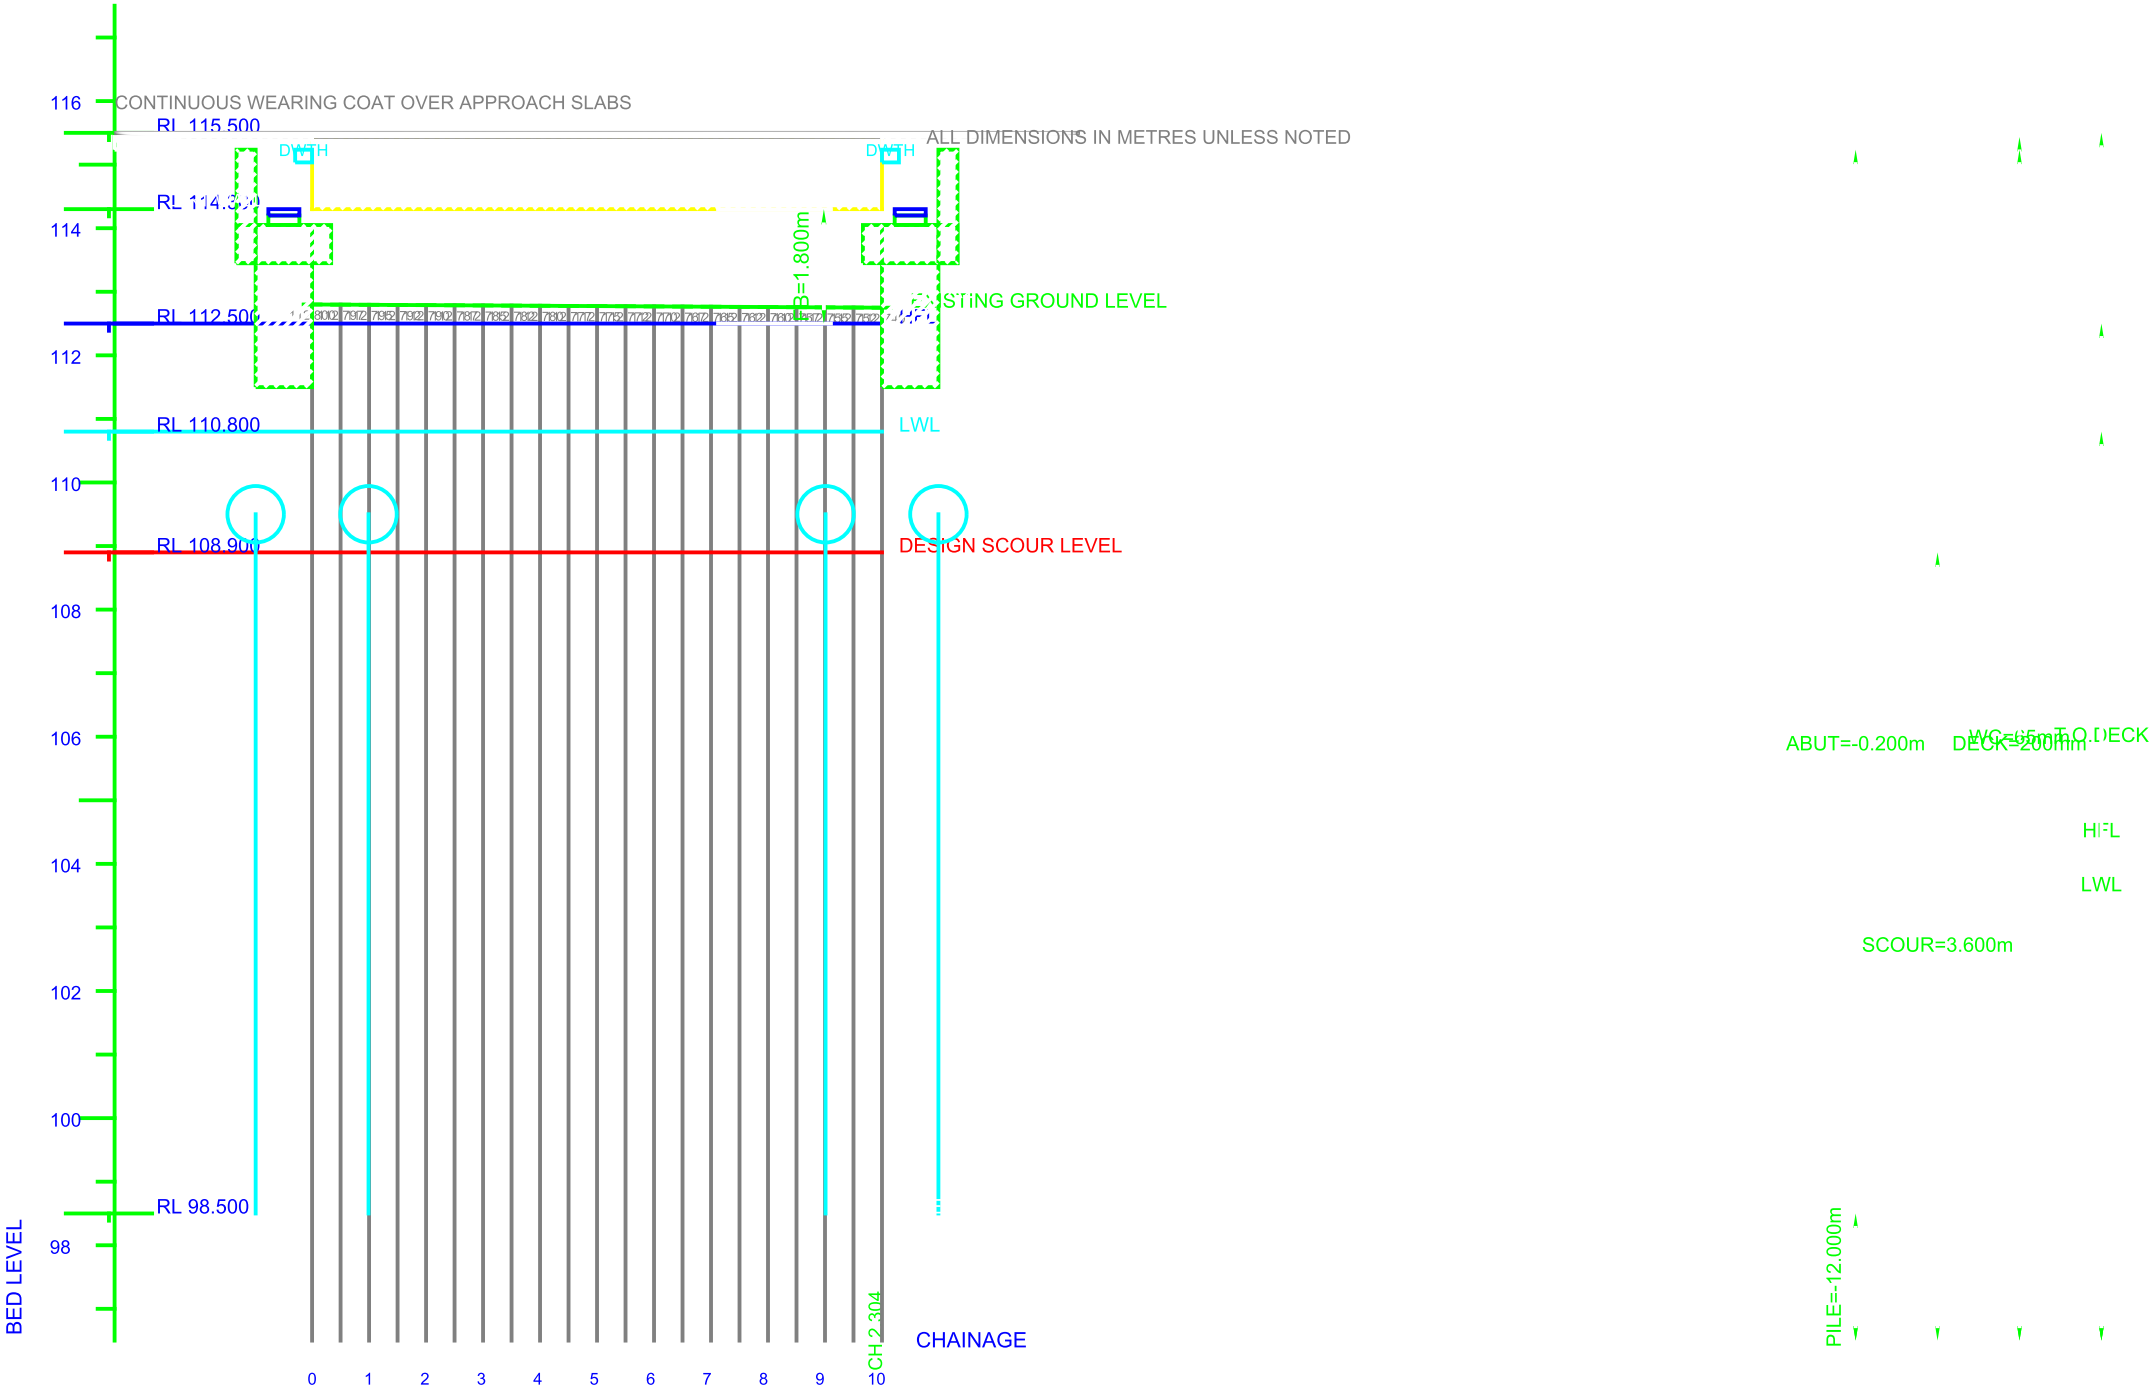
CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
116
114
112
110
108
106
104
102
100
98
BED LEVEL
RL 115.500
RL 114.300
RL 112.500
RL 110.800
RL 108.900
RL 98.500
DWTH
DWTH
B=1.800m
EXISTING GROUND LEVEL
LWL
DESIGN SCOUR LEVEL
CH 2.304
CHAINAGE
0
1
2
3
4
5
6
7
8
9
10
ABUT=-0.200m
DECK=200mm
WC=65mm T.O.DECK
HFL
LWL
SCOUR=3.600m
PILE=-12.000m

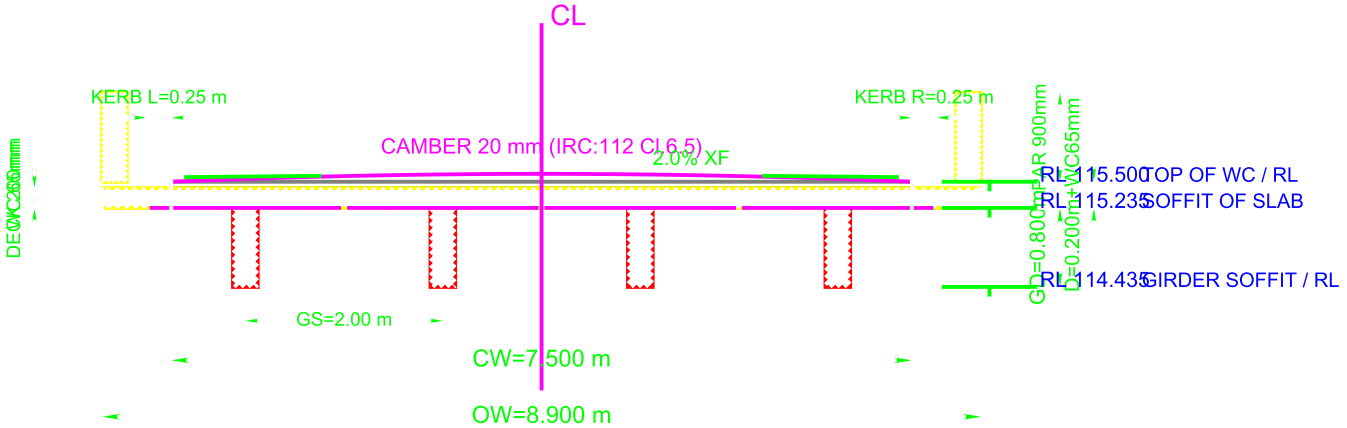
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 265mm
GD=0.800m PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
RL 114.435 GIRDER SOFFIT / RL
GS=2.00 m
CW=7.500 m
OW=8.900 m


Cap L = 3.200 m
Cap W = 3.200 m

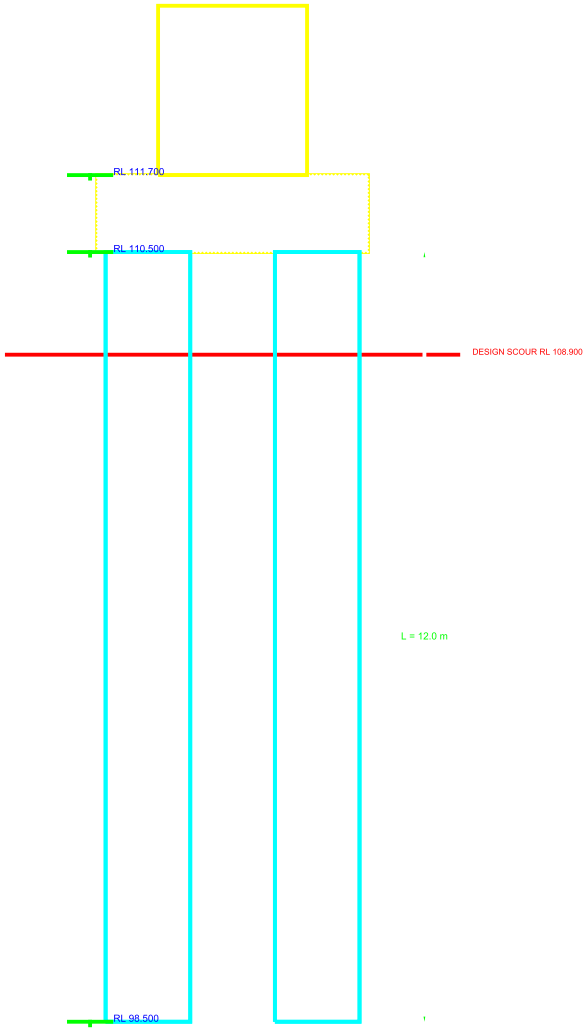
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m







QA-ABT-CAP-DEPTH	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-PROJ	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK




60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
JOINT 160 mm
DEPTH 80 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

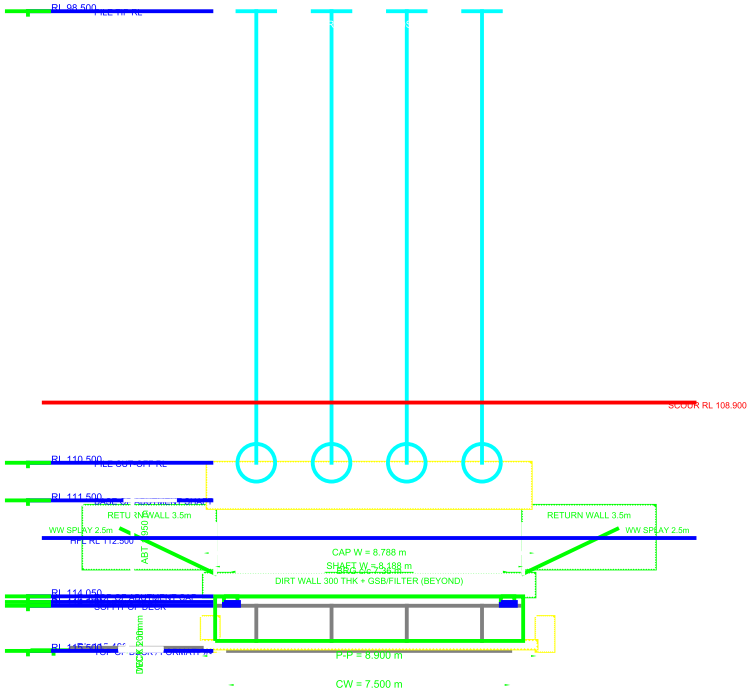

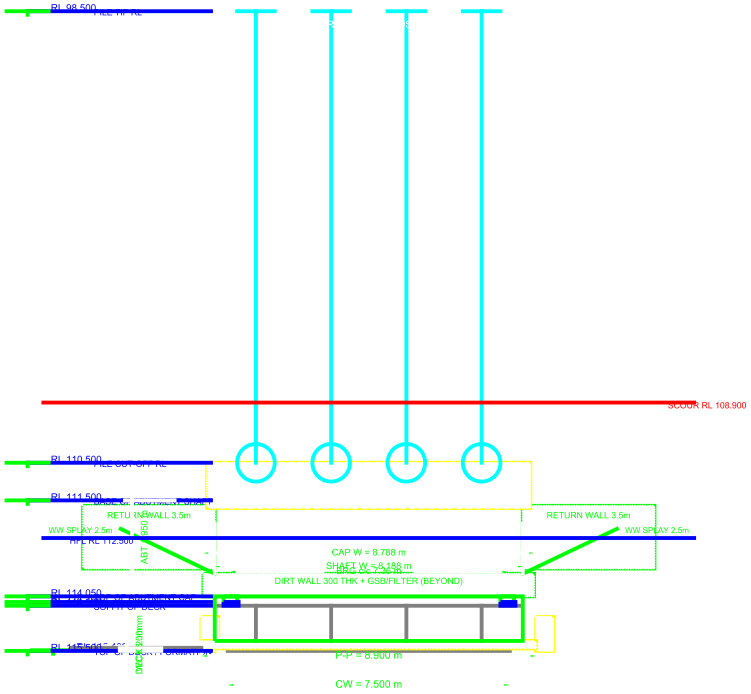

QA-ABT-CAP-[illegible]	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-[illegible]	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEP	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK