

SCALE 1:300 — ALL DIMENSIONS IN METRES

A-A
B-B
Total L = 180.000 m
KERBR=0.25 m
CW=10.500 m
KERBL=0.25 m
A1 W=[illegible]00 m
W=14.900 m
A2 W=[illegible] m
30.000 m
30.000 m
30.000 m
30.000 m
30.000 m
30.000 m
CH 2
CH 2
CH 2.354
CH 2.384
CH 2.414
CH 2.444
CH 2.474

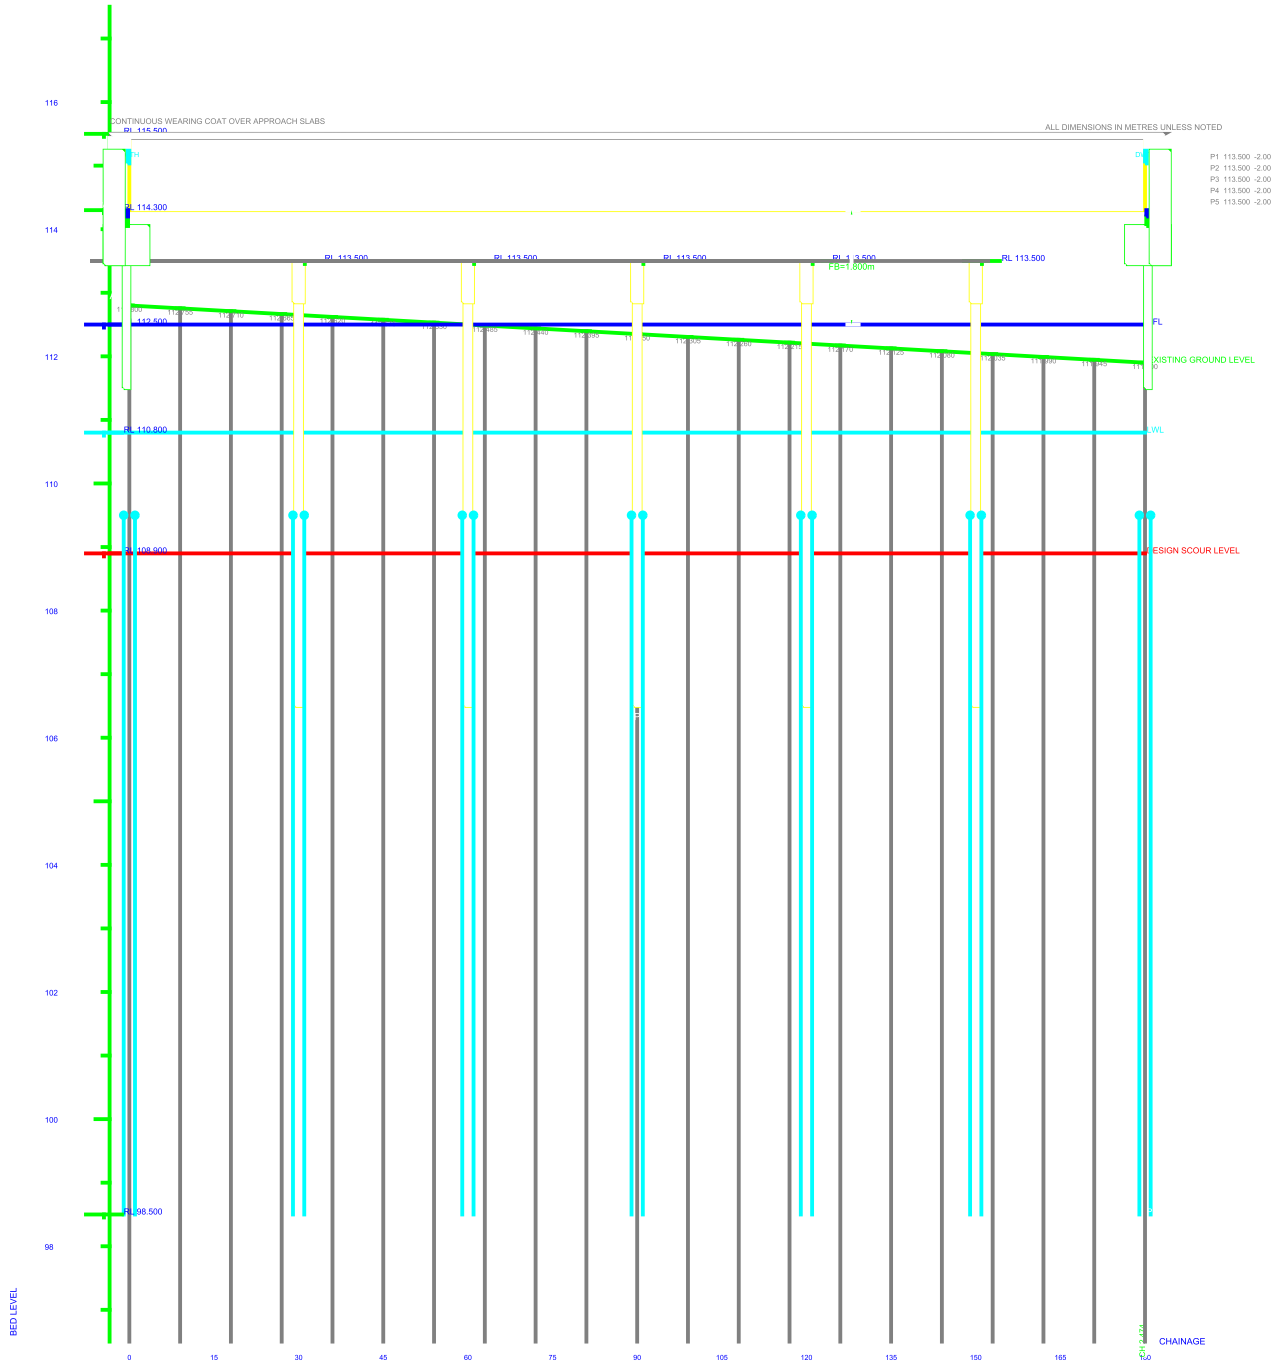
CONTINUOUS WEARING COAT OVER APPROACH SLABS
ALL DIMENSIONS IN METRES UNLESS NOTED
P1 113.500 -2.00
P2 113.500 -2.00
P3 113.500 -2.00
P4 113.500 -2.00
P5 113.500 -2.00
RL 115.500
RL 114.300
RL 113.500
RL 113.500
RL 113.500
RL 113.500
RL 113.500
FB=1.800m
112.500
FL
112.755
112.710
112.665
112.620
112.530
112.485
112.440
112.395
112.305
112.260
112.215
112.170
112.125
112.080
112.035
111.990
111.945
EXISTING GROUND LEVEL
RL 110.800
LWL
RL 108.900
DESIGN SCOUR LEVEL
RL 98.500
116
114
112
110
108
106
104
102
100
98
BED LEVEL
0
15
30
45
60
75
90
105
120
135
150
165
180
CHAINAGE

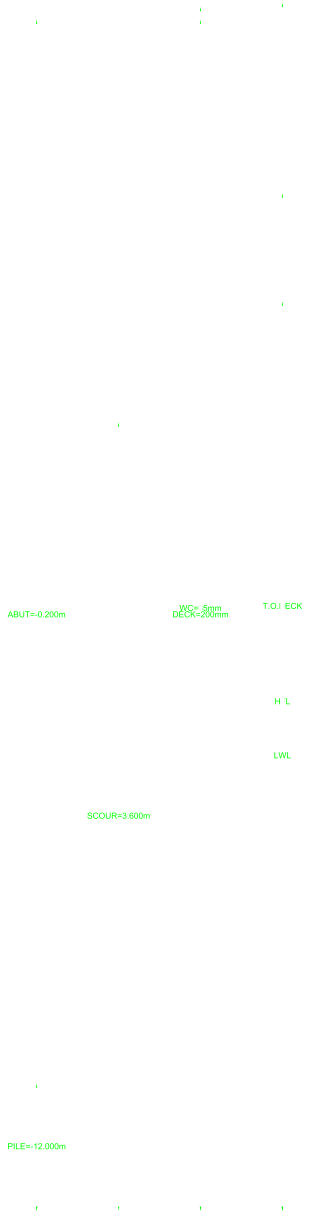
ABUT=-0.200m
WC= 5mm
DECK=200mm
T.O.DECK
HFL
LWL
SCOUR=3.600m
PILE=-12.000m

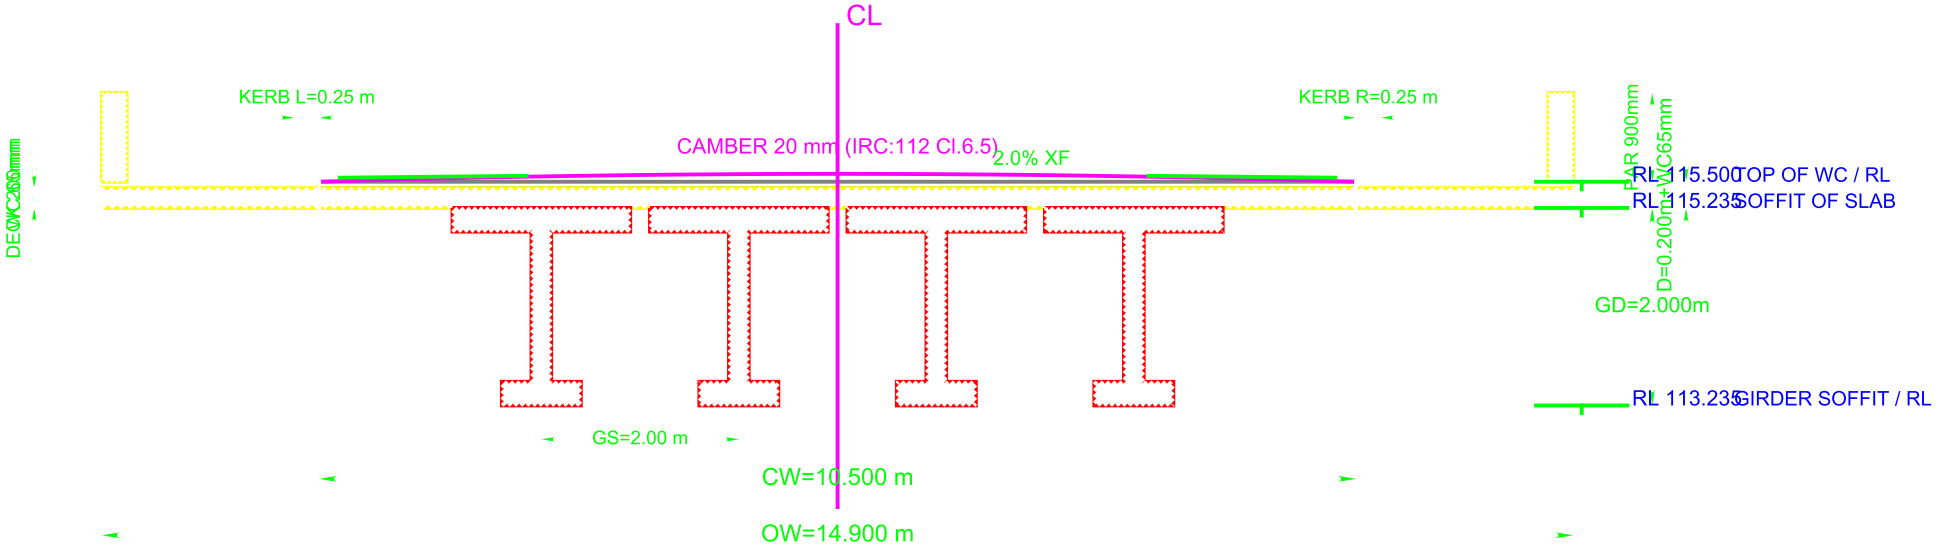
CL
KERB L=0.25 m
KERB R=0.25 m
CAMBER 20 mm (IRC:112 Cl.6.5)
2.0% XF
DECK 200mm
WC 65mm
PAR 900mm
D=0.200m+WC65mm
RL 115.500 TOP OF WC / RL
RL 115.235 SOFFIT OF SLAB
GD=2.000m
RL 113.235 GIRDER SOFFIT / RL
GS=2.00 m
CW=10.500 m
OW=14.900 m


Cap L = 3.200 m
Cap W = 3.200 m

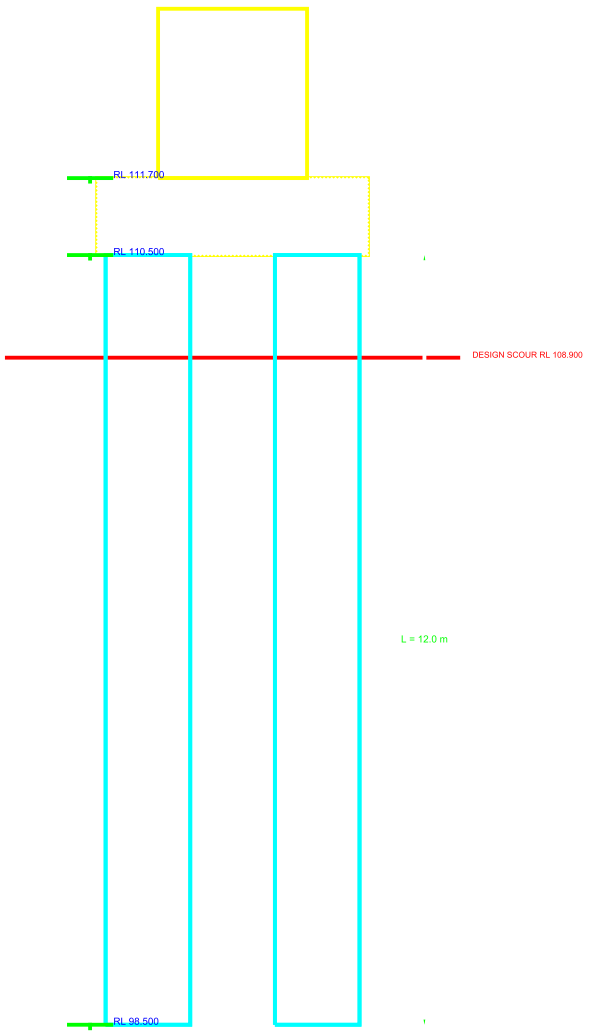
RL 111.700
RL 110.500
DESIGN SCOUR RL 108.900
L = 12.8 m
RL 98.500


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


DW=0.30m
L=9.20m
WE=2.30m
CAP W=1.60m
SH=1.00m


H=6.80m
Shaft=1.20m
HFL RL 112.500
Cap=1.80m


DW 200
H=2.80m
L=9.20m
WW=2.5m


THK=1.20m
L=9.00m

QA-ABT-CAP-I	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-I	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK


APP THK=0.20m
THK=1.00m


60 mm
450 mm
PTFE Ø270 mm
Ø450 mm
Ø450 mm


GAP 151 mm
▾ GAP ▾
DEPTH 80 mm
JOINT 160 mm

SCALE 1:75 — DIMENSIONS IN METRES UNLESS NOTED

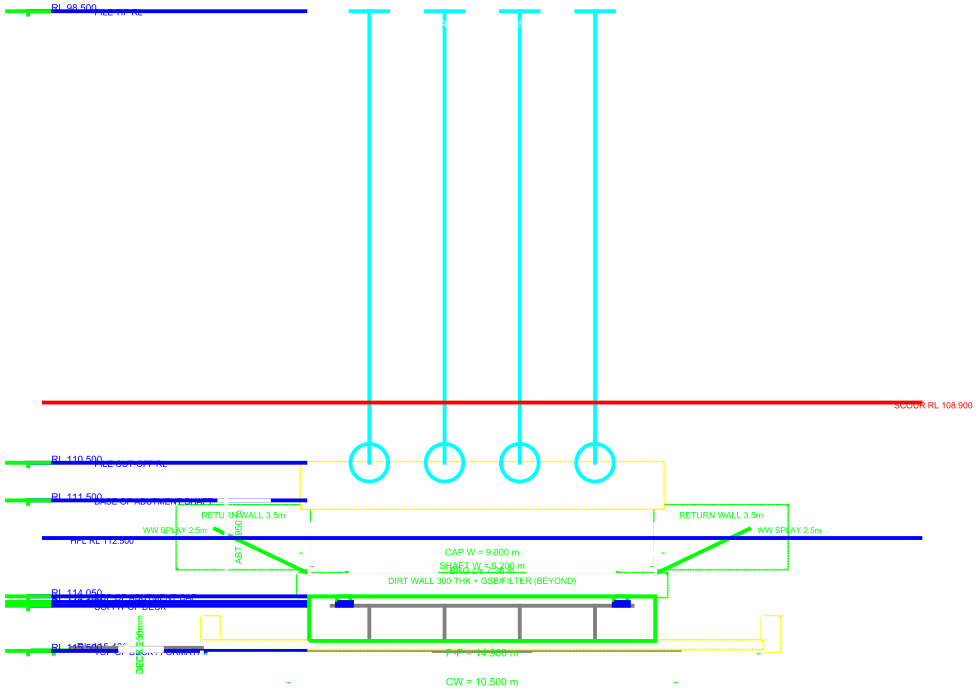
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
RL 111.500
BASE OF ABUTMENT SHAFT
HFL RL 112.500
RETURN WALL 3.5m
WW SPLAY 2.5m
ABT 950
RETURN WALL 3.5m
WW SPLAY 2.5m
CAP W = 9.800 m
SHAFT W = 9.200 m
BRG c/c 7.35 m
DIRT WALL 300 THK + GSB/FILTER (BEYOND)
RL 114.050
SOFFIT OF DECK
RL 115.500
TOP OF DECK / FORMATION
P-P = 14.900 m
CW = 10.500 m

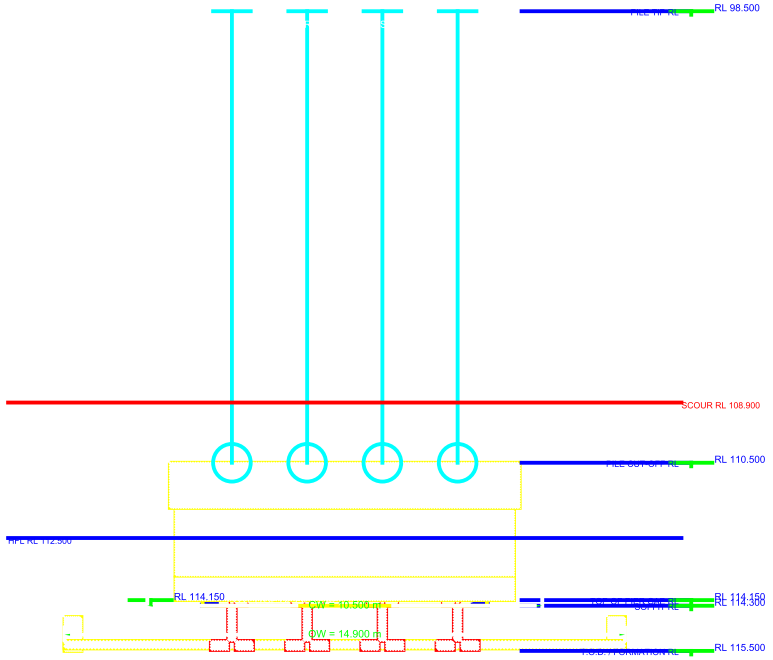
RL 98.500
PILE TIP RL
SCOUR RL 108.900
RL 110.500
PILE CUT-OFF RL
HFL RL 112.500
RL 114.150
CW = 10.500 m
OW = 14.900 m
RL 114.150
RL 114.300
SOFFIT RL
RL 115.500
T.O.D. / FORMATION RL

QA-ABT-CAP-	Abutment cap depth	0 mm	>= 450 mm	OK
QA-ABT-CAP-	Cap projection front/rear	0/0 mm	100-250 / 250-600 mm	OK
QA-DW-THK	Dirt wall thickness	0 mm	>= 250 mm	OK
QA-DW-TOP	Dirt wall to slab soffit	1.19 m	>= 0.30 m	OK
QA-DW-WEEF	Weep holes provided	4	1 per 3 m	OK
QA-ABT-OT	Overturning FOS	1.36	>= 1.40	FAIL
QA-ABT-SL	Sliding FOS	1.39	>= 1.40	FAIL
QA-ABT-BRG	Base pressure	159.91 kPa	<= 350.00 kPa	OK