

**Quantitative processing of broadband data as implemented in a scientific splitbeam echosounder**

Lars Nonboe Andersen,<sup>1</sup> Dezhang Chu,<sup>2</sup> Nils Olav Handegard,<sup>3</sup> Harald Heimvoll,<sup>1</sup> Rolf Korneliussen,<sup>3</sup> Gavin J. Macaulay,<sup>3</sup> Egil Ona,<sup>3</sup> Ruben Patel,<sup>4</sup> and Geir Pedersen<sup>3, a)</sup>

<sup>1</sup>*Kongsberg Discovery AS, Strandpromenaden 50, 3191, Horten, Norway*

<sup>2</sup>*Fishery Resource Analysis and Monitoring Division, Northwest Fisheries Science Center, National Marine Fisheries Service, National Oceanic and Atmospheric Administration, 2725 Montlake Blvd. E. Seattle, WA, 98112, USA*

<sup>3</sup>*Marine Ecosystem Acoustics, Institute of Marine Research, Bergen, 5001, Norway*

<sup>4</sup>*Codelab, Bergen, Norway*

1. The use of quantitative broadband echosounders for biological studies and surveys can offer considerable advantages over narrowband echosounders. These include improved spectral-based target identification and significantly increased ability to resolve individual targets. An understanding of current processing steps is required to fully utilize and further develop broadband acoustic methods in marine ecology.

2. We describe the steps involved in processing broadband acoustic data from raw data to frequency dependent target strength ( $TS(f)$ ) and volume backscattering strength ( $Sv(f)$ ) using data from the EK80 broadband scientific echosounder as examples. Although the overall processing steps are described and build on established methods from the literature, multiple choices need to be made during implementation.

3. To highlight and discuss some of these choices and facilitate a common understanding within the community, we have also developed a Python code which will be made publicly available and open source. The code follows the steps using raw data from two single pings, showing the step-by-step processing from raw data to  $TS(f)$  and  $Sv(f)$ .

4. This code can serve as a reference for developing custom code or implementation in existing processing pipelines, as an educational tool and as a starting point for further development of broadband acoustic methods in fisheries acoustics.

Keywords:

---

<sup>a)</sup>[geir.pedersen@hi.no](mailto:geir.pedersen@hi.no)

## I. INTRODUCTION

Echounders are used for remote sensing marine ecosystems. As early as 1935, [Sund \(1935\)](#) observed the distribution of spawning cod in the Lofoten area using a single beam echosounder. The method was further developed to map the abundance of fish, driven by the need for fisheries management ([Simmonds and MacLennan, 2005](#)). More recently, fisheries acoustics sensors have been deployed on a wide range of platforms, including observatories, autonomous underwater vehicles ([Fernandes \*et al.\*, 2003](#)), uncrewed surface vehicles ([De Robertis \*et al.\*, 2021](#)) and vessels of opportunity, observing a wide range of ecosystem processes across different spatial and temporal scales ([Godø \*et al.\*, 2014](#)).

Today echounders can produce pulses with a wide and continuous frequency range (broadband pulses), compared to the conventional narrowband systems. This provides in most cases significantly better along-beam resolution, a higher signal to noise ratio than narrowband pulses ([Chu and Stanton, 1998](#); [Ehrenberg and Torkelson, 2000](#)), and improved frequency resolution for backscatter categorization ([Korneliussen \*et al.\*, 2018](#)). [Lavery \*et al.\* \(2010\)](#) used broadband signals to reduce the ambiguities in interpretation of acoustic scattering from zooplankton and oceanic microstructure. [Stanton \*et al.\* \(2012\)](#) used low frequency broadband pulses (1-6 kHz) that included the resonance frequency of swimbladdered fish to classify size classes. [Blanluet \*et al.\* \(2019\)](#) used broadband acoustics, with ground truthing, to characterize the composition of two sound scattering layers (SSL). [Bassett \*et al.\* \(2018\)](#) showed that broadband signals may be helpful in characterizing smaller fishes with swimbladders and euphausiids. [Benoit-Bird and Waluk \(2020\)](#) were able to effectively discriminate three monospecific aggregations of species (hake, anchovy and krill) using broadband signals (45-170 kHz). [Lavery \*et al.\* \(2017\)](#) explored different broadband pulse shapes to increase the ability to resolve adjacent single targets as well as near boundaries in tank experiments. By applying high frequency broadband pulses to fish-like artificial targets, [Kubilius \*et al.\* \(2020\)](#) demonstrated the potential for acoustic sizing of individually resolved fishes in a controlled ex situ environment. Utilizing the increased spatial resolution [Hasegawa \*et al.\* \(2021\)](#) were able to isolate single fishes and discriminate successfully between average frequency responses of walleye pollock and pointhead flounder.

Several scientific broadband echosounder systems have been developed for laboratory use ([Chu \*et al.\*, 1992](#); [Conti and Demer, 2003](#); [Forland \*et al.\*, 2014](#)), some prototype or custom-made systems ([Barr \*et al.\*, 2002](#); [Briseño-Avena \*et al.\*, 2015](#); [Foote \*et al.\*, 2005](#); [Imaizumi \*et al.\*, 2009](#); [Simmonds \*et al.\*, 1996](#); [Zakharia \*et al.\*, 1989](#) 1996) and some commercially

available systems (Denny and Simpson, 1998; Ehrenberg and Torkelson, 2000; Gordon and Zedel, 1998; Stanton *et al.*, 2010; Zedel *et al.*, 2003). More widespread use of broadband acoustics in fisheries and ecosystem research have followed from the upgrade of widely used narrowband systems to gain broadband capabilities.

Signal processing methods for broadband echosounders (Stanton and Chu, 2008) are based on radar signal processing theory, with further adaptation to echosounders (Bassett *et al.*, 2018; Lavery *et al.*, 2017). When implementing the equations to computer processing code, some choices are well founded in the signal processing literature whereas others are of a more practical and ad-hoc nature. The latter is typically missing in the literature, making it difficult to benchmark new methods and to test the implementation in new echosounders and post processing software.

The objective of this paper and associated code is to provide a benchmark for developing and implementing signal processing algorithms for broadband echosounder. We present the design goals, implementation details, and recommended procedures and processing required to obtain quantitative broadband data. The steps include pulse compression, target strength as a function of frequency ( $TS(f)$ , dB re  $1\text{m}^2$ ), and volume backscattering strength as a function of frequency ( $S_v(f)$ , dB re  $1\text{m}^{-1}$ ). The intention is that the code will be used as a starting point for implementations in various relevant data processing software, for further developing active acoustic broadband signal processing, and to serve as a learning resource.

## II. SIGNAL FLOW AND INITIAL PROCESSING

### A. Accompanying code

The code accompanying this paper is written in the Python programming language (v3.10) and is available through GitHub (see VII for code and data availability) together with the data used in the examples. All single ping processing steps with respective figures in the paper can be reproduced by running the main script, `main.py`. Reproduction of Fig. 5a and Fig. 8a requires downloading the original echosounder raw data separately and using the scripts (`TSfEchogram.py` and `SvfEchogram.py`). Without loss of generality, we use the Simrad EK80 echosounder as an example since it is currently the most commonly used broadband system in the marine ecosystem acoustics field. The test data sets accompanying the code are representative for the data contained in Simrad EK80 raw files. In order to make the code echosounder independent simple json strings are used as input. Detailed

information on settings used during data collection is available in the code and the data files on GitHub.

Our presentation uses nomenclature and approaches that are commonly used for narrowband echosounder systems, which were derived from radar processing (Cook and Bernfield, 1967). In particular, the expressions for target strength (TS, dB re  $1\text{m}^2$ ) and volume backscattering strength ( $S_v$ , dB re  $1\text{m}^{-1}$ ) (MacLennan *et al.*, 2002) are presented in a similar manner for broadband signals as for narrowband signals.

## B. System overview

A basic quantitative echosounder system consists of a transducer, a transceiver, and a computer program that controls the operation of the transceiver and records received signals. During transmission the program defines the signals that are created as electric signals in the transceiver, converted to acoustic signals by the transducer and transmitted into the water. The acoustic signals propagate through the water, are reflected or scattered by objects in the water, and propagate back to the transducer. During reception the transducer converts the received acoustic signals to electric signals, which are received, pre-amplified, filtered, digitized, processed in the transceiver, and then transferred to the controlling program for further data processing and storage (Fig. 1). Many types of transmit signals are feasible - this paper considers only upswep linear frequency modulated signals (also known as linear chirps).

## C. Signal generation

The controlling computer program generates a short-duration digital transmit signal (a ping),  $y_{\text{tx}}(n)$ , where  $n$  is the sample index in the discrete time domain. The nominal pulse duration,  $\tau$ , is defined as the duration of the digital transmit signal  $y_{\text{tx}}(n)$ . Typical broadband pulses are linear upswep pulses windowed by an envelope function. The generated signal is converted to an analogue electric signal  $y_{\text{tx,e}}(t)$  and amplified by the transceiver to obtain the analogue signal  $y_{\text{tx,e}}(t)$ , where  $t$  is the time for the signal. The analogue and amplified signals are passed on to the transducer to generate the transmitted acoustic signal  $y_{\text{tx,a}}(t)$  in the water. For a splitbeam echosounder system, there are typically three or four channels to allow estimation of the angle of arriving echoes, and the signal is typically transmitted with equal power across the channels.

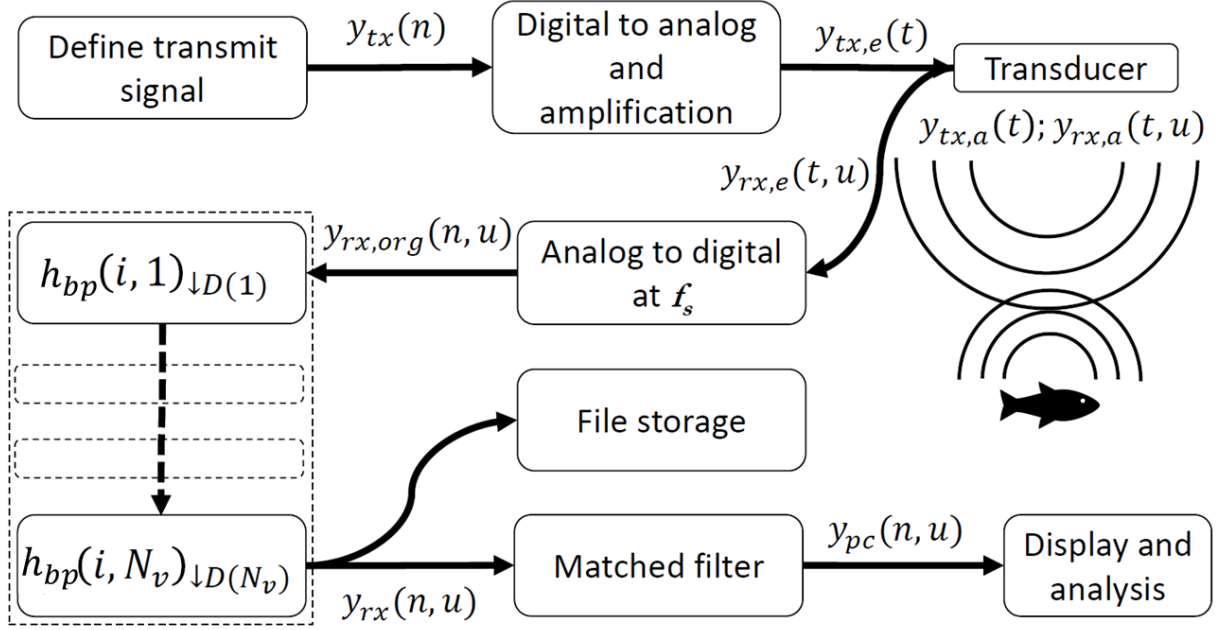


Figure 1. Signal and data flow in the Simrad EK80 system. An echosounder ping starts with the definition of a transmit signal (upper left) and ends with file storage and display and analysis after matched filtering.

The most commonly used transmit signals (e.g. in Simrad EK80) are linear frequency modulated signals with an applied Tukey window function (see e.g. [Lavery et al. \(2017\)](#) for a more in-depth treatment of this subject).

#### D. Signal reception

The returning acoustic signal,  $y_{rx,a}(t)$ , is received by each transducer sector,  $u$ , and converted to an analog electric signal,  $y_{rx,e}(t, u)$ , in the transducer and received by corresponding receiver channels,  $u$ , in the transceiver. The received electric signal,  $y_{rx,e}(t, u)$ , from each channel,  $u$ , is pre-amplified, filtered by an analog anti-aliasing filter, and digitized in the transceiver at a frequency of  $f_s$ , creating the digital signal,  $y_{rx,org}(n, u)$ .

To remove noise and reduce the quantity of data, the sampled signal from each channel is filtered and decimated in multiple stages,  $v$ , using complex bandpass filters,  $h_{bp}(i, v)$ , and decimation factors,  $D(v)$ . This processing step is approximately equivalent to a traditional demodulation process. See e.g. Table 1.2 in ([Demer et al., 2017](#)) for examples of values.

The individual filter coefficients for each filter and decimation stage are indexed by  $i$ . The output signal from each channel,  $u$ , from each filter and decimation stage,  $v$ , is then given by:

$$y_{\text{rx}}(n, u, v) = (y_{\text{rx}}(n, u, v-1) * h_{\text{bp}}(i, v))_{\downarrow D(v)}, v = 1, \dots, N_v, \quad (1)$$

where  $y_{\text{rx}}(n, u, 0)$  is set to  $y_{\text{rx,org}}(n, u)$ , being the signal before decimation,  $*$  indicates convolution,  $\downarrow$  indicates decimation by the factor  $D(v)$ , and  $N_v$  is the total number of filter stages. The output signal from the final filter and decimation stage,  $y_{\text{rx}}(n, u, N_v)$ , is shortened to  $y_{\text{rx}}(n, u)$  for convenience. For the output signal,  $y_{\text{rx}}(n, u)$ , the decimated sampling rate,  $f_{\text{s,dec}}$ , is given by:

$$f_{\text{s,dec}} = f_{\text{s}} \prod_{v=1}^{N_v} \frac{1}{D(v)}. \quad (2)$$

The characteristics of the bandpass filter and decimation factors are chosen with regard to the desired operating bandwidth, noise suppression levels, impulse response duration, and other common filter characteristics, with the aim of maintaining sufficient information in the data (Crochiere and Rabiner, 1983; Proakis and Manolakis, 2007). The frequency responses of the filters are shown in Fig. 2 and the corresponding filter coefficients and decimation factors are given in the test data set, where  $N_v = 2$ .

The original sample data  $y_{\text{rx,org}}(n, u)$  are not available in the EK80 data files. Instead, the filtered and decimated complex samples from each transducer channel  $y_{\text{rx}}(n, u)$  are stored in the data files. The data are recorded in computer data files for display and analysis by processing software. Additional information, such as that from position and motion sensors and system configuration data is also included in the files.

## E. Matched filtering (pulse compression)

To increase signal-to-noise ratio and resolution along the acoustic beam a matched filter may be applied to the raw data samples (Turin, 1960). This technique is also known as pulse compression (Klauder *et al.*, 1960), achieving the average transmitted power of a relatively long pulse while obtaining the range resolution of a shorter pulse. One approach for a matched filter is to use a normalized version of the ideal transmit signal as the replicate signal, filtered and decimated using the same filters and decimation factors as applied in Eq. 1. The normalized ideal transmit signal,  $\tilde{y}_{\text{tx}}(n)$ , is given by:

$$\tilde{y}_{\text{tx}}(n) = \frac{y_{\text{tx}}(n)}{\max(y_{\text{tx}}(n))} \quad (3)$$

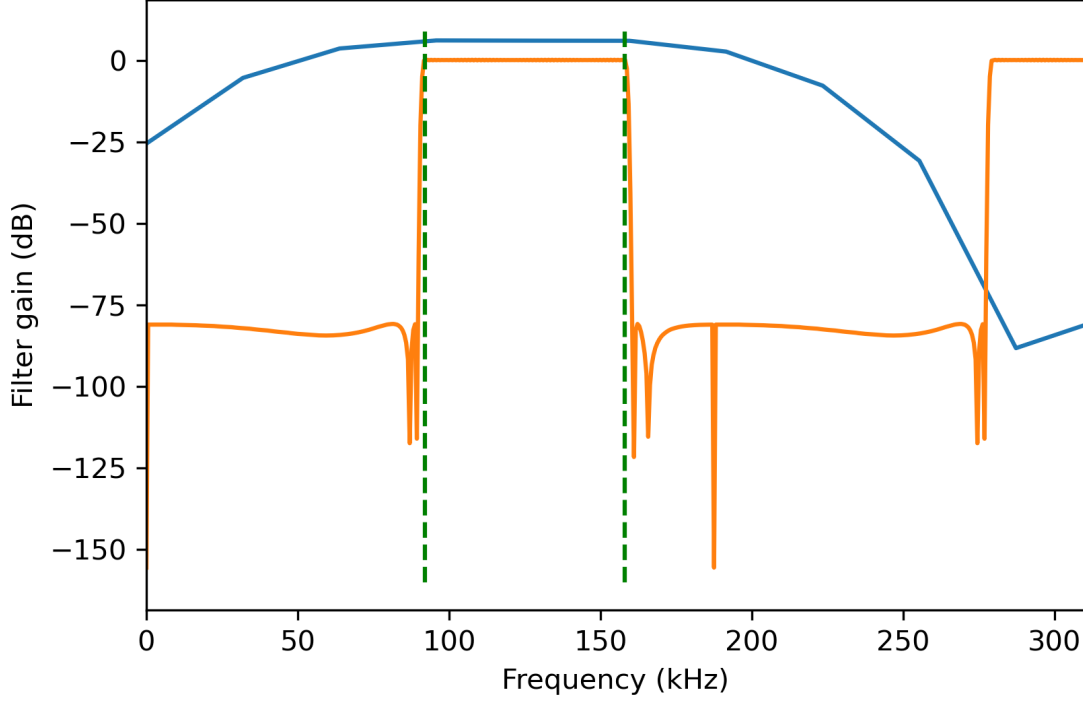


Figure 2. Example of frequency response (filter gain) of the filters in our test set. The blue and orange curve represents the filter response of the first and second filter. Note that the blue line is above 0 dB, this is caused by the transition from complex to real values. The vertical dashed green lines indicates the frequency range of the transmit signal.

where  $\max$  is the maximum value of  $y_{\text{tx}}(n)$ . The filtered and decimated output signal,  $\tilde{y}_{\text{tx}}(n, v)$ , from each filter stage,  $v$ , using the normalized ideal transmit signal,  $\tilde{y}_{\text{tx}}(n)$ , as the input signal, is given by:

$$\tilde{y}_{\text{tx}}(n, v) = [\tilde{y}_{\text{tx}}(n, v-1) * h_{\text{bp}}(i, v)]_{\downarrow D(v)}, v = 1, \dots, N_v, \quad (4)$$

where  $\tilde{y}_{\text{tx}}(n, 0)$  is set to  $\tilde{y}_{\text{tx}}(n)$ . The output signal from the final filter and decimation stage,  $\tilde{y}_{\text{tx}}(n, N_v)$ , is used as the matched filter and is denoted as  $y_{\text{mf}}(n)$  (Fig. 3a).

The auto correlation function of the matched filter signal ( $y_{\text{mf,auto}}(n)$ ) and the effective pulse duration ( $\tau_{\text{eff}}$ ) will be used in later processing steps.

$y_{\text{mf,auto}}(n)$  is defined as

$$y_{\text{mf,auto}}(n) = \frac{y_{\text{mf}}(n) * y_{\text{mf}}^*(-n)}{\|y_{\text{mf}}\|_2^2} \quad (5)$$



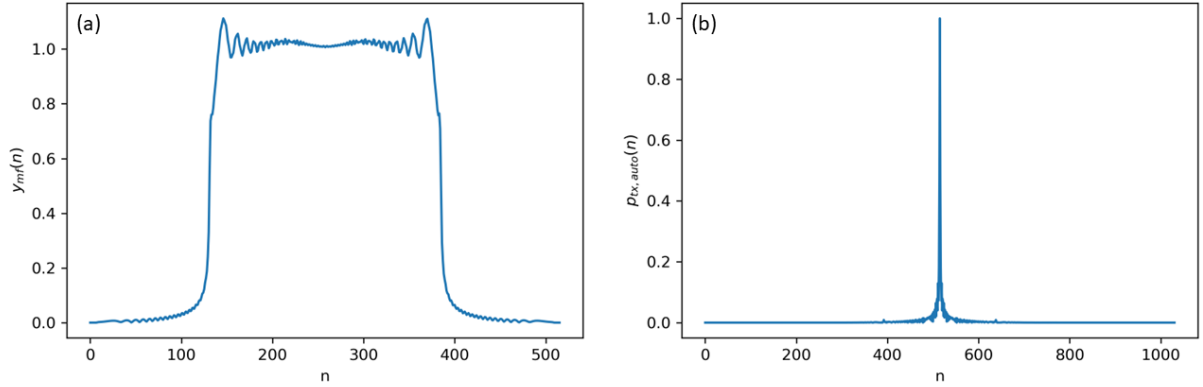


Figure 3. An example where the decimated sampling rate ( $f_{s,\text{dec}}$ , Eq. 2) is 125 kHz, the nominal pulse duration ( $\tau$ ) is 2 ms, and the effective pulse duration ( $\tau_{\text{eff}}$ , Eq. 6) is 0.01 ms. (a) The absolute value of the filtered and decimated output signal,  $y_{\text{mf}}(n)$ , from the final filter and decimation stage, that is used for the pulse compression. (b) The autocorrelation function  $p_{\text{tx,auto}}(n)$ .

where  $*$  denotes convolution,  $*$  complex conjugate, and  $\|y_{\text{mf}}\|_2$  the  $l^2$ -norm of  $y_{\text{mf}}$ , also known as the Euclidean norm. See e.g. Padgett and Anderson (2022) and Ghatak (2017) for background on  $l^2$ -norm.

$\tau_{\text{eff}}$  is defined as

$$\tau_{\text{eff}} = \frac{\sum p_{\text{tx,auto}}(n)}{\max(p_{\text{tx,auto}}(n))f_{s,\text{dec}}}, \quad (6)$$

where

$$p_{\text{tx,auto}}(n) = |y_{\text{mf,auto}}(n)|^2$$

is the square of the absolute value of the matched filter autocorrelation function, and the summation is calculated over the duration of the autocorrelation function (Fig. 3b).

To perform pulse compression the received signal,  $y_{\text{rx}}(n, u)$ , is convolved with a complex conjugated and time-reversed version of the matched filter signal, and here also normalized with the  $l^2$ -norm of the matched filter to maintain received signal power. The pulse compressed signal,  $y_{\text{pc}}(n, u)$ , then becomes

$$y_{\text{pc}}(n, u) = \frac{y_{\text{rx}}(n, u) * y_{\text{mf}}^*(-n)}{\|y_{\text{mf}}\|_2^2}, \quad (7)$$

189 The received power samples are then used to estimate target strength and volume backscat-  
 190 tering strength. For estimating received power samples, the average signal,  $y_{\text{pc}}(n)$ , over all  
 191 transducer sectors,  $N_u$ , is used:

$$y_{\text{pc}}(n) = \frac{1}{N_u} \sum_{u=1}^{N_u} y_{\text{pc}}(n, u). \quad (8)$$

192 Compensation of echo strength for position in the acoustic beam requires an estimate of  
 193 the echo arrival angle. This is obtained using the splitbeam method (Burdic, 1991), which for  
 194 broadband pules can be implemented with the angle values contained in the complex-valued  
 195  $y_{\text{pc}}(n)$  data, in combination with knowledge of transducer sector geometry. The principle  
 196 is demonstrated with a transducer that is divided into four quadrants (Fig. 4a). In this  
 197 example the summed signals from four halves (1+2, 2+3, 3+4, 4+1) are calculated as:

$$y_{\text{pc,fore}}(n) = \frac{1}{2} (y_{\text{pc}}(n, 3) + y_{\text{pc}}(n, 4)), \quad (9)$$

$$y_{\text{pc,aft}}(n) = \frac{1}{2} (y_{\text{pc}}(n, 1) + y_{\text{pc}}(n, 2)), \quad (10)$$

$$y_{\text{pc,star}}(n) = \frac{1}{2} (y_{\text{pc}}(n, 1) + y_{\text{pc}}(n, 4)), \quad (11)$$

$$y_{\text{pc,port}}(n) = \frac{1}{2} (y_{\text{pc}}(n, 2) + y_{\text{pc}}(n, 3)), \quad (12)$$

198 where fore, aft, star(board), and port indicate the relevant transducer halves. In scientific  
 199 echoshounder data fore-aft angles are often labelled alongship angles and port-starboard  
 200 angles athwartship angles.

## 201 F. Power and angle samples

202 The transceiver measures voltage over a load,  $z_{\text{rx,e}}$ , connected in series with the transducer  
 203 impedance,  $z_{\text{td,e}}$ . When calculating various acoustic properties, a system gain parameter will  
 204 be used which assumes a matched receiver load. The total received power,  $p_{\text{rx,e}}(n)$ , from all  
 205 transducer sectors for a matched receiver load (Fig. 4b) is given by:

$$p_{\text{rx,e}}(n) = N_u \left( \frac{|y_{\text{pc}}(n)|}{2\sqrt{2}} \right)^2 \left( \frac{|z_{\text{rx,e}} + z_{\text{td,e}}|}{z_{\text{rx,e}}} \right)^2 \frac{1}{|z_{\text{td,e}}|}. \quad (13)$$

206 Forward/aft and port/starboard phase angles of target echoes are estimated by combining  
 207 the transducer half signals thus:

$$y_{\theta}(n) = y_{\text{pc,fore}}(n) y_{\text{pc,aft}}^*(n), \quad (14)$$

$$y_{\phi}(n) = y_{\text{pc,star}}(n) y_{\text{pc,port}}^*(n), \quad (15)$$

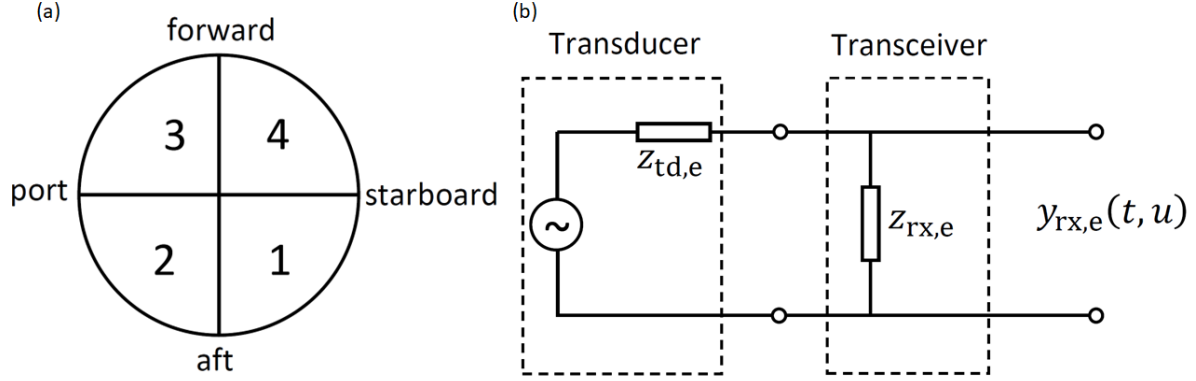


Figure 4. (a) Transducer divided into four quadrants. The labels are directions often used when a transducer is mounted on a ship. (b) Equivalent circuit diagram of transducer/transceiver with system impedances.

where  $y_\theta(n)$  is the electrical angle along the minor axis of the transducer (positive in the forward direction when ship-mounted) and  $y_\phi(n)$  the electrical angle along the major axis of the transducer (positive to starboard when ship-mounted). The physical echo arrival angles ( $\theta$  and  $\phi$ ) are then given by:

$$\theta(n) = \arcsin \left( \frac{\arctan2(\Im(y_\theta(n)), \Re(y_\theta(n)))}{\gamma_\theta} \right) \quad (16)$$

$$\phi(n) = \arcsin \left( \frac{\arctan2(\Im(y_\phi(n)), \Re(y_\phi(n)))}{\gamma_\phi} \right), \quad (17)$$

where  $\gamma_\theta$  and  $\gamma_\phi$  are constants that convert from phase angles to physical echo arrival angles (Fig. 5b) and are derived from the transducer geometry (Urick, 1983) and  $f_c$  the centre frequency of the chirp pulse (Ehrenberg, 1979). The inverse sine is indicated by  $\arcsin$ , the four quadrant inverse tangent which returns values in the interval  $[-\pi, \pi]$  inclusive is indicated by  $\arctan2$ , the real part of a complex number by  $\Re$  and the imaginary part by  $\Im$ . As a mnemonic, the horizontal line in the symbol used for the forward/aft direction,  $\theta$ , represents the pivot axis for the alongship angles and the near-vertical line in the  $\phi$  symbol indicates the pivot axis for port/starboard angles.

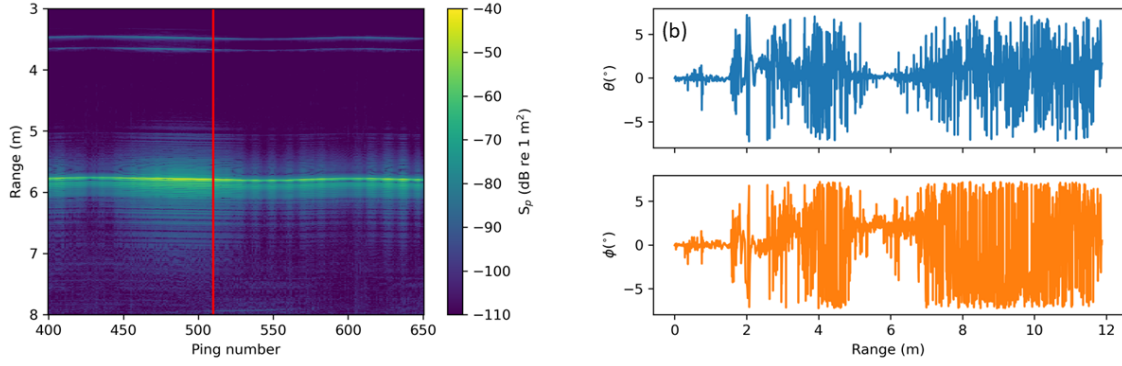


Figure 5. (a)  $S_p$  as a function of ping number and range for a calibration sphere. The sphere is located at approximately 5.8 m range. The red vertical line indicates the ping that is used for illustrating the  $TS(f)$  processing. (b) The physical angles  $\theta$  and  $\phi$  for the target strength example data (read vertical line in a). The single target can be seen around range 5.8 m where the angles are less variable.

### III. TARGET STRENGTH

To illustrate calculation of target strength ( $TS$ , dB re  $1\text{m}^2$ ) as a function of frequency,  $TS(f)$ , we use data collected on a 35 mm diameter tungsten carbide calibration sphere (WC35) suspended approximately 5.8 m below a 120 kHz transducer (Fig. 5a).

Echoes from single targets are often characterised by their  $TS$ , which is related to the differential backscattering cross section,  $\sigma_{bs}$ , via

$$TS = 10 \log_{10} \left( \frac{\sigma_{bs}}{r_0^2} \right), \quad (18)$$

where  $\log_{10}$  is the logarithm with base 10 and  $r_0$  is 1 m.

Generalizing the power-budget equation (i.e. sonar equation) for broadband signals (Lunde and Korneliussen, 2016) yields, in logarithmic form,  $TS$  at frequency  $f$ :

$$TS(f) = 10 \log_{10}(P_{rx,e,t}(f)) + 40 \log_{10}(r) + 2\alpha(f)r - 10 \log_{10} \left( \frac{p_{tx,e}\lambda^2(f)g^2(\theta_t, \phi_t, f)}{16\pi^2} \right), \quad (19)$$

where  $P_{rx,e,t}(f)$  is the Fourier transform of the received electric power in a matched load for a signal from a single target at frequency  $f$ ,  $r_t$  is the range to the target,  $\alpha(f)$  the acoustic absorption coefficient,  $p_{tx,e}$  the transmitted electric power,  $\lambda$  the acoustic wavelength, and  $g(\theta, \phi, f)$  the transducer gain incorporating both the on axis gain  $g_0(f) = g(0, 0, f)$  and the beam pattern based on the estimated target bearing  $(\theta_t, \phi_t)$ .

The point scattering strength (TS prior to target detection and beam pattern compensation),  $S_p(n)$ , is estimated by applying Eq. 19 to the received digitized power samples using the on-axis gain value and  $f$  set to the centre frequency of the broadband pulse,  $f_c$ :

$$S_p(n) = 10 \log_{10}(p_{\text{rx,e}}(n)) + 40 \log_{10}(r(n)) + 2\alpha(f_c)r(n) - 10 \log_{10} \left( \frac{p_{\text{tx,e}}\lambda^2(f_c)g_0^2(f_c)}{16\pi^2} \right), \quad (20)$$

noting that  $S_p(n)$  represents an average over the entire frequency band for all echoes received at sample  $n$ .

Based on the point scattering strength samples and the phase angle samples, single targets can be detected, and range and bearing to the single targets can be estimated. This is typically achieved through a single echo detection algorithm (SED, see e.g. Ona (1999)). Here we will assume that the samples from the pulse compressed data  $y_{\text{pc}}(n)$  originating from single target already have been identified, noting that the number of samples after the detected target may be higher than those before the peak to include scattering processes that occur in actual targets (as opposed to ideal point targets). The alongship angle  $\theta(n)$ , athwartship angle  $\phi(n)$  and sample number  $n$  at the *peak* power  $p_{\text{rx,e}}(n)$  within the detected target are used as estimates for  $\theta_t$ ,  $\phi_t$  and  $r_t$ , respectively (Fig. 5b). A simple pseudo SED algorithm, simply using a threshold, is implemented in the code for illustrative purposes.

From the autocorrelation function of the matched filter signal,  $y_{\text{mf,auto}}(n)$ , the equivalent number of samples around the peak (to that used for the target signal) are extracted to create the reduced autocorrelation signal of the matched filter signal,  $y_{\text{mf,auto,red}}(n)$  (Fig. 6). Depending on the target scattering characteristics and the distance to any adjacent single targets, the number of samples around the peak echo level in  $y_{\text{pc,t}}(n)$  that contain the majority of the echo energy can be more or less than the total number of samples around the peak of  $y_{\text{mf,auto}}(n)$ . If the number of samples around the target is more than the total number of samples around the peak of  $y_{\text{mf,auto}}(n)$  all samples around the peak of  $y_{\text{mf,auto}}(n)$  are used. If the number of samples around the target is less than the total number of samples around the peak of  $y_{\text{mf,auto}}(n)$ , this lower number is used to create  $y_{\text{mf,auto,red}}(n)$ .

The discrete Fourier transforms of the target signal,  $Y_{\text{pc,t}}(m)$ , and the reduced autocorrelation signal,  $Y_{\text{mf,auto,red}}(m)$ , are given by:

$$Y_{\text{pc,t}}(m) = \text{DFT}_{N_{\text{DFT}}}(y_{\text{pc,t}}(n)), \quad (21)$$

$$Y_{\text{mf,auto,red}}(m) = \text{DFT}_{N_{\text{DFT}}}(y_{\text{mf,auto,red}}(n)), \quad (22)$$

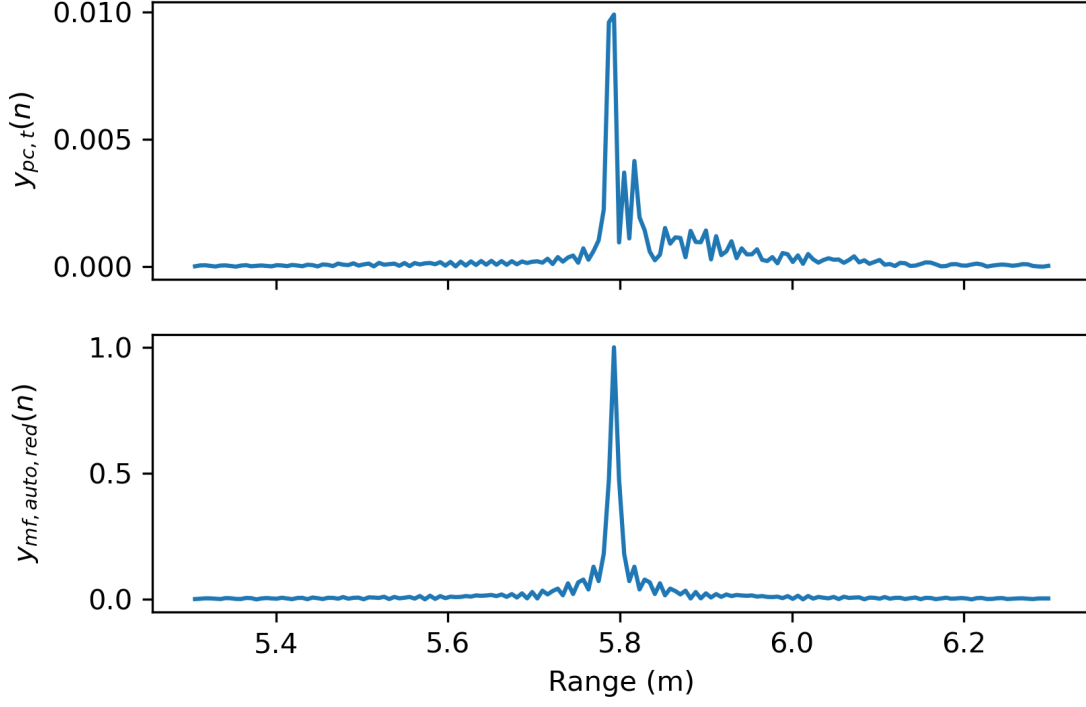


Figure 6.  $y_{pc,t}(n)$  (upper figure) and  $y_{mf,auto,red}(n)$  (lower figure).  $y_{mf,auto,red}(n)$  is the autocorrelation function of the transmit signal reduced to the length of the target signal and aligned with the peak power of the target. The corresponding split beam angles ( $\theta_t$  and  $\phi_t$ ) for the single target are shown in (Fig. 5b).

where DFT indicates the Fourier transform of length  $N_{\text{DFT}}$  and  $m$  the sample index in the frequency domain. The normalized discrete Fourier transform of the target signal,  $\tilde{Y}_{pc,t}(m)$ , (Fig. 7) is then calculated by:

$$\tilde{Y}_{pc,t}(m) = \frac{Y_{pc,t}(m)}{Y_{mf,auto,red}(m)}. \quad (23)$$

Assuming, as a first approximation, that the impedances of the transceiver and transducer are independent of frequency, the received power into a matched load,  $P_{rx,e,t}(m)$ , is then estimated by:

$$P_{rx,e,t}(m) = N_u \left( \frac{|\tilde{Y}_{pc,t}(m)|}{2\sqrt{2}} \right)^2 \left( \frac{|z_{rx,e} + z_{td,e}|}{|z_{rx,e}|} \right)^2 \frac{1}{|z_{td,e}|}, \quad (24)$$

noting that potential significant variation of impedance with frequency will be accounted for in the  $g_0$  obtained from the calibration process.

Target strength can then be estimated using Eq. 19:

$$TS(f) = 10 \log_{10}(P_{rx,e,t}(m)) + 40 \log_{10}(r_t) + 2\alpha(f)r_t - 10 \log_{10} \left( \frac{p_{tx,e}\lambda^2(f)g^2(\theta_t, \phi_t, f)}{16\pi^2} \right) \quad (25)$$

where the sample index  $m$  corresponding to frequency  $f$  can be estimated using

$$m = \lfloor \frac{f}{f_{s,dec}} N_{DFT} \rfloor \quad (26)$$

where  $\lfloor \rfloor$  represents modulus. A frequency modulated pulse scattered by a metallic sphere will exhibit frequencies at which very little energy is returned due to destructive interference (Stanton and Chu, 2008). This is visible in the estimated TS (Fig. 7) and agrees well with theoretical estimates of the backscatter from spheres (MacLennan, 1981).

#### IV. VOLUME BACKSCATTERING STRENGTH

To illustrate calculation of volume backscattering strength as a function of frequency,  $S_v(f)$  (dB re  $1\text{m}^{-1}$ ), we use data collected from a school of non-swimbladdered fish (Fig. 8) collected with a 120 kHz centre frequency transducer.

Echoes from multiple scatterers can be quantified using volume backscattering strength,  $S_v$ , being the density of backscattering cross sections, and is given by:

$$S_v = 10 \log_{10} \frac{\sum \sigma_{bs}}{V}. \quad (27)$$

where  $V$  is the ensonified volume occupied by the scattering targets. The power-budget equation for multiple targets is then:

$$S_v(f) = 10 \log_{10}(P_{rx,e,v}(f)) + 20 \log_{10}(r_c) + 2\alpha(f)r_c - 10 \log_{10} \left( \frac{p_{tx,e}\lambda^2(f)ct_w\psi(f)g_0^2(f)}{32\pi^2} \right), \quad (28)$$

where  $P_{rx,e,v}(f)$  is the received electric power in a matched load for the signal from a volume at frequency  $f$ ,  $c$  the sound speed,  $t_w$  the duration of the time window, excluding the zero-padded portion if applied, used for evaluating the frequency spectrum,  $r_c$  is the range to the centre of the range volume covered by  $t_w$ , and  $\psi(f)$  is the two-way equivalent beam angle. The two-way equivalent beam angle is a function of frequency that is derived from an empirical estimate of  $\psi$  at the nominal frequency,  $f_n$ :

$$\psi(f) = \psi(f_n) \left( \frac{f_n}{f} \right)^2. \quad (29)$$

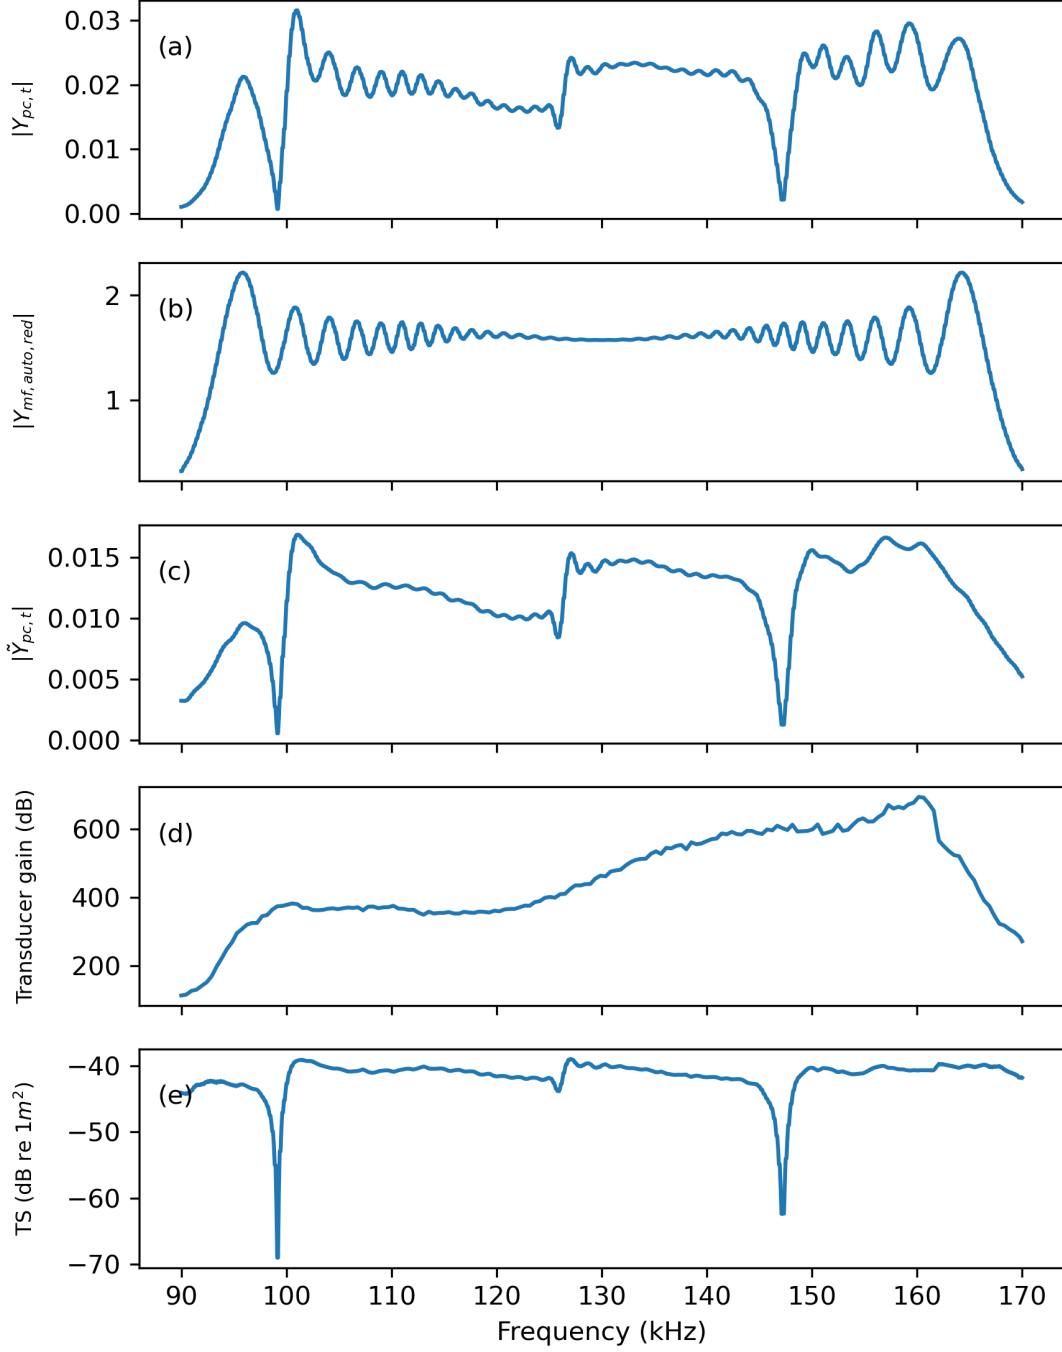


Figure 7. (a) The discrete Fourier transform of the target signal  $Y_{pc,t}(m)$ , (b) and the reduced auto correlation signal  $Y_{mf,auto,red}(m)$ , (c) the normalized discrete Fourier transform of the target signal  $\tilde{Y}_{pc,t}(m)$ , (d) transducer gain ( $10 \log_{10} g^2(\theta_t, \phi_t, f)$ ), and (e) the estimated TS(f).



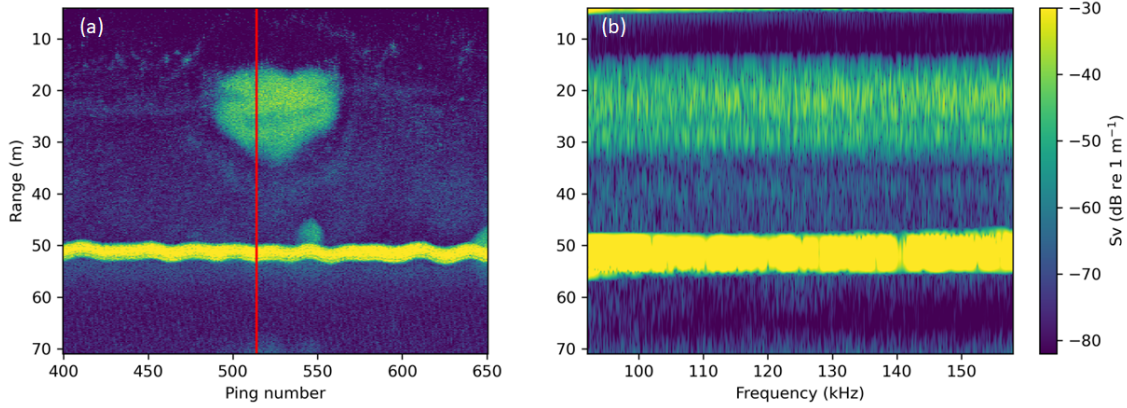


Figure 8. Illustration of volume backscattering strength as a function of frequency,  $S_v(f)$ . A non-swimbladdered fish school is seen as a registration between 15 and 35 m range, and the sea floor is seen at approximately 50 m. (a)  $S_v$  as a function of ping number and range for the raw data file used in the  $S_v(f)$  example. The red vertical line indicates the ping that is used for illustrating the  $S_v(f)$  processing used in (b). (b)  $S_v(f)$  as a function of frequency and range for a single ping indicated in (a) with a vertical red line. In this example the decimated sampling rate ( $f_{s,dec}$ , Eq. 2) is 93.75 kHz, the nominal pulse duration ( $\tau$ ) is 2 ms, and the effective pulse duration ( $\tau_{eff}$ , Eq. 6) is 0.02 ms.

Volume backscattering samples compressed over the operational frequency band are estimated by applying Eq. 28 to the received digitized power samples using the on-axis gain value with  $f$  set to the centre frequency of the broadband pulse,  $f_c$ :

$$S_v(n) = 10 \log_{10}(p_{rx,e}(n)) + 20 \log_{10}(r_c(n)) + 2\alpha(f_c)r_c(n) - 10 \log_{10} \left( \frac{p_{tx,e}\lambda^2(f_c)c\tau_{eff}\psi(f_c)g_0^2(f_c)}{32\pi^2} \right). \quad (30)$$

Compensation of spherical spreading loss requires compensation of received power by a factor of  $r_c^2$ , and hence compensation of amplitude by a factor of  $r_c$ :

$$y_{pc,s}(n) = y_{pc}(n)r_c(n). \quad (31)$$

where  $y_{pc,s}(n)$  is the pulse compressed signal compensated for spherical spreading. A discrete Fourier transform is performed on the range compensated pulse compressed sample data using a normalized sliding Hann window,  $w(i)$ . The duration,  $t_w$ , of the sliding window is chosen as a compromise between along-beam range resolution and frequency resolution. We

301 suggest that it be at least twice the pulse duration and for computational efficiency reasons  
 302 should result in a number of samples,  $N_w$ , which is a power of 2.

303 The normalised Hann window,  $\tilde{w}$ , is given by:

$$\tilde{w}(i) = \frac{w(i)}{\left(\frac{\|w\|_2}{\sqrt{N_w}}\right)}, i = \frac{-N_w}{2}, \dots, \frac{N_w}{2} \quad (32)$$

304 and the discrete Fourier transform of the windowed data,  $Y_{\text{pc,v}}(m)$ , is then obtained from:

$$Y_{\text{pc,v}}(m) = \text{DFT}_{N_{\text{DFT}}} \left( \tilde{w}(i) \left( y_{\text{pc,s}}(i+n) \left[ u(i + \frac{N_w}{2}) - u(i - \frac{N_w}{2}) \right] \right) \right), \quad (33)$$

305 where  $u(i)$  is the step function and  $n$  is the sample data index for the centre of the sliding  
 306 window. The discrete Fourier transform of the auto correlation function of the matched  
 307 filter signal,  $Y_{\text{mf,auto}}(m)$ , also needs to be evaluated at the same frequencies:

$$Y_{\text{mf,auto}}(m) = \text{DFT}_{N_{\text{DFT}}}(y_{\text{mf,auto}}(n)). \quad (34)$$

308 The normalized discrete Fourier transform of the windowed data,  $\tilde{Y}_{\text{pc,v}}(m)$ , is then given  
 309 by:

$$\tilde{Y}_{\text{pc,v}}(m) = \frac{Y_{\text{pc,v}}(m)}{Y_{\text{mf,auto}}(m)}, \quad (35)$$

310 and received power into a matched load,  $P_{\text{rx,e,v}}(m)$ , is estimated from:

$$P_{\text{rx,e,v}}(m) = N_u \left( \frac{|\tilde{Y}_{\text{pc,v}}(m)|}{2\sqrt{2}} \right)^2 \left( \frac{|z_{\text{rx,e}} + z_{\text{td,e}}|}{|z_{\text{rx,e}}|} \right)^2 \frac{1}{|z_{\text{td,e}}|}. \quad (36)$$

311 Finally, the discretized estimate of  $S_v(f)$ ,  $S_v(m)$ , is given by:

$$S_v(f) = 10 \log_{10}(P_{\text{rx,e,v}}(m)) + 2\alpha(f)r_c - 10 \log_{10} \left( \frac{p_{\text{tx,e}}\lambda^2(f)ct_w\psi(f)g_0^2(f)}{32\pi^2} \right). \quad (37)$$

312 where the sample index  $m$  corresponding to frequency  $f$  can be estimated using Eq. 26.

313 By selecting a set of centre samples  $t$ ,  $S_v$  values can be presented as a function of range  
 314 ( $n$ ) and frequency ( $f$ ) for each ping. The range for centre samples  $n$  could be chosen as half  
 315 the window length or any other grid that the user prefer the data presented to be in. This  
 316 can be useful when combining the  $S_v(f)$  across a range of transducers. In our example we  
 317 have simply chosen the set of centre samples as the original range samples (Fig. 8).

318 For acoustic abundance estimation and classification purposes it is common to integrate  
 319  $S_v$  over a range (15 to 34 m in the example, covering a school of non-swimbladder fish,  
 320 Fig. 8). It is normal to average  $S_v$  over several pings to obtain an unbiased estimate, but

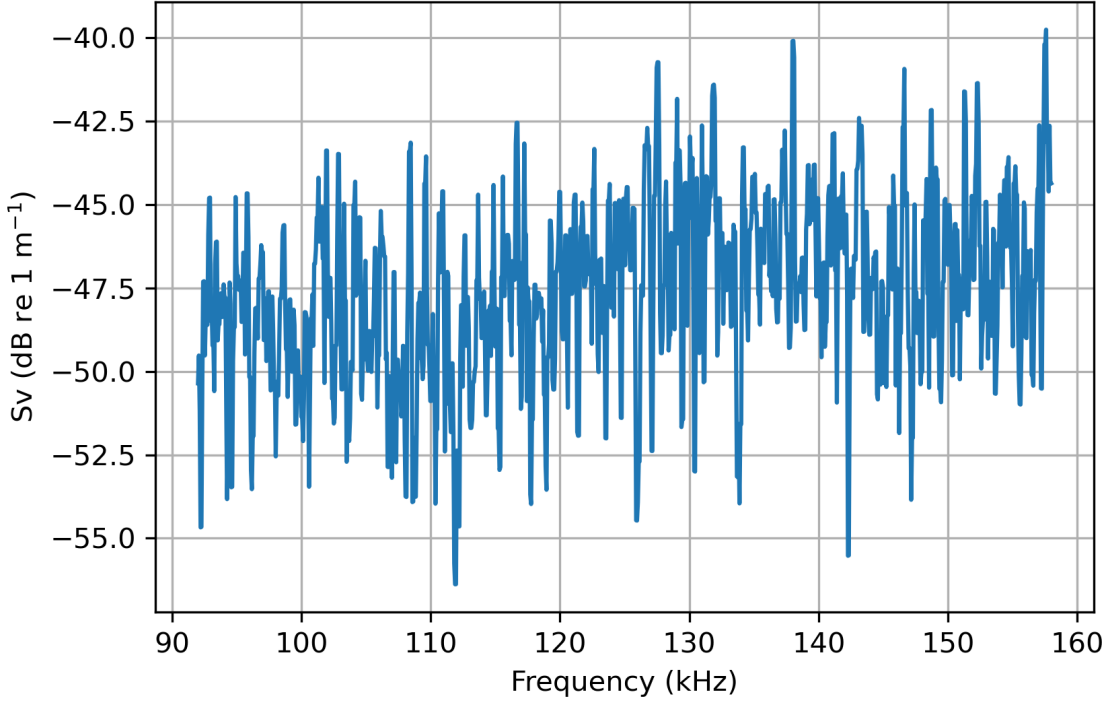


Figure 9.  $S_v$  of the single ping marked in Fig. 8a as a function of frequency averaged over a depth interval covering a fish school. A weak positive slope is observed of the frequency response.

here just one ping is used for illustrative purposes (Fig. 9). Even though this is for a single ping it is still possible to observe a positive slope of the frequency response that is indicative of non-swimbladder fish.

The trend for increasing  $S_v$  with frequency is well-known for fish without swimbladder (Korneliussen, 2010) and is consistent with the trend observed in this example. In contrast to data from isolated scatterers, such as metallic spheres, the benefit of pulse compression on the backscatter from an object that generates many overlapping echoes is not immediately obvious (Fig. 9).

## V. DISCUSSION

The use of broadband signals in fisheries acoustics is a developing field, and our contribution represents a comprehensive description of the data processing steps. The contribution includes all steps well founded in the literature as well as any practical and more ad-hoc

choices. The choices include handling of gaps in the calibration data, the choice of transmit pulse including tapering, calculation of efficient pulse duration, and decimation factors and filtering. When convolving the received signal with the transmit pulse, there are various approaches to handle edge cases (e.g. distorted output at the beginning and end of the section of filtered data) and in our implementation we chose to exclude these. We have also assumed a four-sector transducer, and the code must be adapted to other beam configurations if other configurations are needed. When estimating  $TS(f)$  and  $S_v(f)$  the resolution and accuracy will depend on the length,  $N_{\text{DFT}}$ , of the Fourier transform and the actual choice will be a compromise between accuracy and computational speed. Our objective is not to provide an evaluation of all these choices, but to document the baseline for the processing that can be used for benchmarking purposes.

$TS(f)$  is a common metric for studying single targets, used to extract features for single individuals. Features includes size, target classification and, behaviour through tracking. In our implementation, calculation of  $TS(f)$  assumes that a single target has successfully been identified. This requires a robust single target detector. Several SED algorithms exist and different algorithms may be required depending on the situation. Typical SED algorithms are based on traditional single frequency pulses and by utilizing the additional information in broadband echoes improved SEDs may be envisioned, but this is outside the scope of this paper.

$S_v(f)$  is a key parameter for echo integration. To estimate  $S_v(f)$  a Fourier transform is used, repeatedly applied via a sliding window in range. The chosen size of the window is two times the pulse length, and is a compromise between spatial and frequency resolution. Since the duration of the sliding window can cause the spreading loss compensation to differ between the beginning and end of the window, the compensation for spreading loss is performed on the pulse compressed time domain data before the transform. Absorption loss compensation is also range dependent (and frequency dependent), but is insignificant for the operating frequencies for typical marine ecosystem echosounder for short range windows. The compensation for absorption loss is therefore performed after applying the discrete Fourier transform. The choice of window also allows the data to be split onto a predefined range-frequency grid, which can then be used to fit data across transducers to an n-dimensional tensor typically employed by deep learning methods (Brautaset *et al.*, 2020, e.g.).

The formulation presented in this paper requires several frequency dependent parameters, such as transducer gain, two-way equivalent beam angle, and the water absorption

coefficient, to quantitatively estimate  $TS(f)$  and  $S_v(f)$ . Methods to estimate these are not within the scope of this paper, but common practice is to use the conventional sphere backscatter calibration methodology (Demer *et al.*, 2015) slightly enhanced for broadband (Hobæk and Forland, 2013; Lavery *et al.*, 2017). We note that these methods do not provide an operational method to estimate  $\tau_{\text{eff}}$  or  $\psi(f)$ , especially for ship-mounted transducers, and that empirical measurements of these parameters are necessary to fully calibrate both narrowband and broadband echosounders.

A set of equations and associated computer code for calculating calibrated, frequency-dependent, target strength and volume backscatter from broadband echosounder signals have been presented along with example code, providing a resource for those interested in learning and further developing broadband processing techniques. The processing equations and methodology presented in this paper are similar to those implements in version 1.12.4 and earlier of the Simrad EK80 software.

## VI. CONCLUSION

A set of equations for calculating calibrated, frequency-dependent, target strength and volume backscatter from broadband echosounder signals have been presented along with example code, with reference to the Simrad EK80 echosounder.

## VII. DATA AVAILABILITY STATEMENT

The code and data associated with this article are available through GitHub through <https://github.com/CRIMAC-WP4-Machine-learning/CRIMAC-Raw-To-Svf-TSf>. The raw data files are available at <https://zenodo.org/record/8318274>. The code and data for the pre-print is tagged version 0.95. The version for the printed paper is 1.0. Further developments will have higher version numbers.

Barr, R., Coombs, R., Doonan, I., and McMillian, P. (2002). “Target identification of oreos and associated species,” Final Research Report for the Ministry of Fisheries Research Project OEO2000/01B, Objective 1 , [fs.fish.govt.nz/Page.aspx?pk=113&dk=22653](https://fs.fish.govt.nz/Page.aspx?pk=113&dk=22653), (Last viewed October 21, 2019).

- Bassett, C., De Robertis, A., and Wilson, C. D. (2018). “Broadband echosounder measurements of the frequency response of fishes and euphausiids in the Gulf of Alaska,” ICES Journal of Marine Science **75**(3), 1131–1142, doi: [10.1093/icesjms/fsx204](https://doi.org/10.1093/icesjms/fsx204).
- Benoit-Bird, K. J., and Waluk, C. M. (2020). “Exploring the promise of broadband fisheries echosounders for species discrimination with quantitative assessment of data processing effects,” The Journal of the Acoustical Society of America **147**(1), 411–427, doi: [10.1121/10.0000594](https://doi.org/10.1121/10.0000594) publisher: Acoustical Society of America.
- Blanluet, A., Doray, M., Berger, L., Romagnan, J.-B., Bouffant, N. L., Lehuta, S., and Petitgas, P. (2019). “Characterization of sound scattering layers in the Bay of Biscay using broadband acoustics, nets and video,” PLOS ONE **14**(10), e0223618, doi: [10.1371/journal.pone.0223618](https://doi.org/10.1371/journal.pone.0223618) publisher: Public Library of Science.
- Brautaset, O., Waldeland, A. U., Johnsen, E., Malde, K., Eikvil, L., Salberg, A.-B., and Handegard, N. O. (2020). “Acoustic classification in multifrequency echosounder data using deep convolutional neural networks,” ICES Journal of Marine Science **77**(4), 1391–1400, <https://academic.oup.com/icesjms/advance-article/doi/10.1093/icesjms/fsz235/5712978>, doi: [10.1093/icesjms/fsz235](https://doi.org/10.1093/icesjms/fsz235).
- Briseño-Avena, C., Roberts, P. L. D., Franks, P. J. S., and Jaffe, J. S. (2015). “ZOOPS-O<sup>2</sup>: A broadband echosounder with coordinated stereo optical imaging for observing plankton in situ,” Methods in Oceanography **12**, 36–54, doi: [10.1016/j.mio.2015.07.001](https://doi.org/10.1016/j.mio.2015.07.001).
- Burdic, W. S. (1991). *Underwater Acoustic System Analysis* (Prentice Hall).
- Chu, D., and Stanton, T. (1998). “Application of pulse compression techniques to broadband acoustic scattering by live individual zooplankton,” The Journal of the Acoustical Society of America **104**(1), 39–55, doi: [10.1121/1.424056](https://doi.org/10.1121/1.424056).
- Chu, D., Stanton, T., and Wiebe, P. (1992). “Frequency dependence of sound backscattering from live individual zooplankton,” ICES Journal of Marine Science **49**(1), 97–106, doi: [10.1093/icesjms/49.1.97](https://doi.org/10.1093/icesjms/49.1.97).
- Conti, S. G., and Demer, D. A. (2003). “Wide-bandwidth acoustical characterization of anchovy and sardine from reverberation measurements in an echoic tank,” ICES Journal of Marine Science **60**(3), 617–624, doi: [10.1016/S1054-3139\(03\)00056-0](https://doi.org/10.1016/S1054-3139(03)00056-0).
- Cook, C., and Bernfield, M. (1967). *Radar Signals: An Introduction to Theory and Application* (Academic Press, Inc.).
- Crochiere, R. E., and Rabiner, L. R. (1983). *Multirate Digital Signal Processing*, 1st ed. ed. (PrenticeHall Inc., Englewood Cliffs, New Jersey).

- De Robertis, A., Levine, M., Lauffenburger, N., Honkalehto, T., Lanelli, J. N., Monnahan, C. C., Towler, R., Jones, D., Stienessen, S., and McKelvey, D. R. (2021). “Uncrewed surface vehicle (USV) survey of walleye pollock, *Gadus chalcogrammus*, in response to the cancellation of ship-based surveys,” ICES Journal of Marine Science **78**(8), 2797–2808, <https://academic.oup.com/icesjms/article/78/8/2797/6356484>, doi: [10.1093/icesjms/fsab155](https://doi.org/10.1093/icesjms/fsab155).
- Demer, D., Andersen, L. N., Bassett, C., Chu, D., Condiotty, J., Cutter, G. R., Hutton, B., Korneliussen, R., Le Bouffant, N., Macaulay, G. J., Michaels, W. L., Murfin, D. W., Pobitzer, A., Renfree, J. S., Sessions, T. S., Stierhoff, K., and Thompson, C. H. (2017). “2016 USA–Norway EK80 Workshop Report: Evaluation of a wideband echosounder for fisheries and marine ecosystem science,” ICES Cooperative Research Report No. 336 , doi: <http://doi.org/10.17895/ices.pub.2318>.
- Demer, D. A., Berger, L., Bernasconi, M., Boswell, K. M., Chu, D., Domokos, R., Dunford, A. J., Fässler, S. M. M., Gauthier, S., Hufnagle, L. T., Jech, J. M., Bouffant, N., Lebourges-Dhaussy, A., Lurton, X., Macaulay, G. J., Perrot, Y., Ryan, T. E., Parker-Stetter, S., Stienessen, S., Weber, T. C., and Williamson, N. J. (2015). “Calibration of acoustic instruments,” ICES Cooperative Research Report No. 326 , doi: [10.17895/ices.pub.5494](https://doi.org/10.17895/ices.pub.5494).
- Denny, G., and Simpson, P. (1998). “A broadband acoustic fish identification system,” The Journal of the Acoustical Society of America **103**(5), 3069–3069, doi: [10.1121/1.422851](https://doi.org/10.1121/1.422851).
- Ehrenberg, J. E. (1979). “A comparative analysis of *in situ* methods for directly measuring the acoustic target strength of individual fish,” IEEE Journal of Oceanic Engineering **4**(4), 141–152, doi: [10.1109/JOE.1979.1145434](https://doi.org/10.1109/JOE.1979.1145434).
- Ehrenberg, J. E., and Torkelson, T. C. (2000). “FM slide (chirp) signals: A technique for significantly improving the signal-to-noise performance in hydroacoustics assessment systems,” Fisheries Research **47**, 193–199, doi: [10.1016/S0165-7836\(00\)00169-7](https://doi.org/10.1016/S0165-7836(00)00169-7).
- Fernandes, P. G., Stevenson, P., Brierley, A. S., Armstrong, F., and Simmonds, E. (2003). “Autonomous underwater vehicles: future platforms for fisheries acoustics,” ICES Journal of Marine Science **60**(3), 684–691, doi: [10.1016/s1054-3139\(03\)00038-9](https://doi.org/10.1016/s1054-3139(03)00038-9).
- Foote, K. G., Atkins, P. R., Francis, D. T. I., and Knutsen, T. (2005). “Measuring echo spectra of marine organisms over a wide bandwidth,” in *Proceedings of the International Conference on Underwater Acoustic Measurements: Technologies and Results*, Heraklion, Crete.



- Forland, T. N., Hobæk, H., and Korneliussen, R. J. (2014). “Scattering properties of Atlantic mackerel over a wide frequency range,” *ICES Journal of Marine Science* **71**(7), 1904–1912, doi: [10.1093/icesjms/fsu045](https://doi.org/10.1093/icesjms/fsu045).
- Ghatak, A. (2017). *Machine Learning with R*, 1st ed. ed. (Springer Nature Singapore).
- Godø, O. R., Handegard, N. O., Browman, H. I., Macaulay, G. J., Kaartvedt, S., Giske, J., Ona, E., Huse, G., and Johnsen, E. (2014). “Marine ecosystem acoustics (MEA): quantifying processes in the sea at the spatio-temporal scales on which they occur,” *ICES Journal of Marine Science* **71**(8), 2357–2369, <http://icesjms.oxfordjournals.org/content/early/2014/07/22/icesjms.fsu116>, doi: [10.1093/icesjms/fsu116](https://doi.org/10.1093/icesjms/fsu116).
- Gordon, L., and Zedel, L. (1998). “FishMASS: what can you do with a little bandwidth when you are watching fish?,” *IEEE Seminar Digests* **1998**(227), 7, doi: [10.1049/ic:19980186](https://doi.org/10.1049/ic:19980186).
- Hasegawa, K., Yan, N., and Mukai, T. (2021). “In situ broadband acoustic measurements of age-0 walleye pollock and pointhead flounder in Funka Bay, Hokkaido, Japan,” *Journal of Marine Science and Technology* **29**(2), doi: [10.51400/2709-6998.1076](https://doi.org/10.51400/2709-6998.1076).
- Hobæk, H., and Forland, T. N. (2013). “Characterization of Target Spheres for Broad-Band Calibration of Acoustic Systems,” *Acta Acustica united with Acustica* **99**(3), 465–476, doi: [10.3813/AAA.918627](https://doi.org/10.3813/AAA.918627).
- Imaizumi, T., Abe, K., Sawada, K., Matsuda, A., Akamatsu, T., Suga, T., Wang, Y., Nishimori, Y., Ogawa, S., Matsuo, I., and Ito, M. (2009). “Detection of in situ fish using broadband split-beam system,” *Institute of Electronics, Information, and Communication Engineers, Tech. Rep. IEICE-US2009-36* **109**(180), 39–42.
- Klauder, J. R., Price, A. C., Darlington, S., and Albersheim, W. J. (1960). “The theory and design of chirp radars,” *The Bell System Technical Journal* **39**(4), 745–808, doi: [10.1002/j.1538-7305.1960.tb03942.x](https://doi.org/10.1002/j.1538-7305.1960.tb03942.x).
- Korneliussen, R. J. (2010). “The acoustic identification of Atlantic mackerel,” *ICES Journal of Marine Science* doi: [10.1093/icesjms/fsq052](https://doi.org/10.1093/icesjms/fsq052).
- Korneliussen, R. J., Berger, L., Campanlla, F., Dezhang, C., Demer, D., De Robertis, A., Domokos, R., Doray, M., Fielding, S., Fässler, S. M. M., Gauthier, S., Gastauer, S., Horne, J., Hutton, B., Iriarte, F., Jech, J. M., Kloser, R., Lawson, G., Lebourges-Dhaussy, A., McQuinn, I., Peña, M., Scoulding, B., Sakinan, S., Schaber, M., Taylor, J. C., and Thompson, C. H. (2018). “Target classification,” *ICES Cooperative Research Report No. 344*, doi: [doi.org/10.17895/ices.pub.4567](https://doi.org/doi.org/10.17895/ices.pub.4567).
- Kubilius, R., Macaulay, G. J., and Ona, E. (2020). “Remote sizing of fish-like targets using broadband acoustics,” *Fisheries Research* **228**, 105568, doi: [10.1016/j.fishres.2020.105568](https://doi.org/10.1016/j.fishres.2020.105568).



05568.

- Lavery, A. C., Bassett, C., Lawson, G. L., and Jech, J. M. (2017). “Exploiting signal processing approaches for broadband echosounders,” ICES Journal of Marine Science **74**(8), 2262–2275, doi: [10.1093/icesjms/fsx155](https://doi.org/10.1093/icesjms/fsx155).
- Lavery, A. C., Chu, D., and Moum, J. N. (2010). “Measurements of acoustic scattering from zooplankton and oceanic microstructure using a broadband echosounder,” ICES Journal of Marine Science **67**(2), 379–394, doi: [10.1093/icesjms/fsp242](https://doi.org/10.1093/icesjms/fsp242).
- Lunde, P., and Korneliussen, R. J. (2016). “Power-Budget Equations and Calibration Factors for Fish Abundance Estimation Using Scientific Echo Sounder and Sonar Systems,” Journal of Marine Science and Engineering **4**(3), 43, doi: [10.3390/jmse4030043](https://doi.org/10.3390/jmse4030043).
- MacLennan, D. N. (1981). “The Theory of Solid Spheres as Sonar Calibration Targets,” Scottish Fisheries Research Report Number 22 .
- MacLennan, D. N., Fernandes, P., and Dalen, J. (2002). “A consistent approach to definitions and symbols in fisheries acoustics,” ICES Journal of Marine Science **59**, 365–369, doi: [10.1006/jmsc.2001.1158](https://doi.org/10.1006/jmsc.2001.1158).
- Ona, E. (1999). “Methodology for target strength measurements (with special reference to in situ techniques for fish and micro-nekton,” ICES Cooperative Research Report No. 235 .
- Padgett, W., and Anderson, D. (2022). *Fixed-point Signal Processing*, 5th ed. ed. (Springer International Publishing).
- Proakis, J. H., and Manolakis, D. G. (2007). *Digital Signal Processing, Principles, Algorithms, and Applications*, 4th ed. ed. (Prentice Hall Inc., New York).
- Simmonds, E. J., Armstrong, F., and Copland, P. J. (1996). “Species identification using wideband backscatter with neural network and discriminant analysis,” ICES Journal of Marine Science **53**(2), 189–195, doi: [10.1006/jmsc.1996.0021](https://doi.org/10.1006/jmsc.1996.0021).
- Simmonds, J., and MacLennan, D. (2005). *Fisheries Acoustics. Theory and Practice*, 2nd ed. ed. (Blackwell Science, Oxford).
- Stanton, T. K., and Chu, D. (2008). “Calibration of broadband active acoustic systems using a single standard spherical target,” The Journal of the Acoustical Society of America **124**(1), 128–136, doi: [10.1121/1.2917387](https://doi.org/10.1121/1.2917387).
- Stanton, T. K., Chu, D., Jech, J. M., and Irish, J. D. (2010). “New broadband methods for resonance classification and high-resolution imagery of fish with swimbladders using a modified commercial broadband echosounder,” ICES Journal of Marine Science **67**(2), 365–378, doi: [10.1093/icesjms/fsp262](https://doi.org/10.1093/icesjms/fsp262).

- Stanton, T. K., Sellers, C. J., and Jech, J. M. (2012). “Resonance classification of mixed assemblages of fish with swimbladders using a modified commercial broadband acoustic echosounder at 1–6 kHz,” *Canadian Journal of Fisheries and Aquatic Sciences* **69**(5), 854–868, doi: [10.1139/f2012-013](https://doi.org/10.1139/f2012-013).
- Sund, O. (1935). “Echo Sounding in Fishery Research,” *Nature* **135**(3423), 953–953, <http://www.nature.com/articles/135953a0>, doi: [10.1038/135953a0](https://doi.org/10.1038/135953a0).
- Turin, G. (1960). “An introduction to matched filters,” *IRE Transactions on Information Theory* **6**(3), 311–329, doi: [10.1109/TIT.1960.1057571](https://doi.org/10.1109/TIT.1960.1057571).
- Urick, R. (1983). *Principles of Underwater Sound*, 3rd ed. ed. (McGraw-Hill Book Company, New York).
- Zakharia, M., Corgiatti, J., Joly, F., and Person, R. (1989). “Wide-band sounder for fisheries,” *Proceedings of the Institute of Acoustics* **11**, 274–281.
- Zakharia, M. E., Magand, F., Hetroit, F., and Diner, N. (1996). “Wideband sounder for fish species identification at sea,” *ICES Journal of Marine Science* **53**, 203–208, doi: [10.1006/jmsc.1996.0023](https://doi.org/10.1006/jmsc.1996.0023).
- Zedel, L., Knutsen, T., and Patro, R. (2003). “Acoustic Doppler current profiler observations of herring movement,” *ICES Journal of Marine Science* **60**(4), 846–859, doi: [10.1016/s1054-3139\(03\)00067-5](https://doi.org/10.1016/s1054-3139(03)00067-5).