
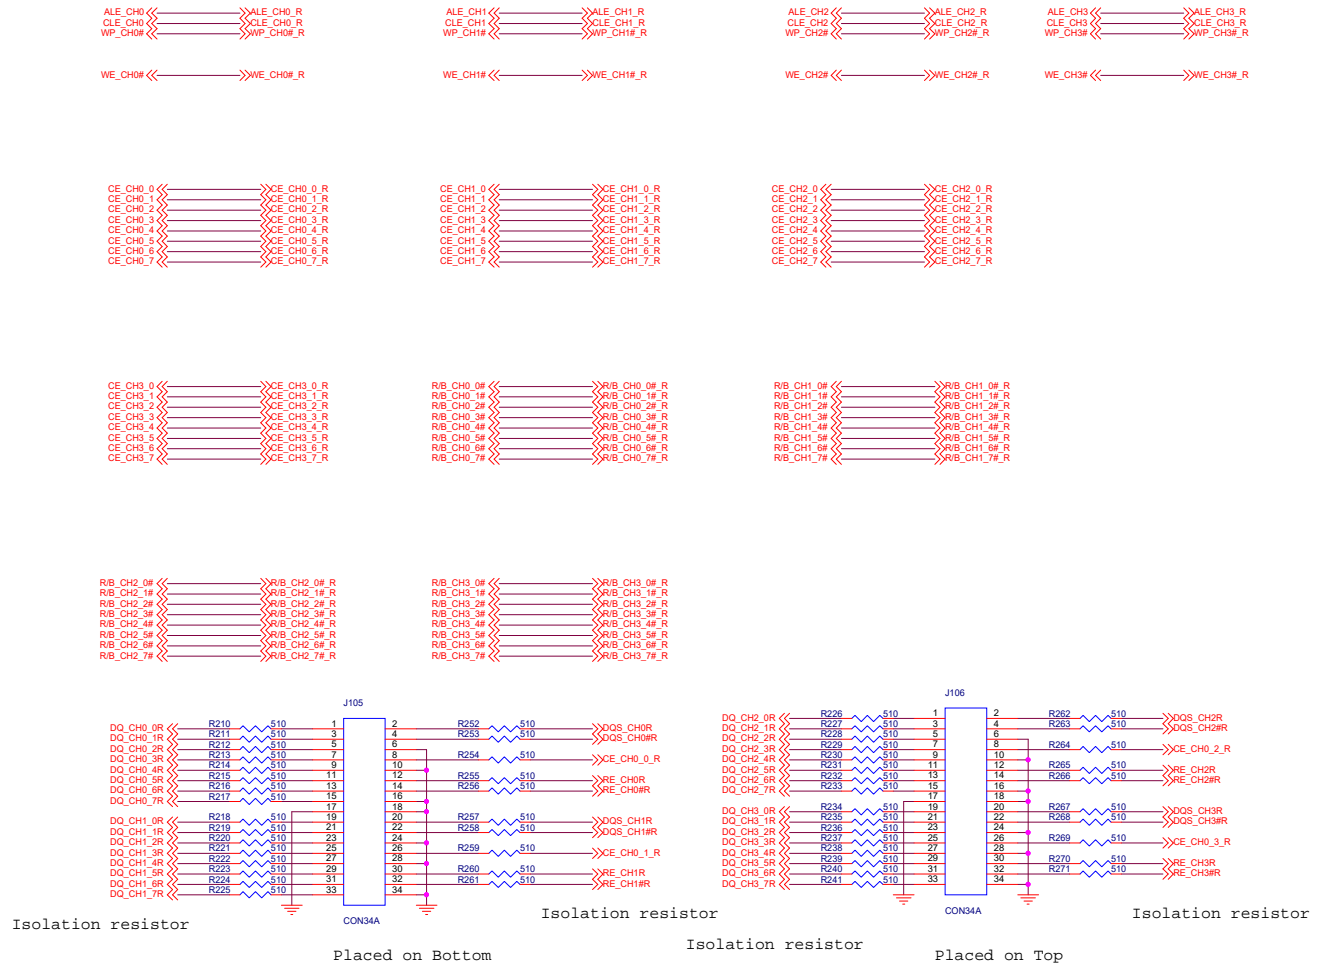


All signal lengths must be same!!
Line impedance: 50Ω



Damping Resistor Placement Rule

-SO-DIMM 커넥터 근처에 위치 할 것

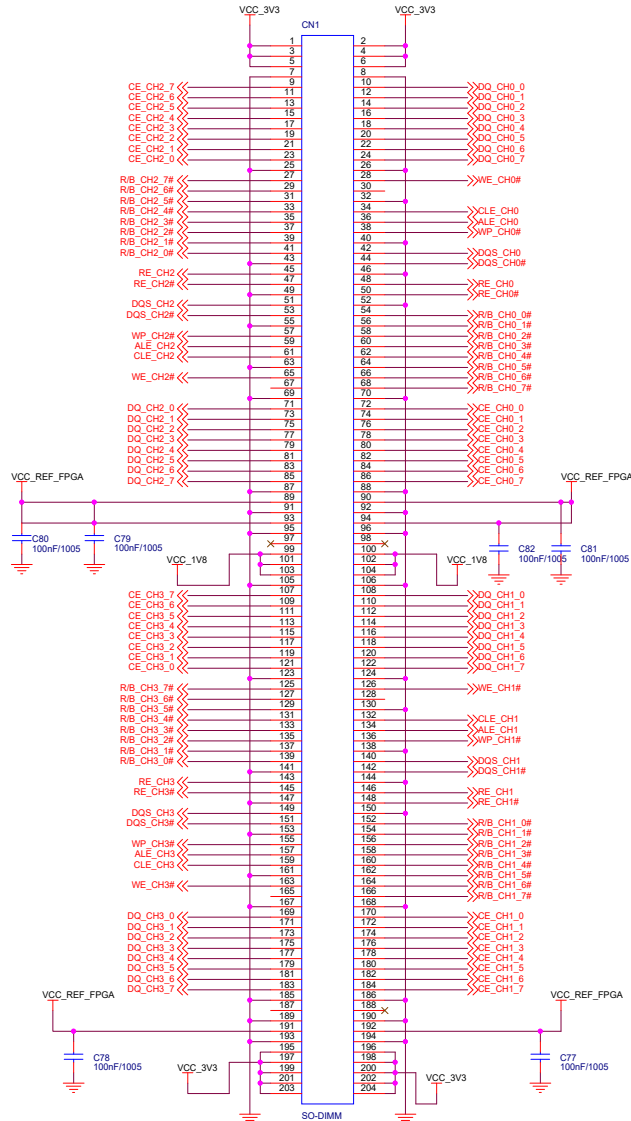


SMD type 2.54mm PIN HEADER
CE/RB 및 기타 신호는 램핑지향에서 추출


신호 순서

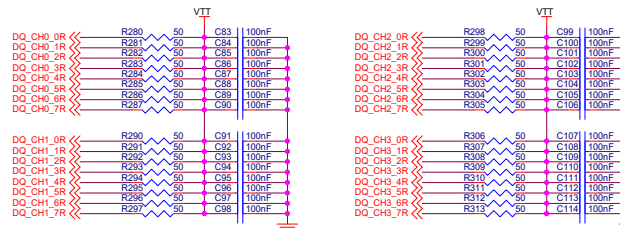



File	<Title>	Rev
Size	Document Number	<Doc>
C		
Date	Tuesday, March 22, 2016	Sheet 1 of 1

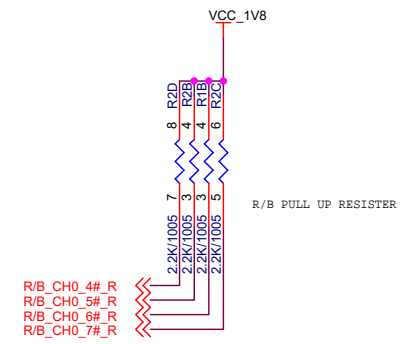


Title			
<Title>			
Size B	Document Number <Doc>		Rev <Rev Code>
Date:	Thursday, March 10, 2016	Sheet 1 of 1	

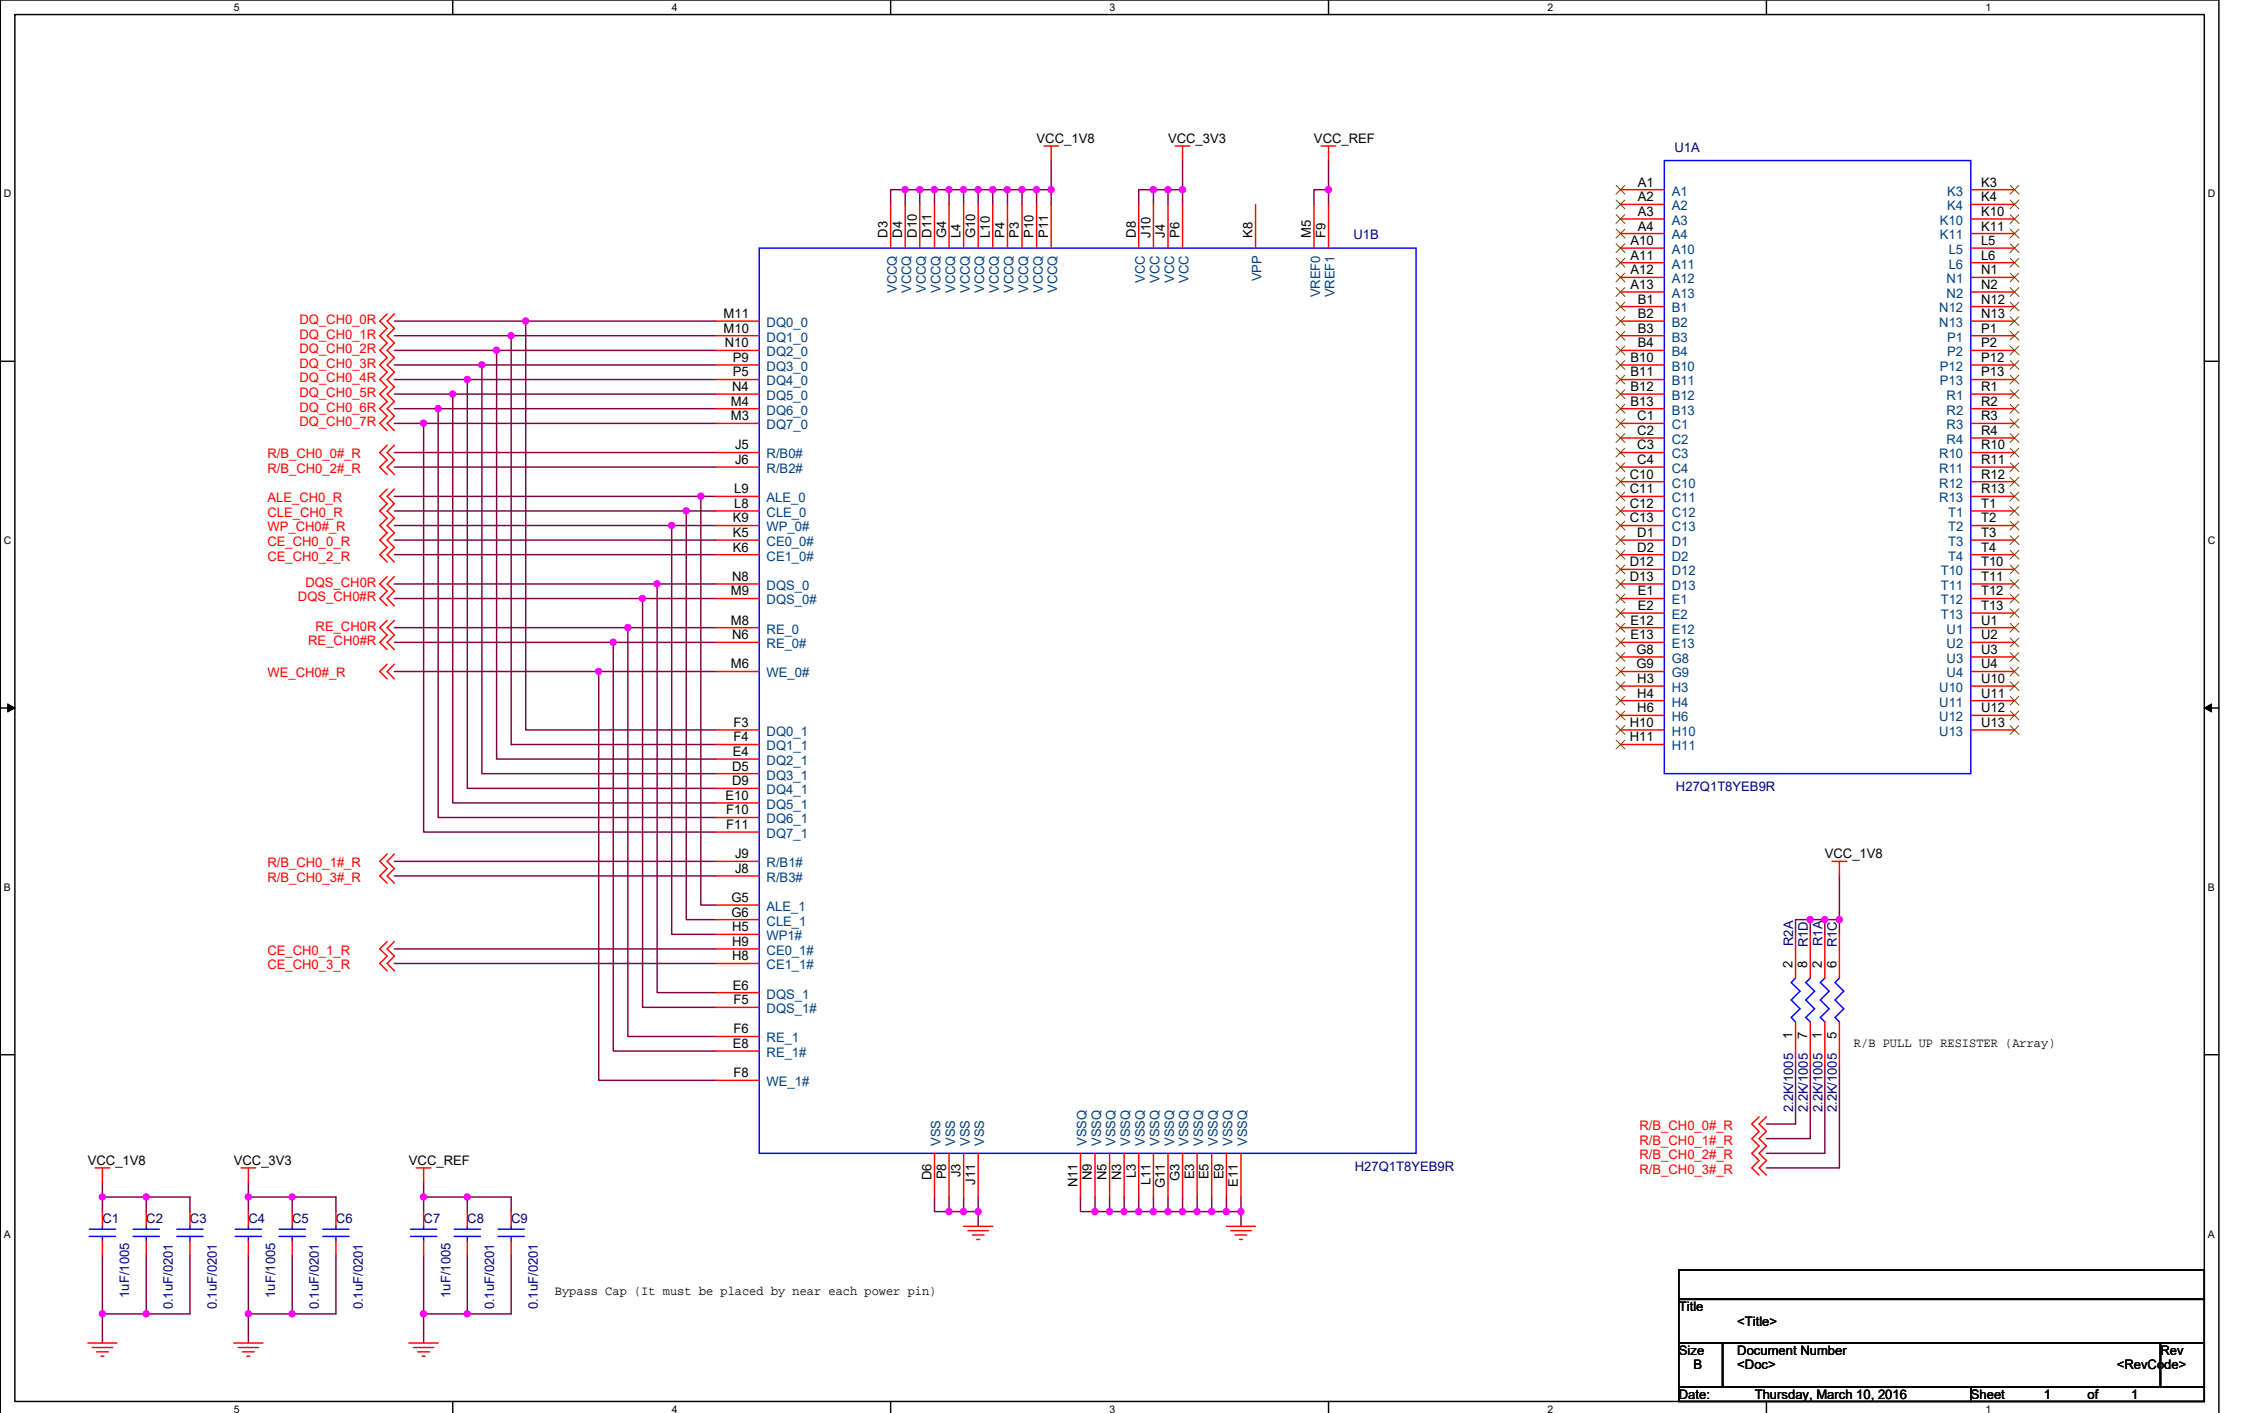

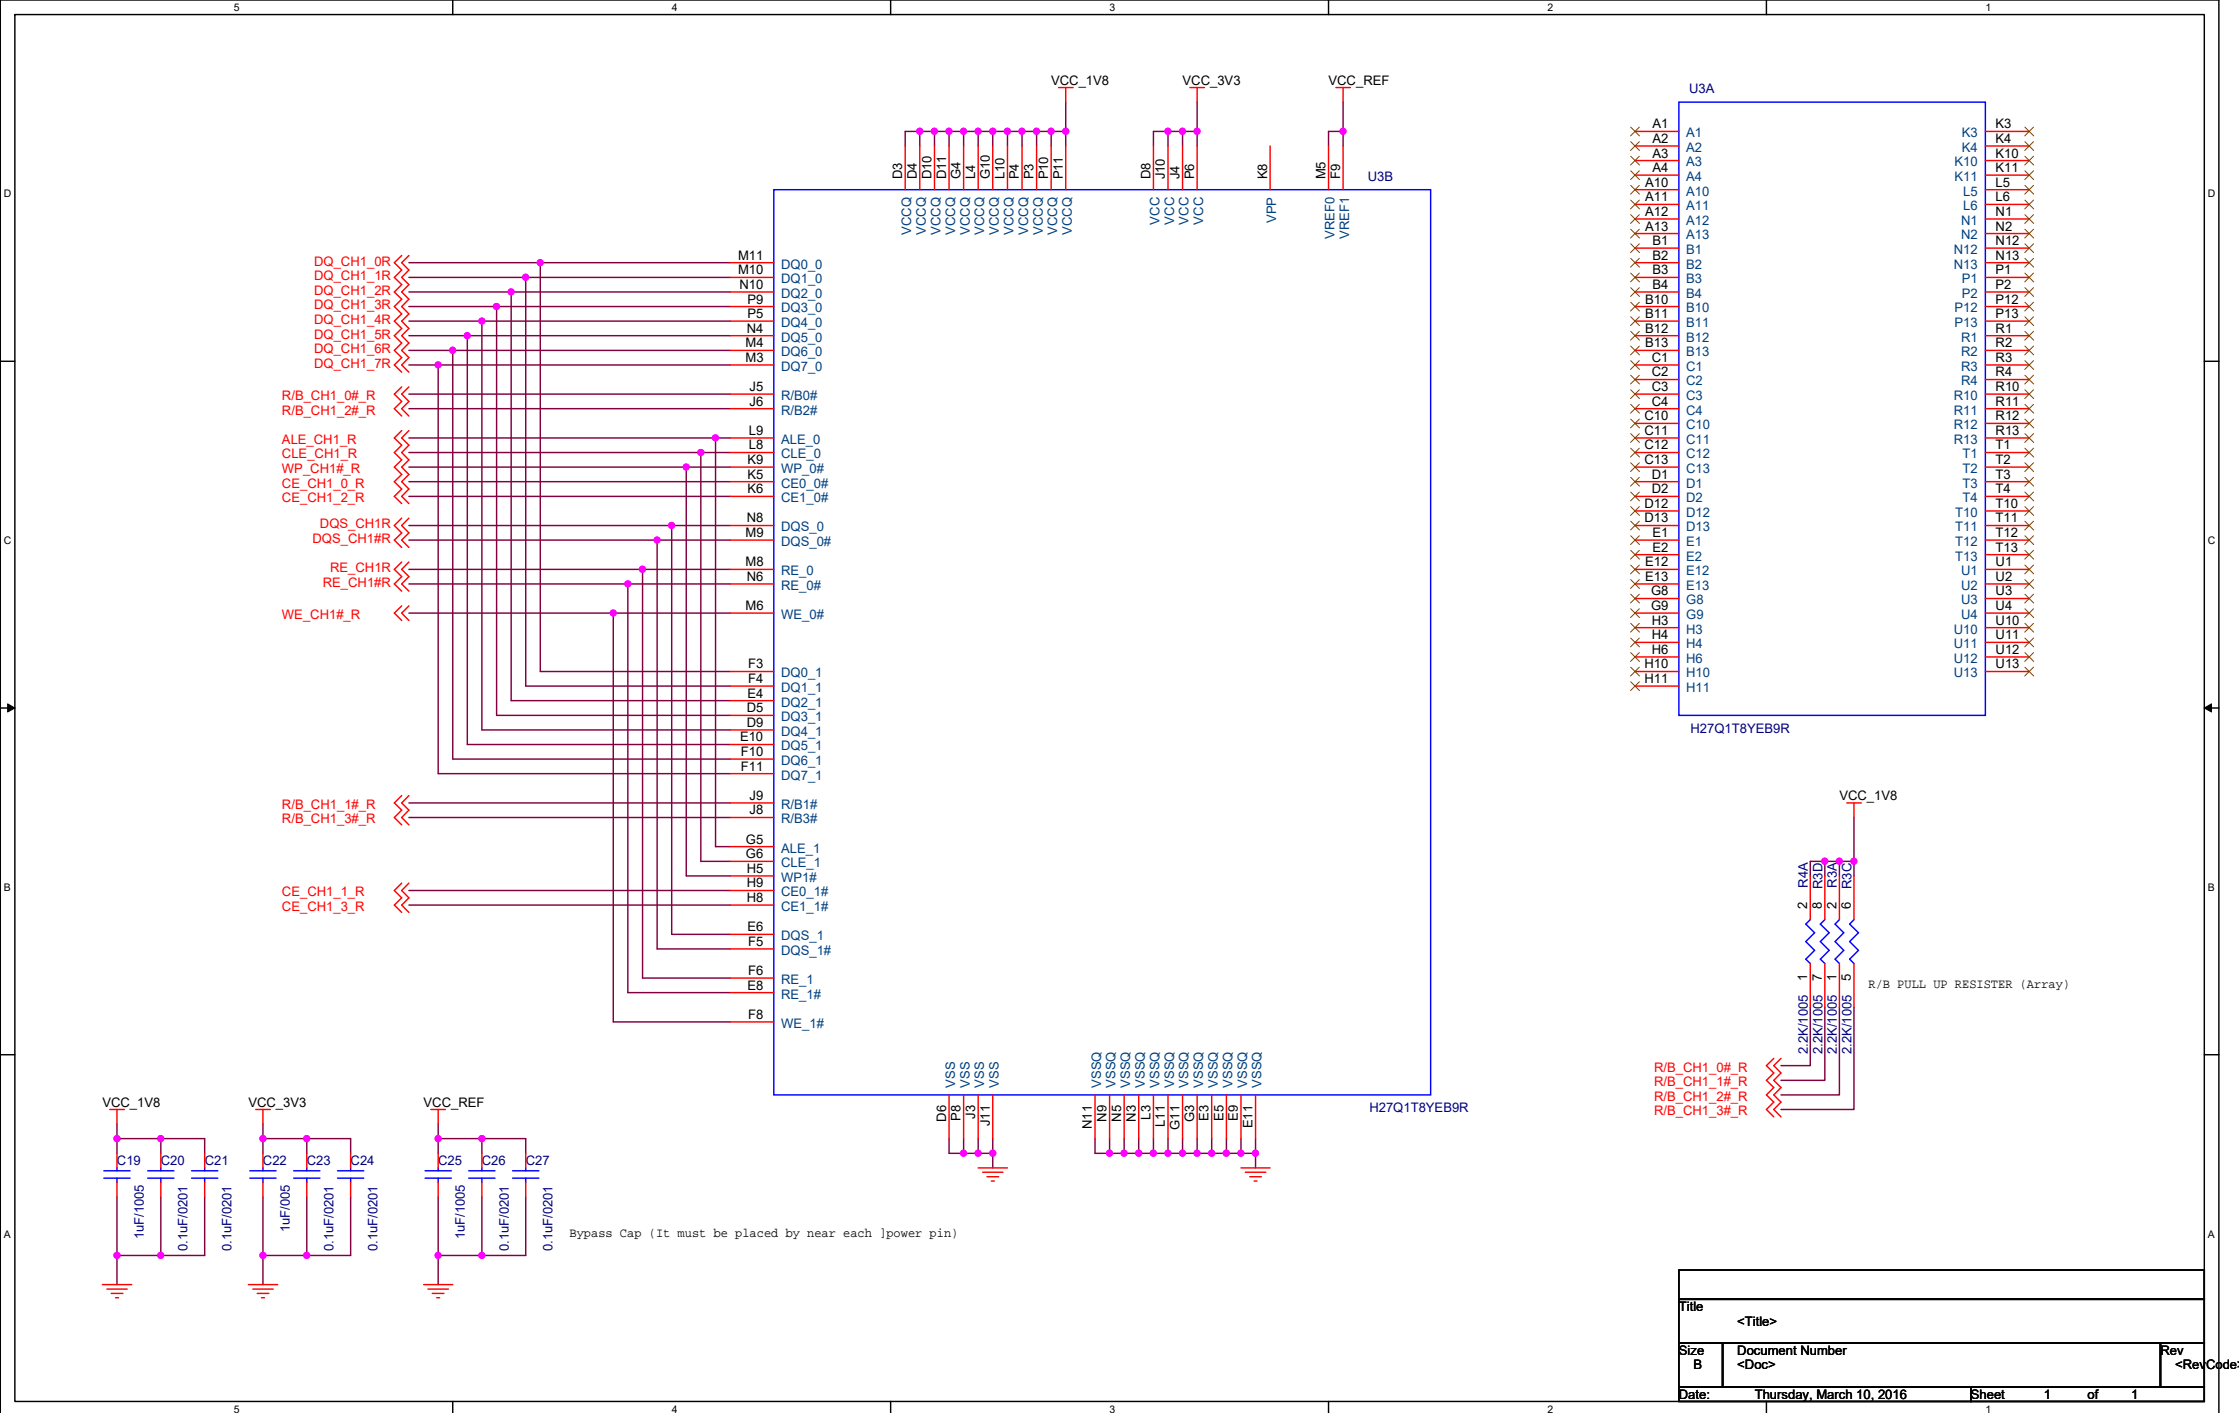


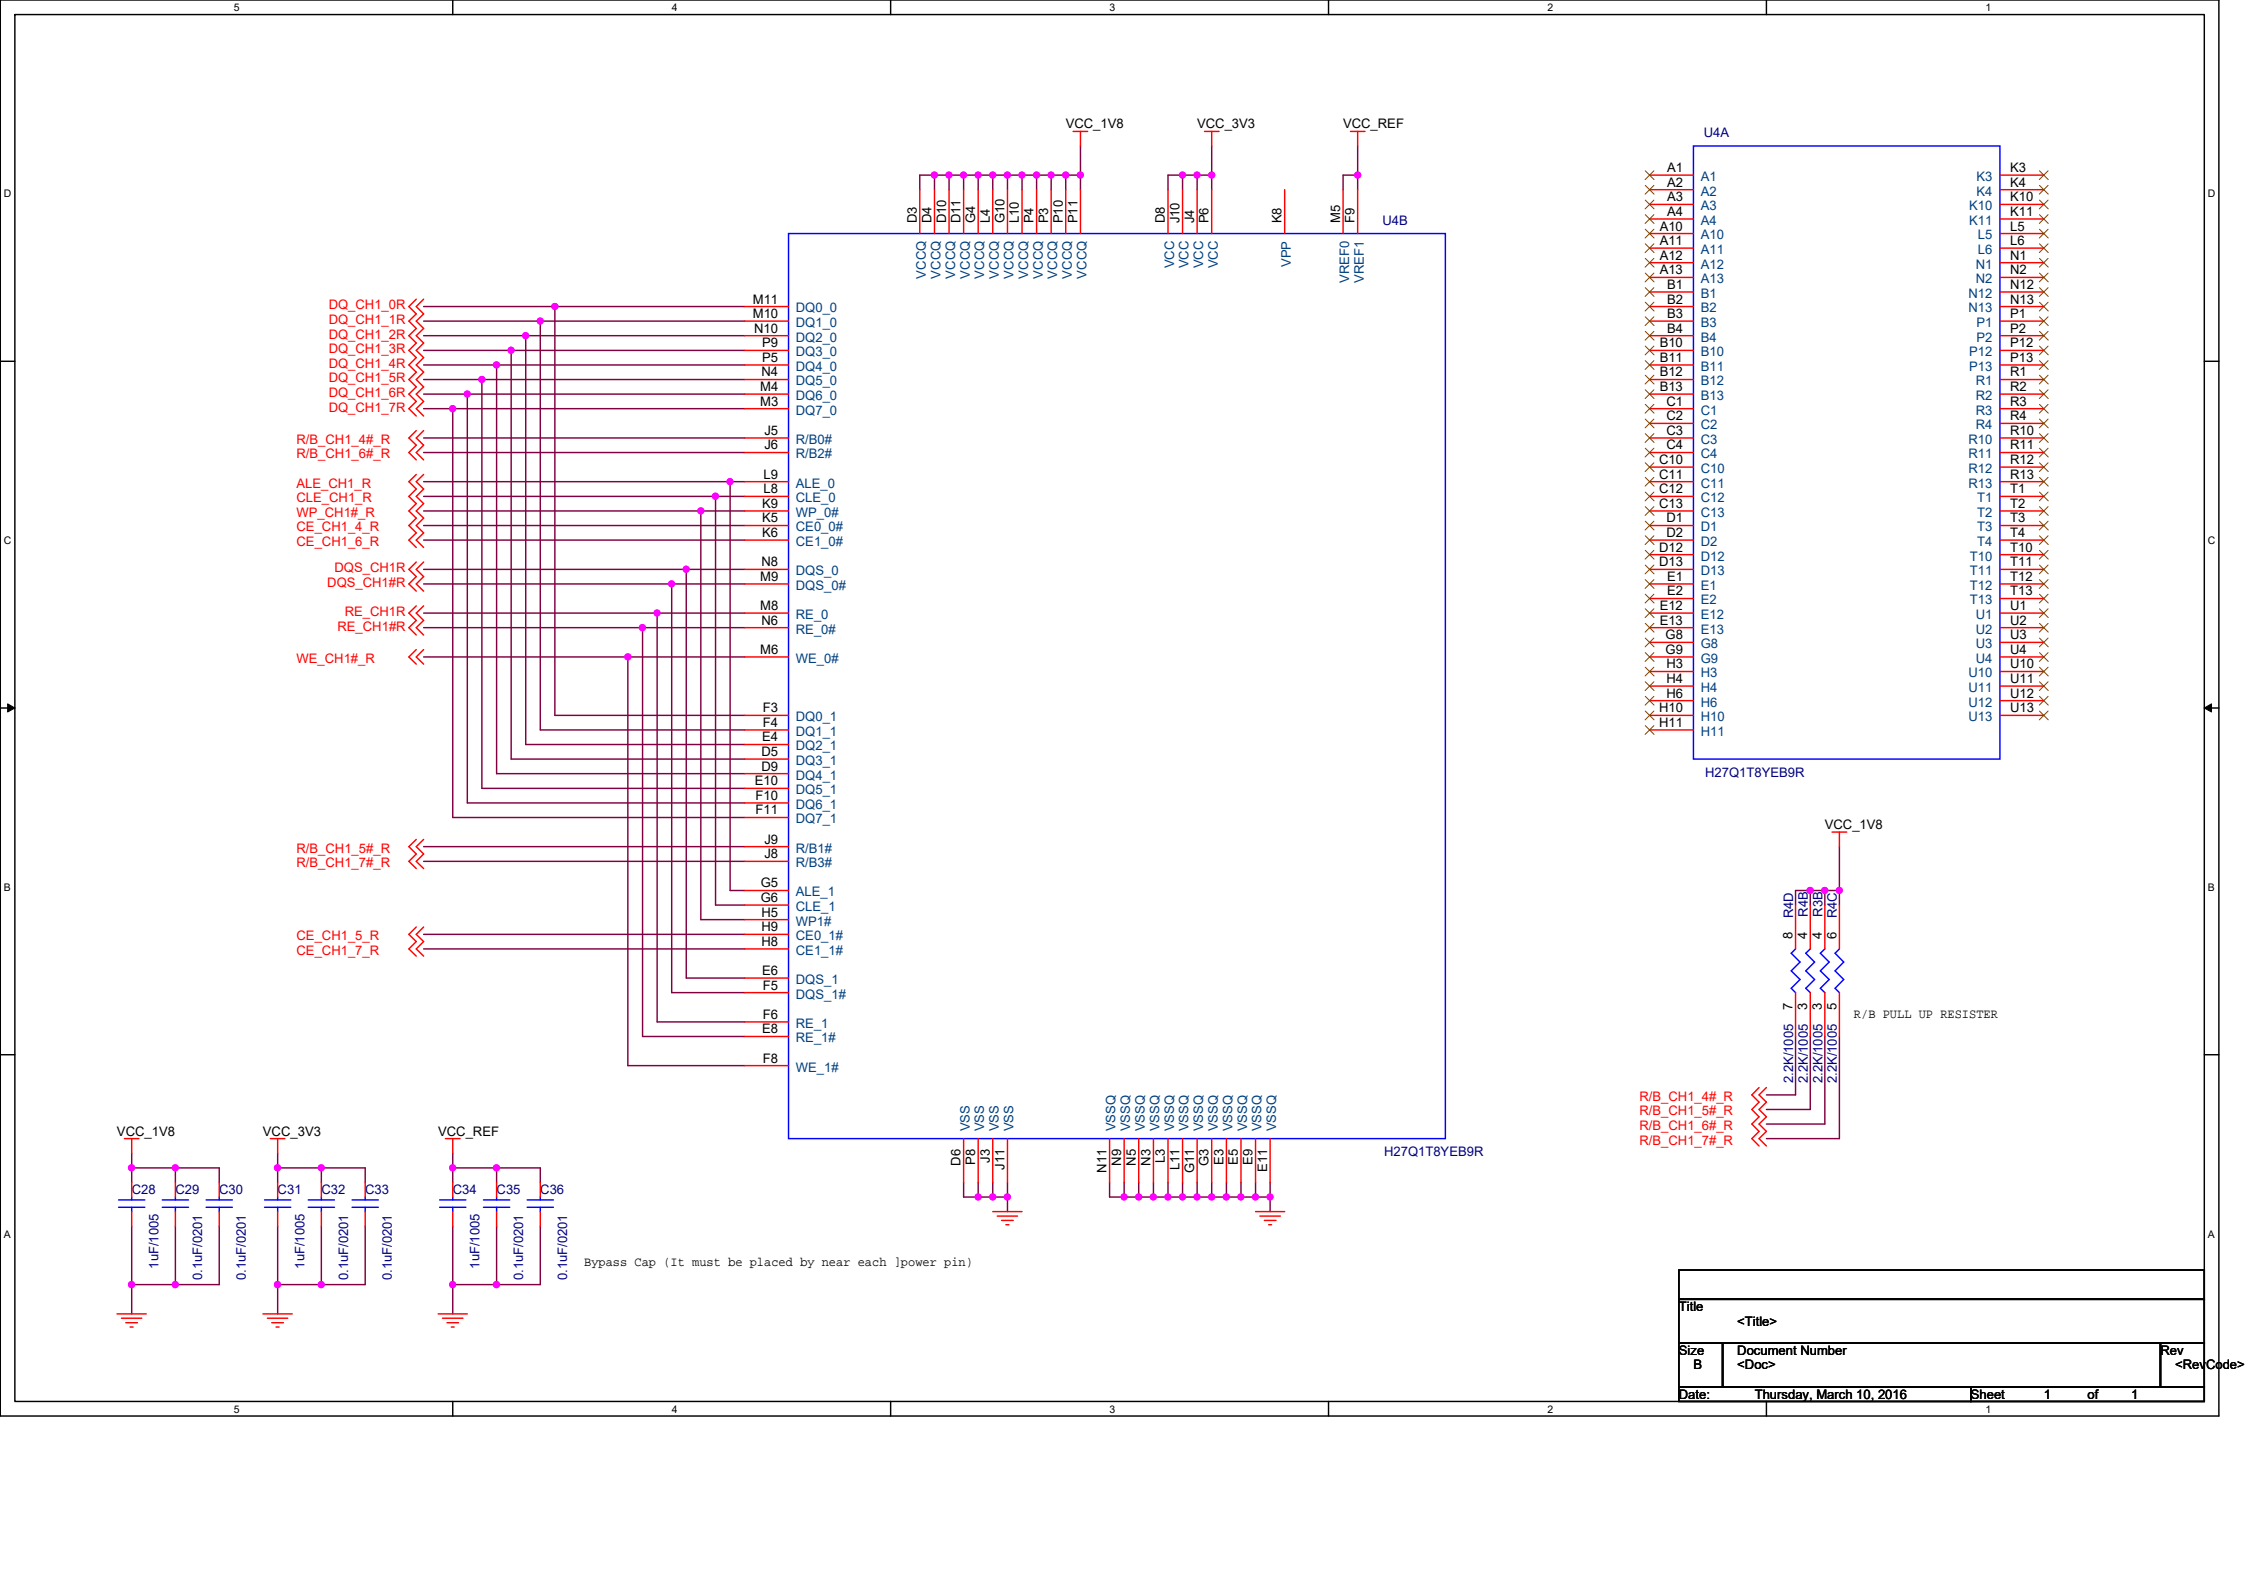


Title		
<Title>		
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Thursday, March 10, 2016	Sheet 1 of 1




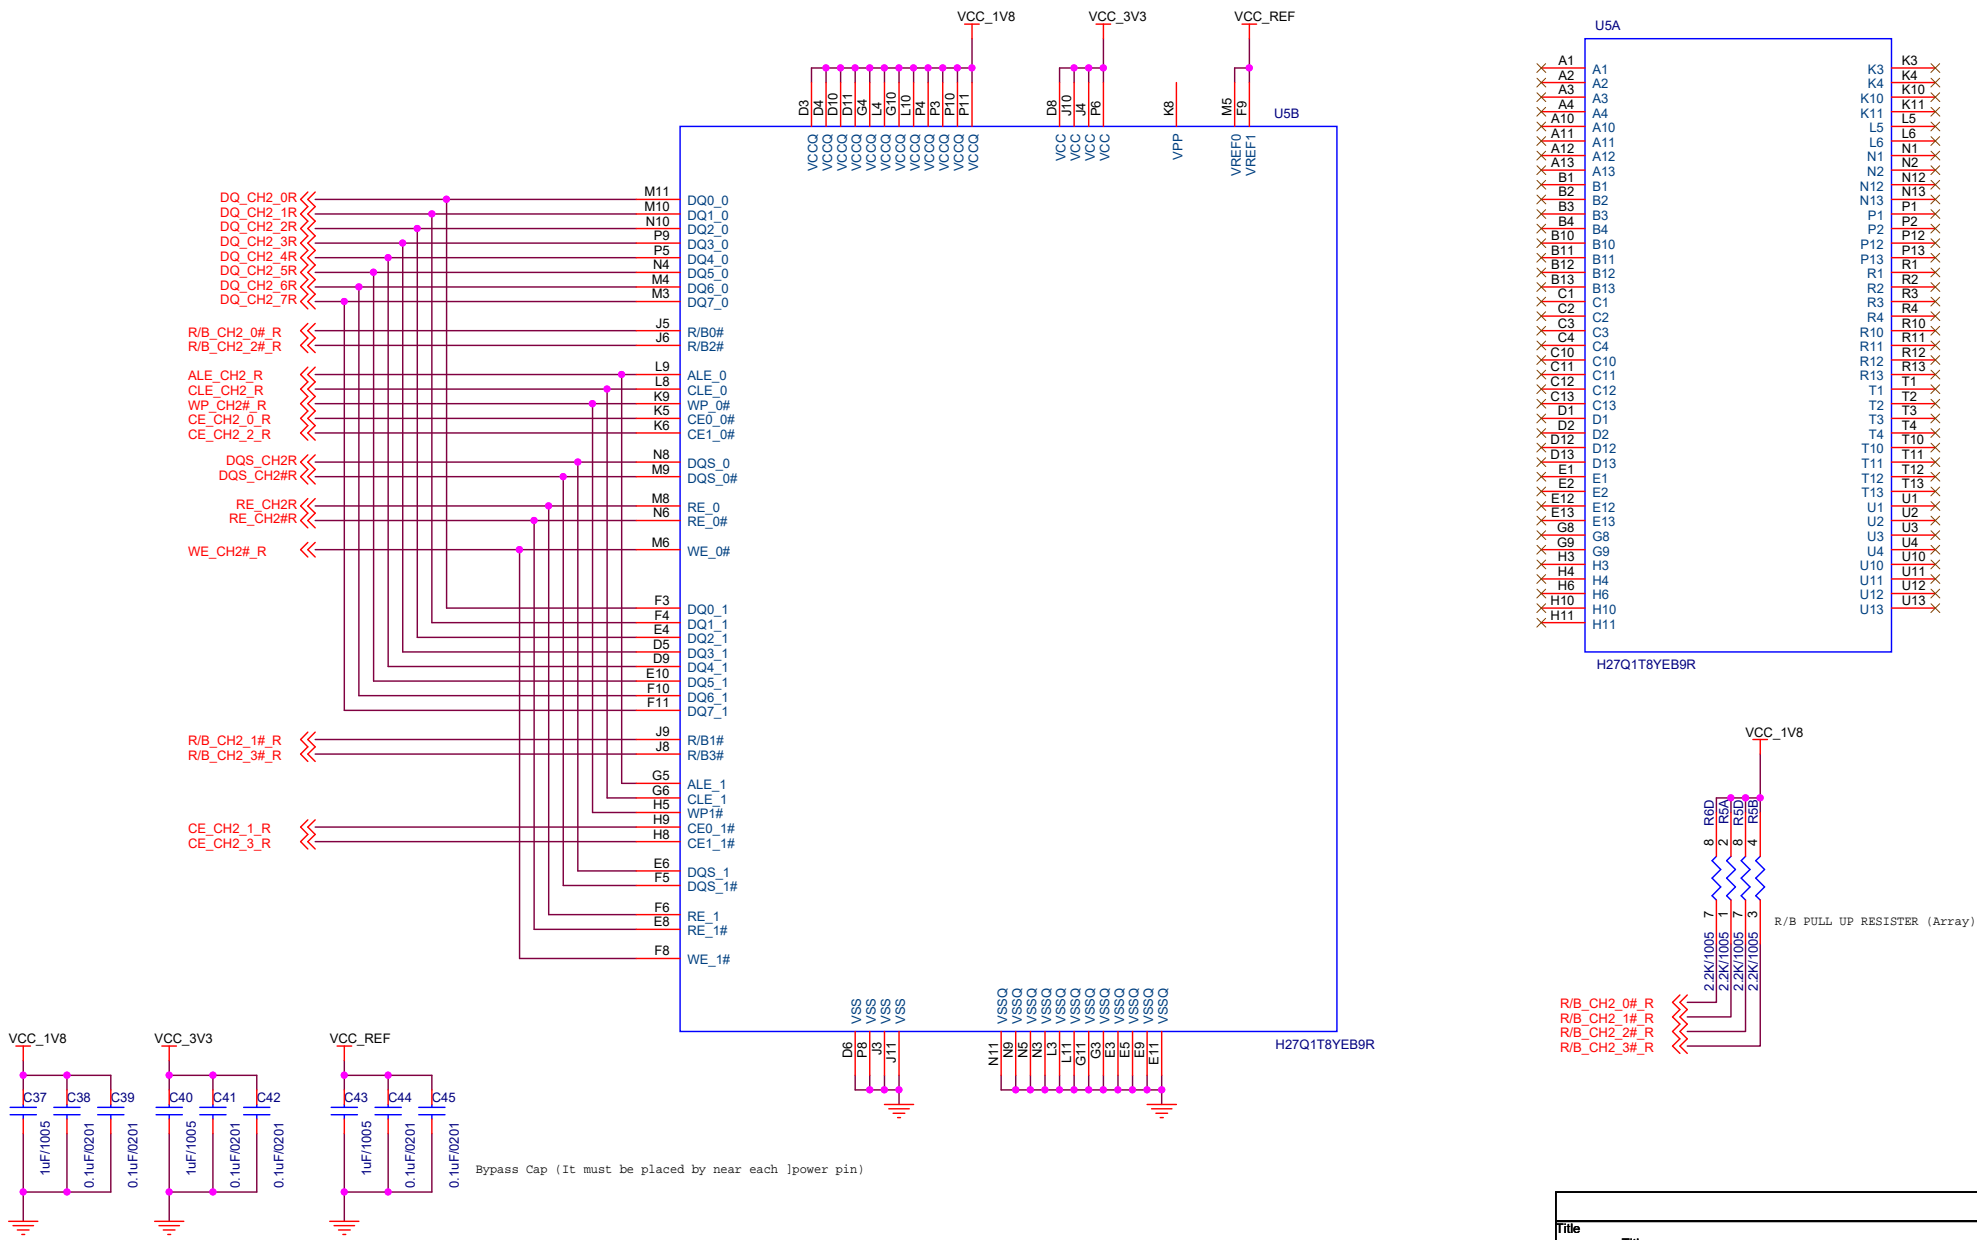


Title			<Title>
Size	Document Number		Rev
B	<Doc>		<RevCode>
Date:	Thursday, March 10, 2016		Sheet 1 of 1



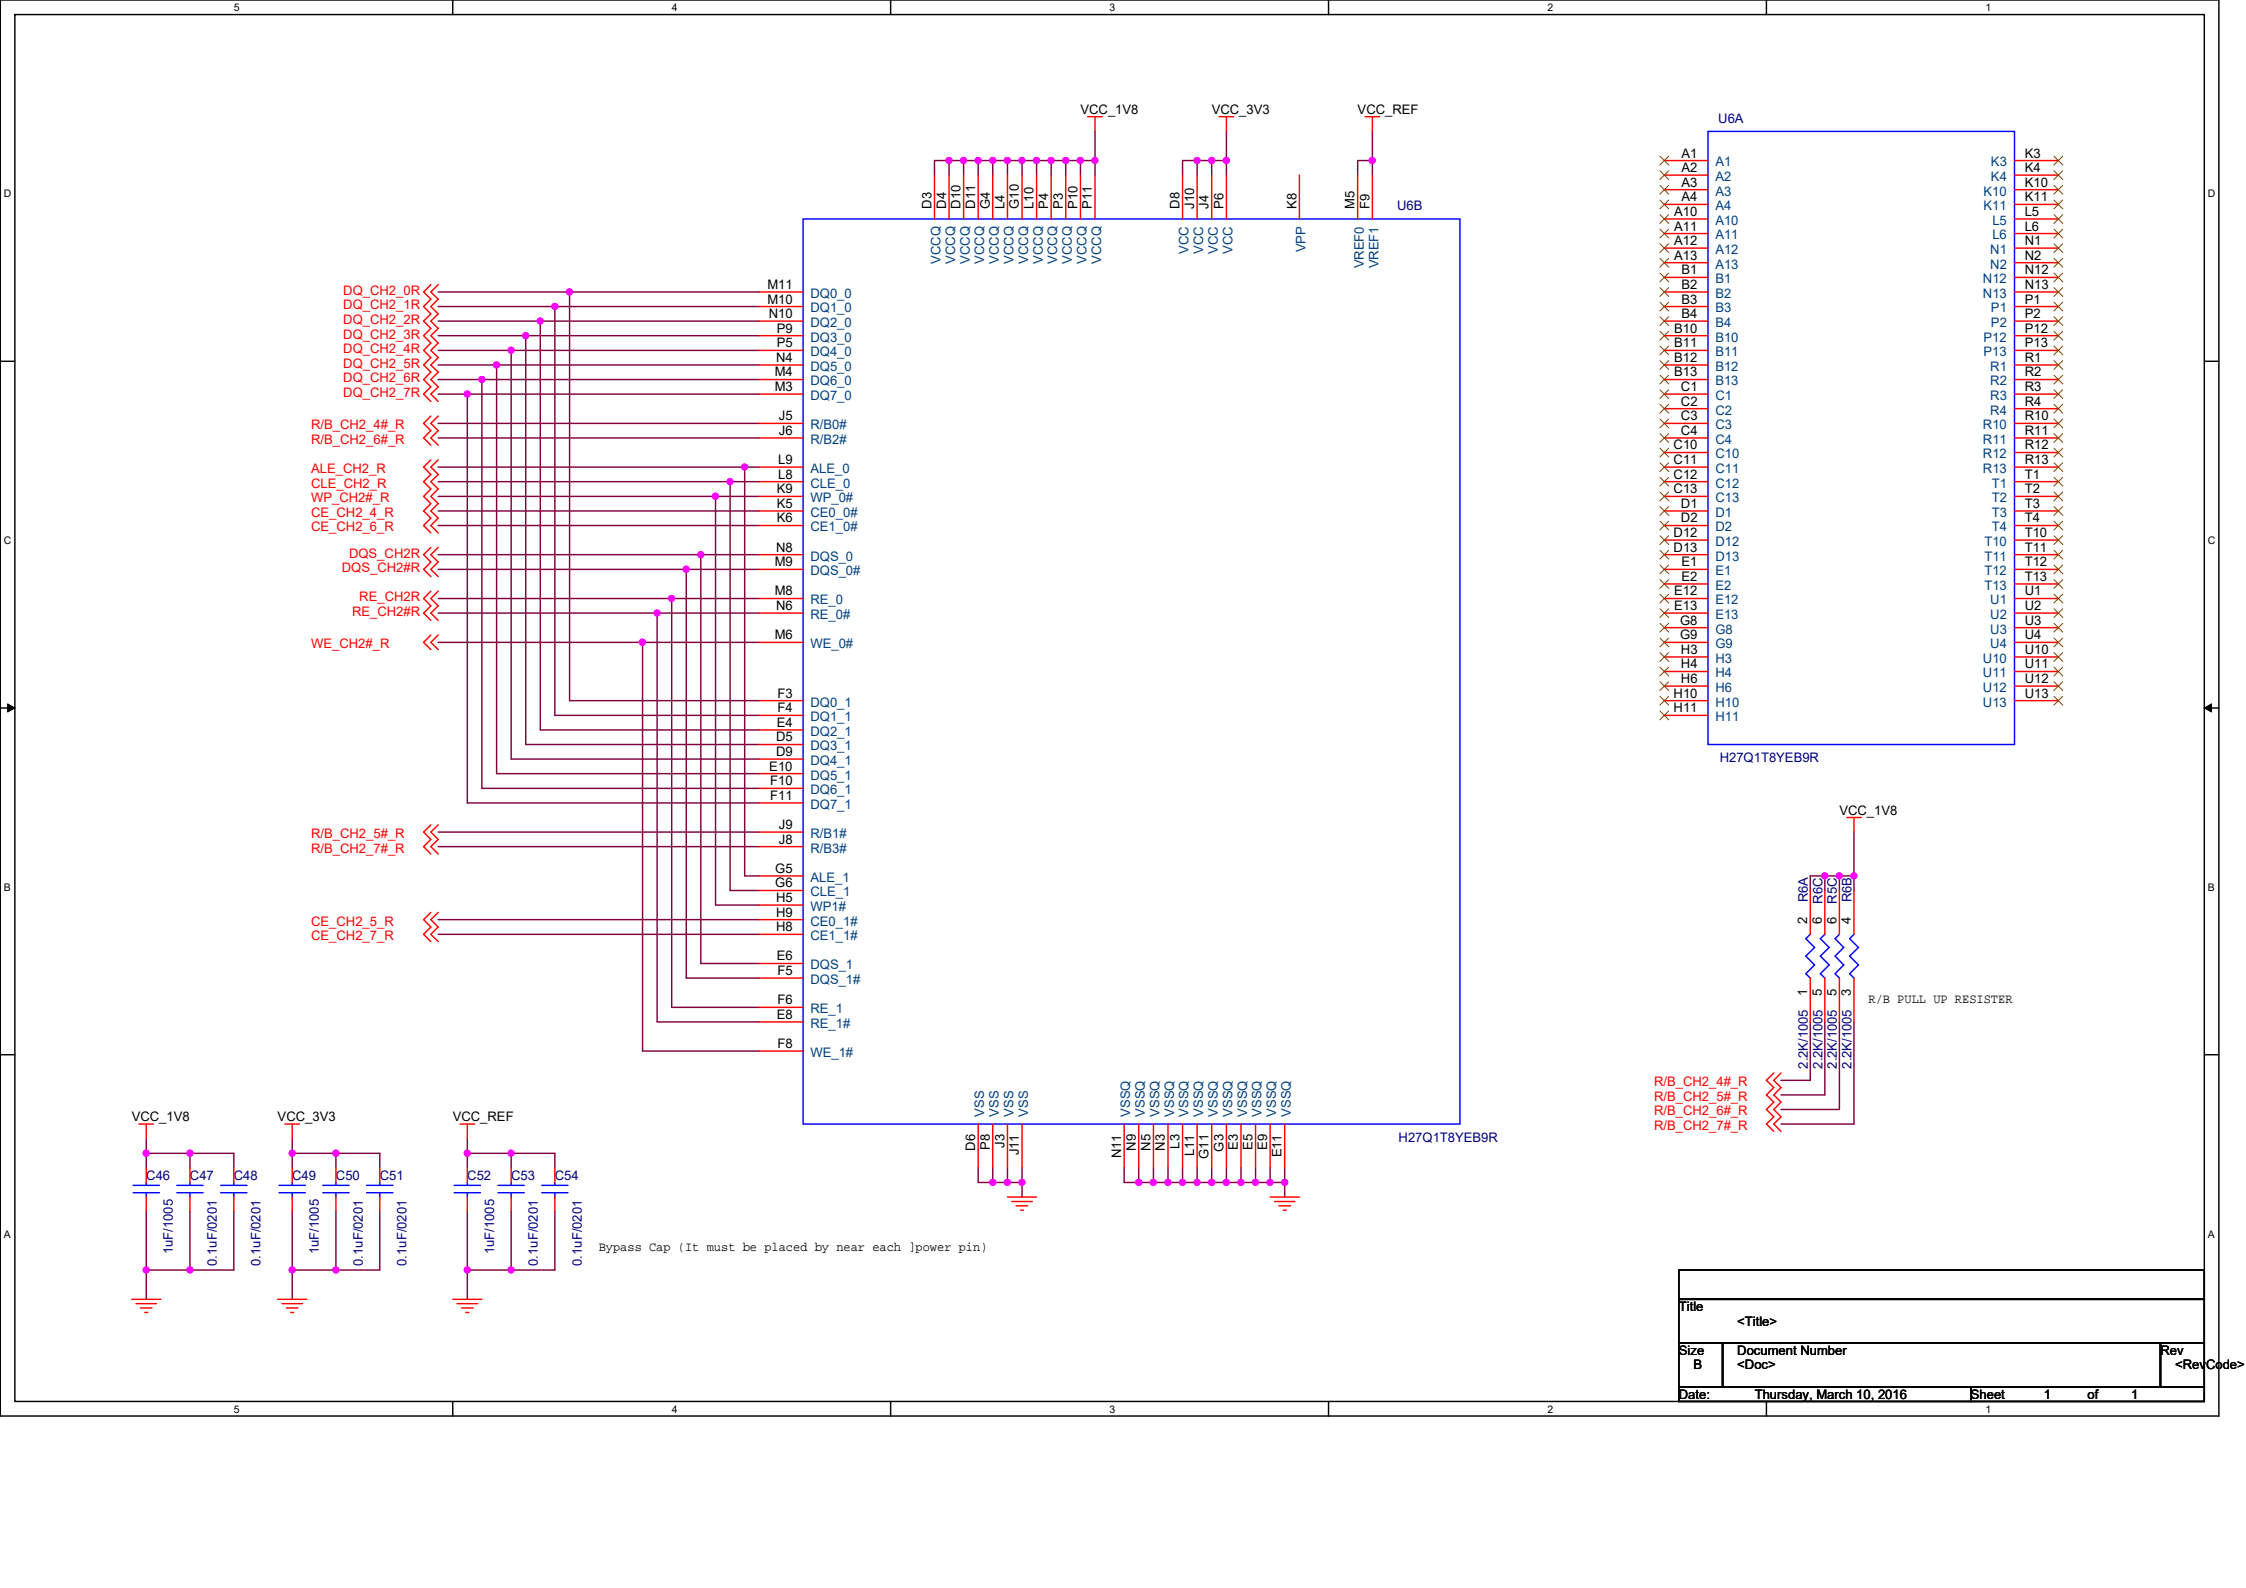


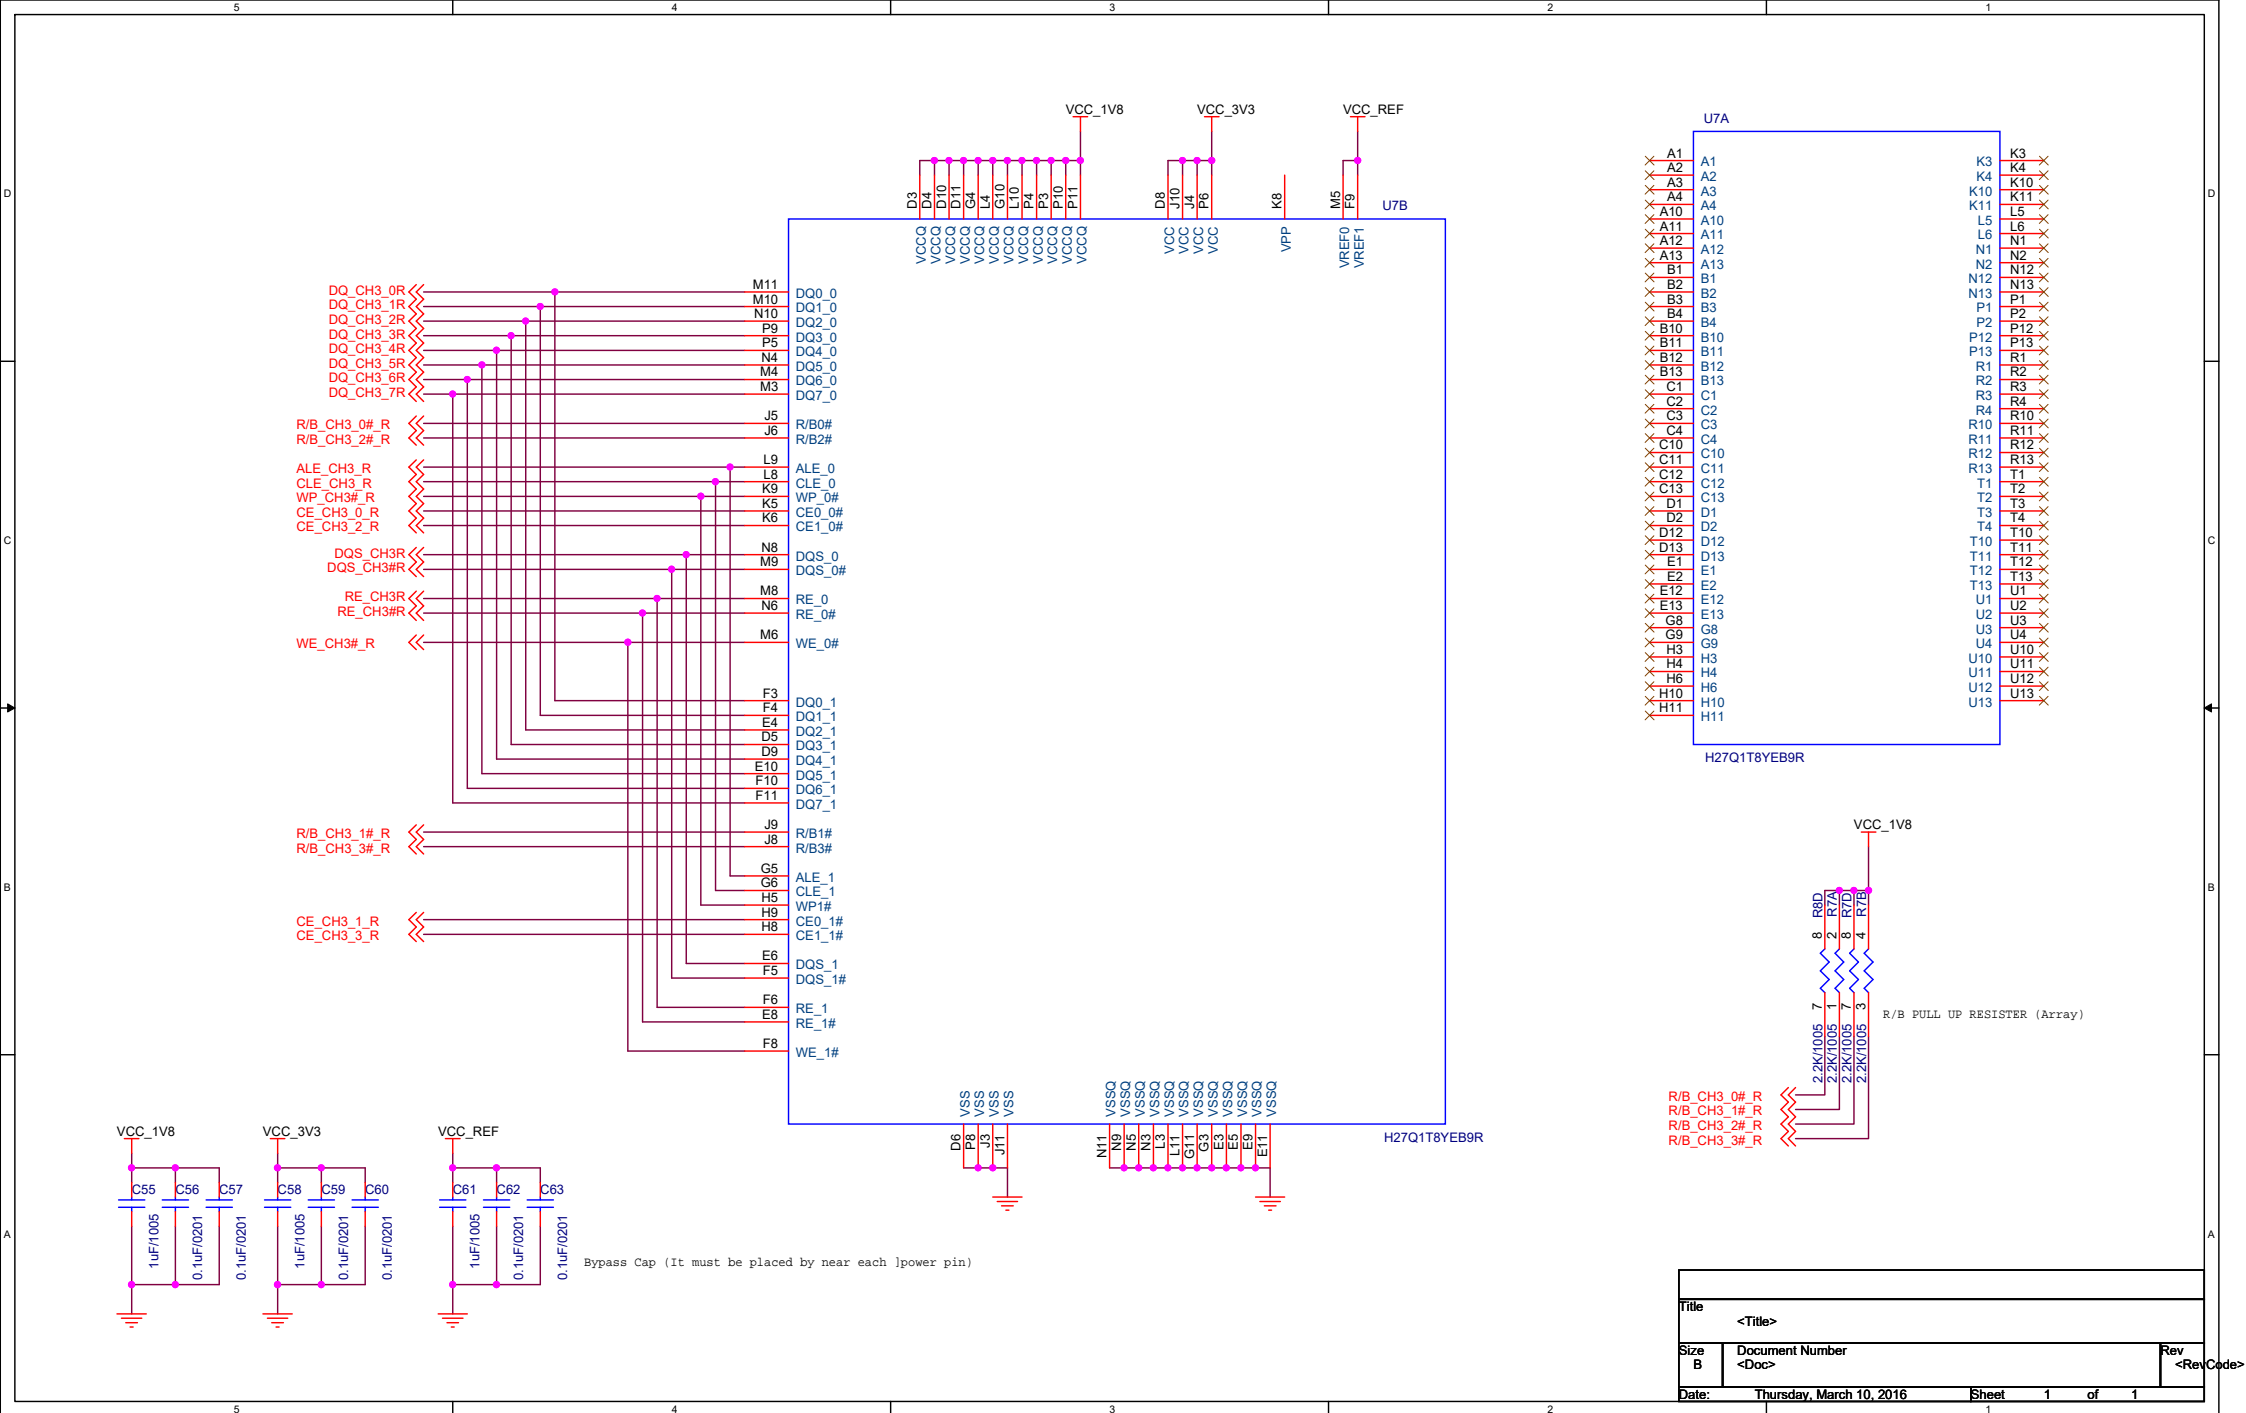

Title			<Title>
Size	Document Number	Rev	<RevCode>
B	<Doc>		
Date:	Thursday, March 10, 2016	Sheet	1 of 1

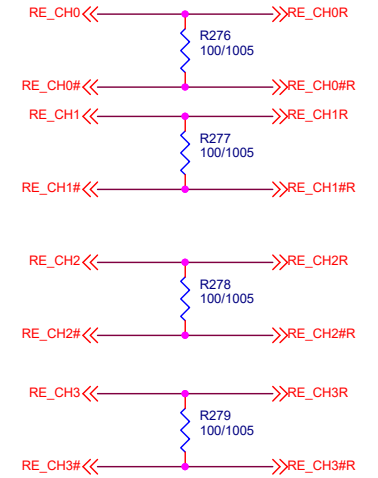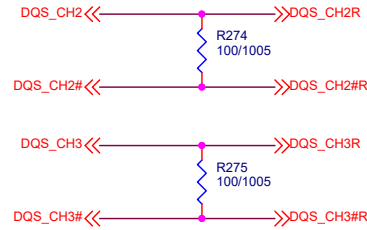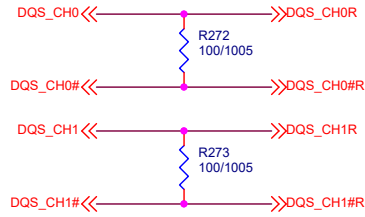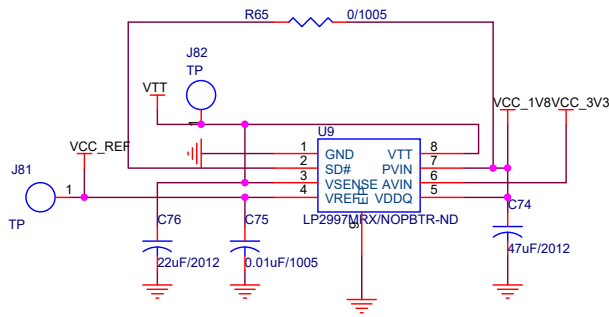

DAMPPING RESISTOR

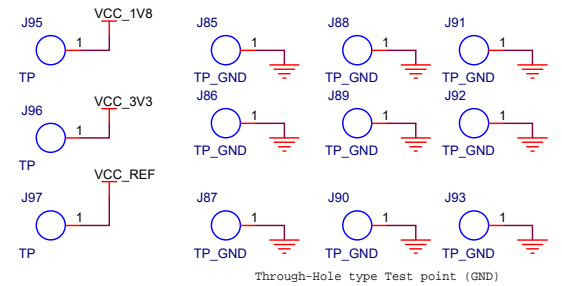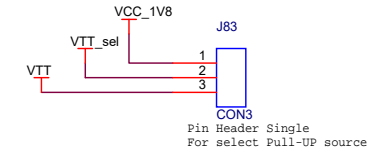

Title		
<Title>		
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Thursday, March 10, 2016	Sheet 1 of 1