


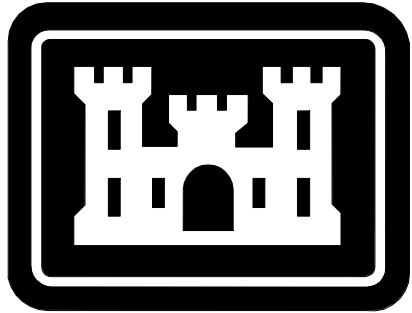

US Army Corps
of Engineers ®
LOUISVILLE DISTRICT

BOWST ADDITION AND RENOVATIONS TO B-321 NIAGARA FALLS AIR RESERVE STATION, NY

P2#: 508014

15 April 2025
W912QR25BA008



US Army Corps
of Engineers ®

MARK	DESCRIPTION	DATE

Autodesk Civil 3D/ARCS BOWST Addendum 2024, 04_ARCH/ARCS BOWST ADD_P2/14

File Path:

Plot Date: 6/24/2024 3:32:33 PM

Plot Date:

DESIGNED BY: A. LUGNIBILL	ISSUE DATE: JUNE 26, 2024
DRAWN BY: A. MORRISON	SOLICITATION NO.:
CHECKED BY: S. DUFFY	CONTRACT NO.:
SUBMITTED BY:	
SIZE: ANSI D	

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING, JR. PLACE
LOUISVILLE KY 40202-2239

AECemersion
joint venture

BOWST ADDITION AND RENOVATIONS TO B-321
NIAGARA FALLS AIR RESERVE STATION, NY
P2#: 508014

COVER SHEET


SHEET ID

G-001


W912QR25BA008_Plans-0000
W912QR25BA008_Plans-0002

CERTIFIED FINAL

AREA MAP

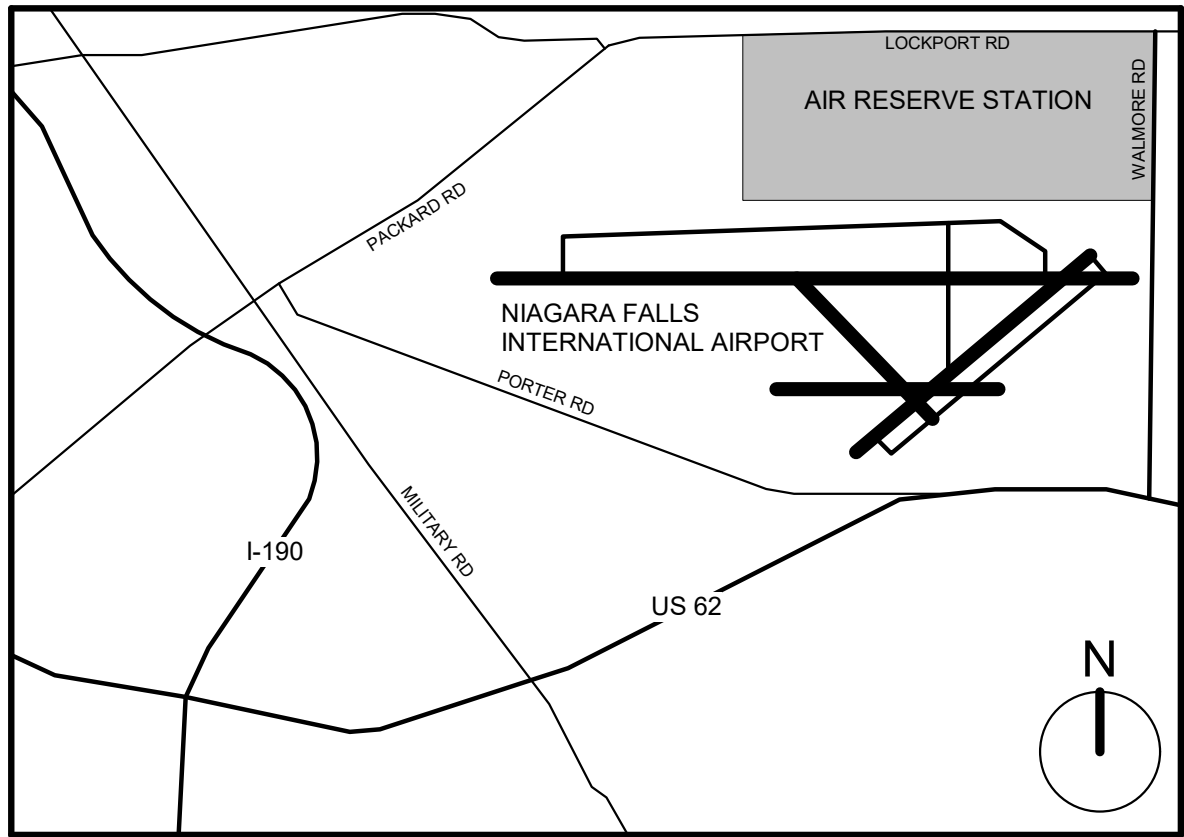


NFARS MAP

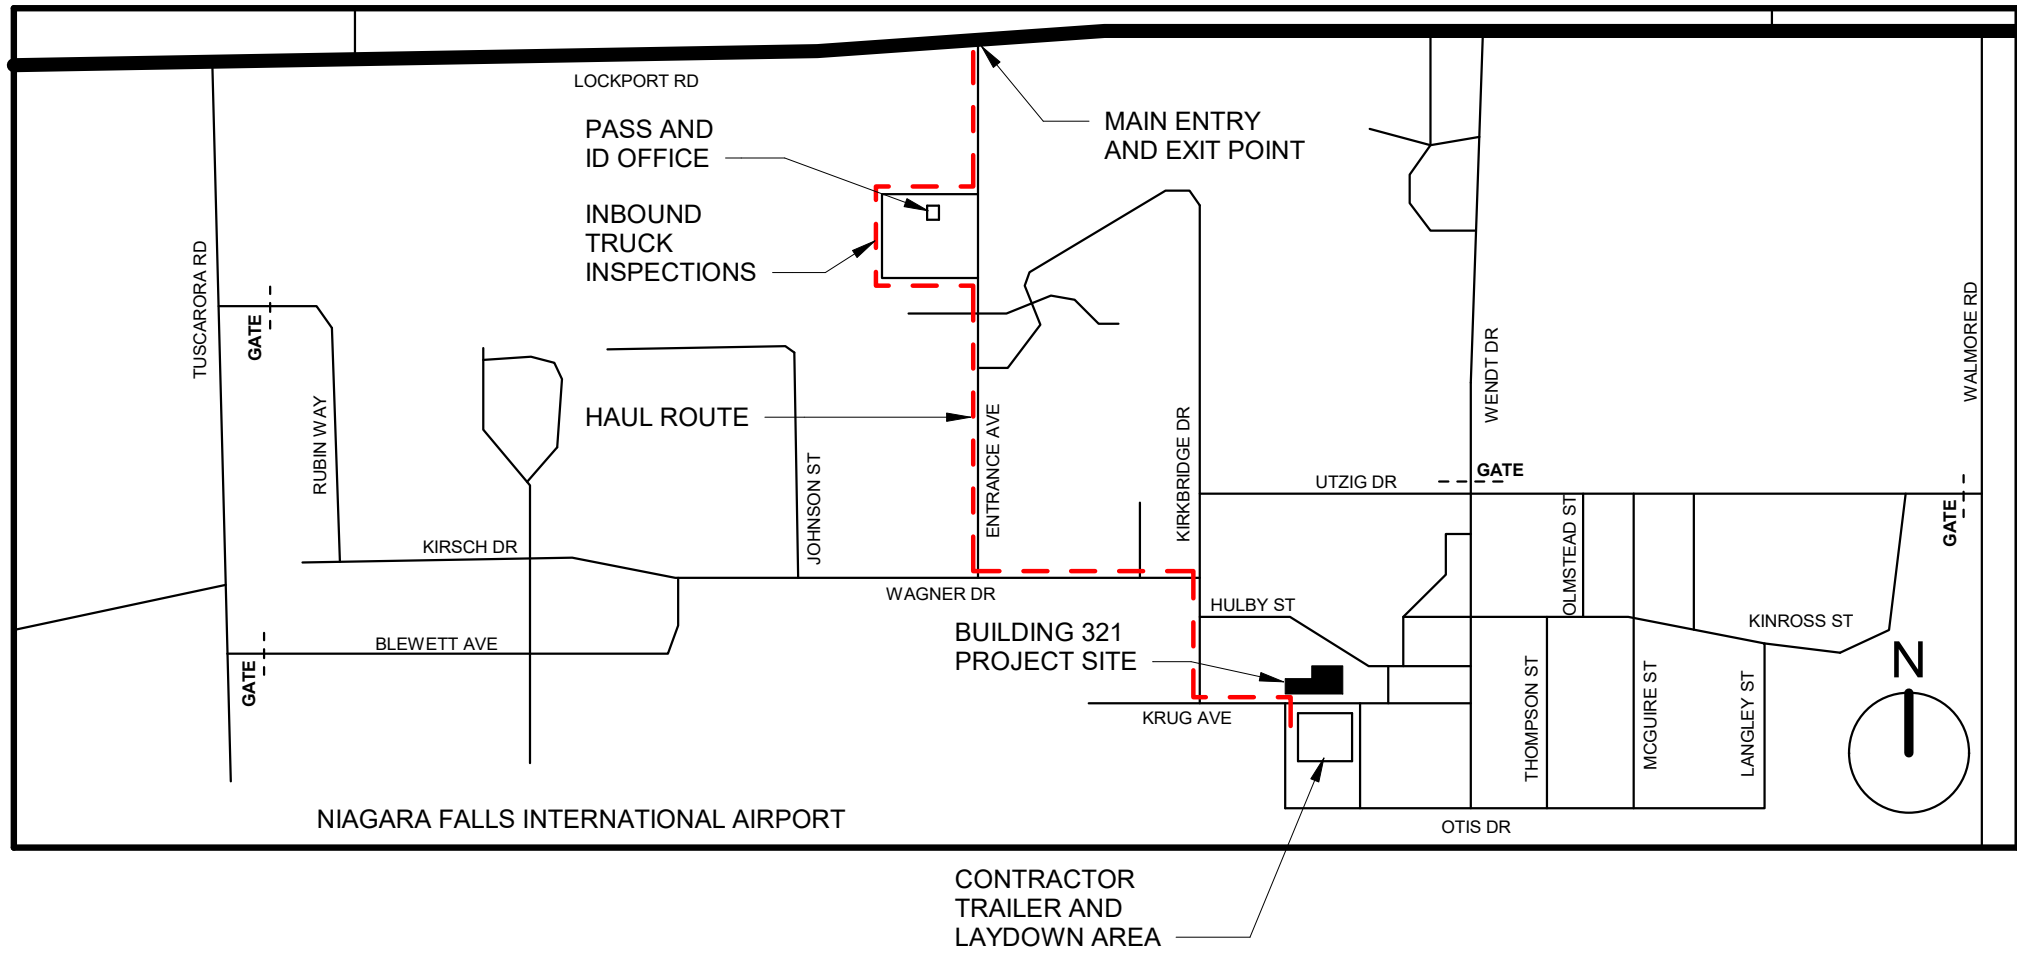

SOLICITATION NO.:
CONTRACT NO.:
ISSUE DATE: JUNE 26, 2024
VOLUME:



CERTIFIED FINAL

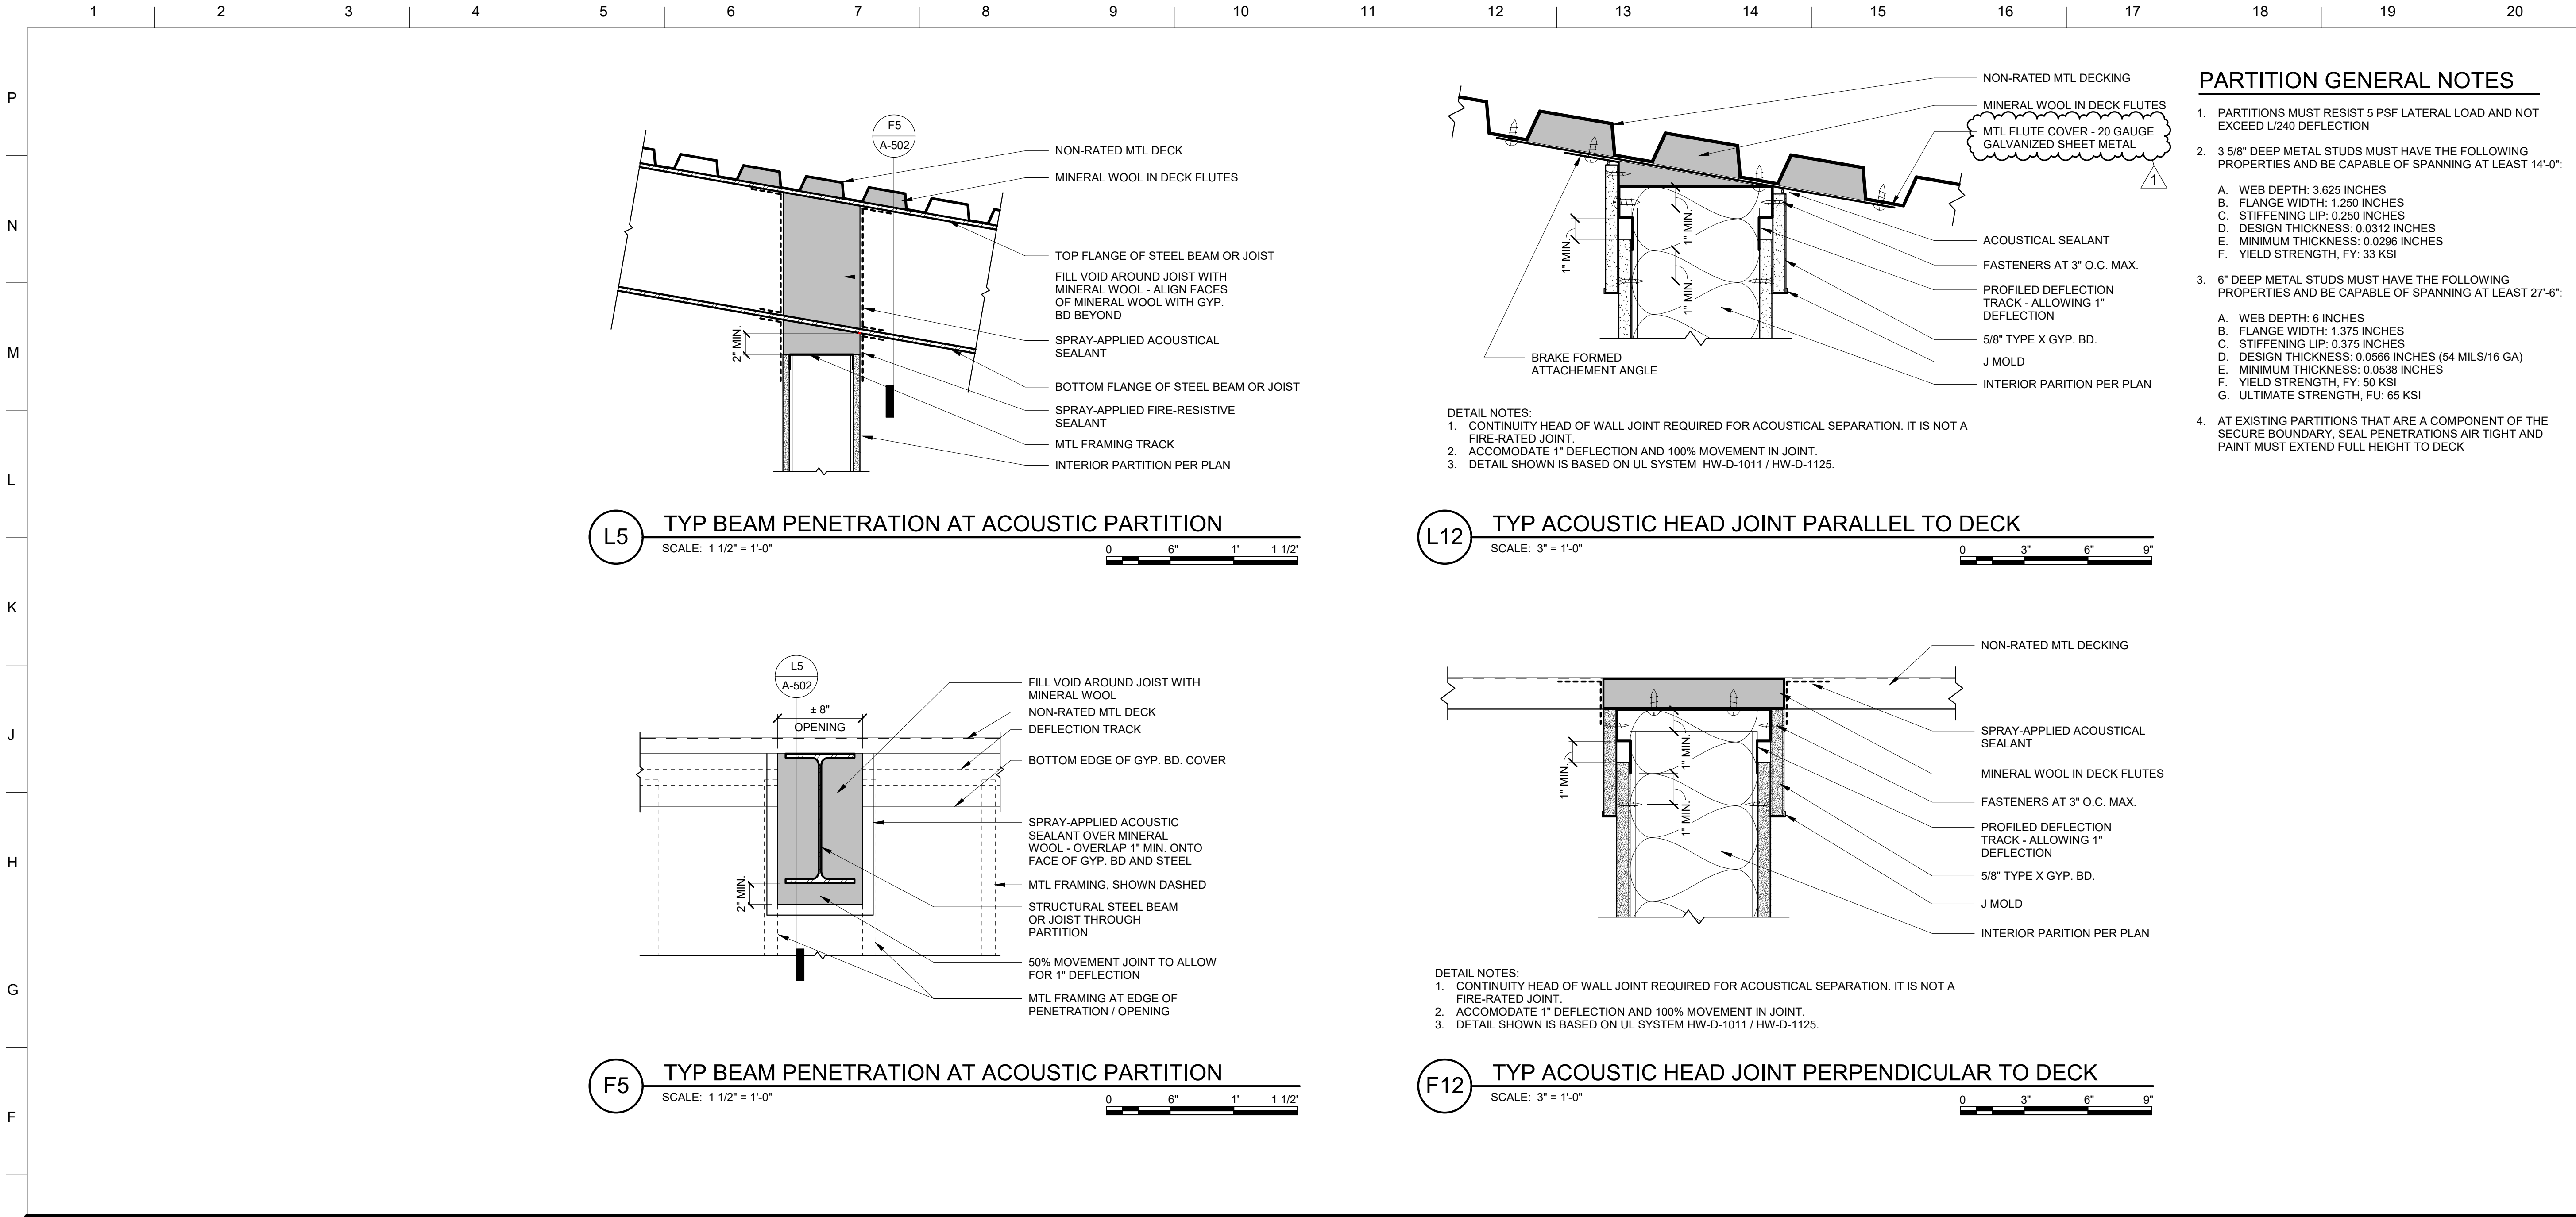


PARTITION GENERAL NOTES

- PARTITIONS MUST RESIST 5 PSF LATERAL LOAD AND NOT EXCEED L/240 DEFLECTION
- 3 5/8" DEEP METAL STUDS MUST HAVE THE FOLLOWING PROPERTIES AND BE CAPABLE OF SPANNING AT LEAST 14'-0":
 - WEB DEPTH: 3.625 INCHES
 - FLANGE WIDTH: 1.250 INCHES
 - STIFFENING LIP: 0.250 INCHES
 - DESIGN THICKNESS: 0.0312 INCHES
 - MINIMUM THICKNESS: 0.0296 INCHES
 - YIELD STRENGTH, FY: 33 KSI
- 6" DEEP METAL STUDS MUST HAVE THE FOLLOWING PROPERTIES AND BE CAPABLE OF SPANNING AT LEAST 27'-6":
 - WEB DEPTH: 6 INCHES
 - FLANGE WIDTH: 1.375 INCHES
 - STIFFENING LIP: 0.375 INCHES
 - DESIGN THICKNESS: 0.0566 INCHES (54 MILS/16 GA)
 - MINIMUM THICKNESS: 0.0538 INCHES
 - YIELD STRENGTH, FY: 50 KSI
 - ULTIMATE STRENGTH, FU: 65 KSI
- AT EXISTING PARTITIONS THAT ARE A COMPONENT OF THE SECURE BOUNDARY, SEAL PENETRATIONS AIR TIGHT AND PAINT MUST EXTEND FULL HEIGHT TO DECK

PARTITION TYPES

VARIES
B/ STRUCTURE

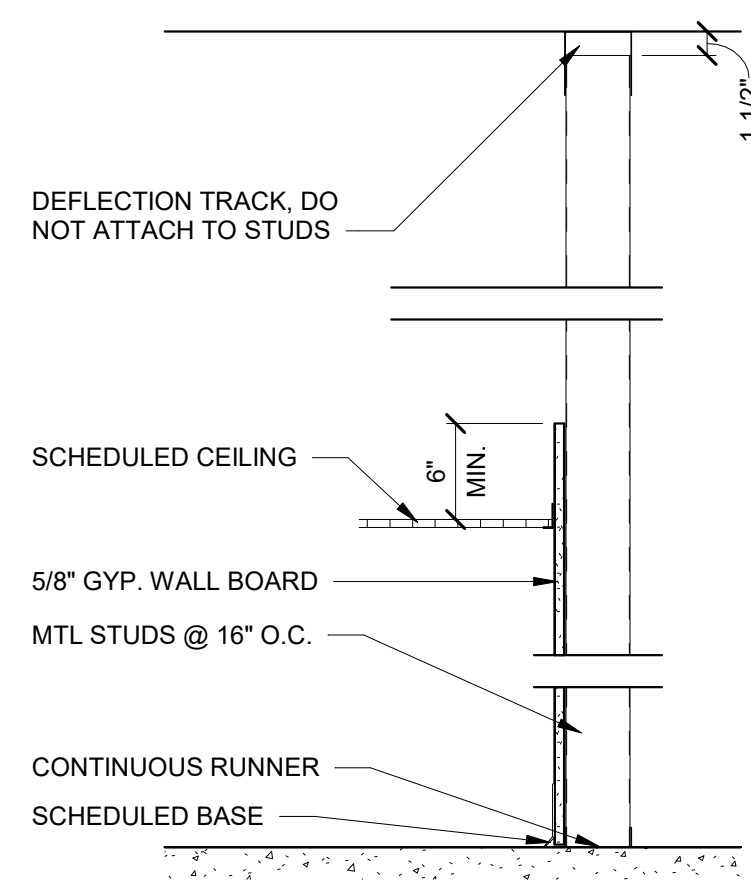

PARTITION TYPE 'D'

SCALE: NTS


TYPICAL:
MTL STUDS @ 16" O.C., 5/8" GWB ONE SIDE. EXTEND 6" MIN. ABOVE HIGHEST ADJACENT CEILING OR BULKHEAD. EXTEND MTL STUDS TO UNDERSIDE OF DECK. REFER TO GENERAL NOTES FOR STRUCTURAL PROPERTIES.

WALL CONSTRUCTION: 'D1'

- 3 5/8" MTL STUDS
- GWB ONE SIDE ONLY
- OVERALL THICKNESS: 4 1/4"

WALL CONSTRUCTION: 'D2'

- 6" MTL STUDS
- GWB ONE SIDE ONLY
- OVERALL THICKNESS: 6 5/8"

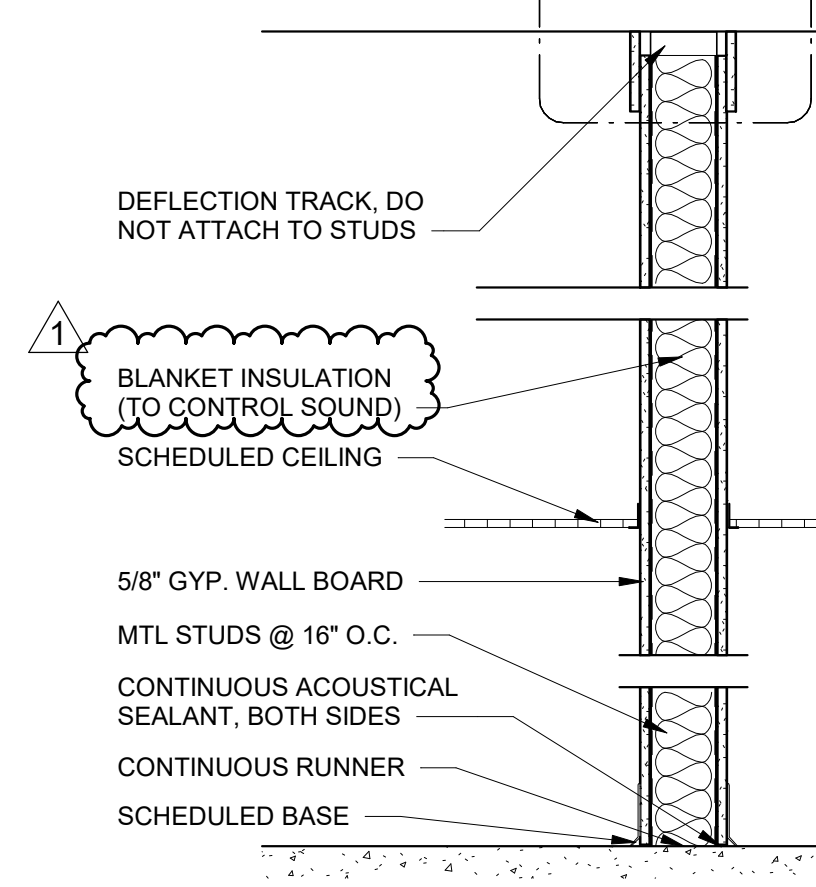

PARTITION TYPE 'B' SECURE

SCALE: NTS


TYPICAL:
MTL STUDS @ 16" O.C., 5/8" GWB EACH SIDE WITH ACOUSTICAL SEALANT AND SOUND ATTENUATION BLANKET INSULATION. EXTEND TO UNDERSIDE OF DECK. REFER TO GENERAL NOTES FOR STRUCTURAL PROPERTIES.

WALL CONSTRUCTION: 'B1'

- 3 5/8" MTL STUDS
- OVERALL THICKNESS: 4 7/8"
- UL DESIGN U419 - FOR ACOUSTICAL RATING (NOT FIRE RATED)
- STC: 45

WALL CONSTRUCTION: 'B2'

- 6" MTL STUDS
- OVERALL THICKNESS: 7 1/4"
- UL DESIGN U419 - FOR ACOUSTICAL RATING (NOT FIRE RATED)
- STC: 45

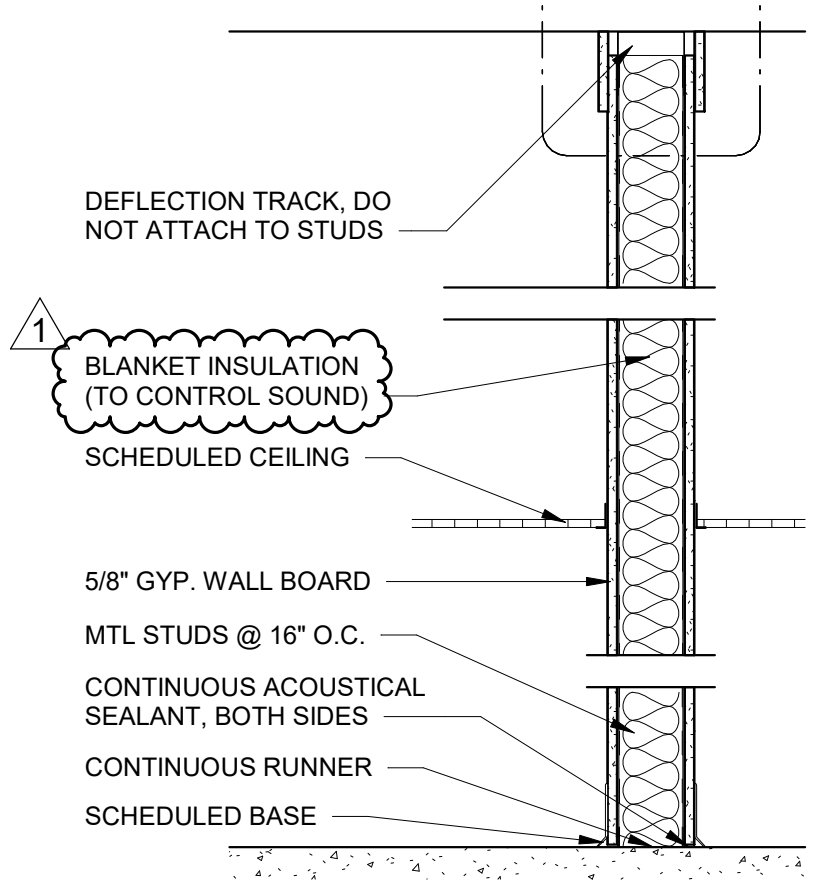

PARTITION TYPE 'A'

SCALE: NTS

TYPICAL:
MTL STUDS @ 16" O.C., 5/8" GWB EACH SIDE WITH ACOUSTICAL SEALANT AND SOUND ATTENUATION BLANKET INSULATION. EXTEND TO UNDERSIDE OF DECK. REFER TO GENERAL NOTES FOR STRUCTURAL PROPERTIES.

WALL CONSTRUCTION: 'A1'

- 3 5/8" MTL STUDS
- OVERALL THICKNESS: 4 7/8"
- UL DESIGN U419 - FOR ACOUSTICAL RATING (NOT FIRE RATED)
- STC: 45

WALL CONSTRUCTION: 'A2'

- 6" MTL STUDS
- OVERALL THICKNESS: 7 1/4"
- ACOUSTIC SOUND BATTS NOT REQUIRED



US Army Corps of Engineers®

DESIGNED BY: A. LUGNBILL	ISSUE DATE: JUNE 26, 2024	AMENDMENT 0002 DESCRIPTION 1 MARK
DRAWN BY: A. MORRISON	SOLICITATION NO.:	
CHECKED BY: S. DUFFY	CONTRACT NO.:	
SUBMITTED BY:		
SIZE: ANSI D		


US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING, JR. PLACE
LOUISVILLE KY 40202-2239

AECemersion
joint venture

BOWST ADDITION AND RENOVATIONS TO B-321
NIAGARA FALLS AIR RESERVE STATION, NY
P2#-508014

PARTITION TYPE DETAILS

SHEET ID
A-502

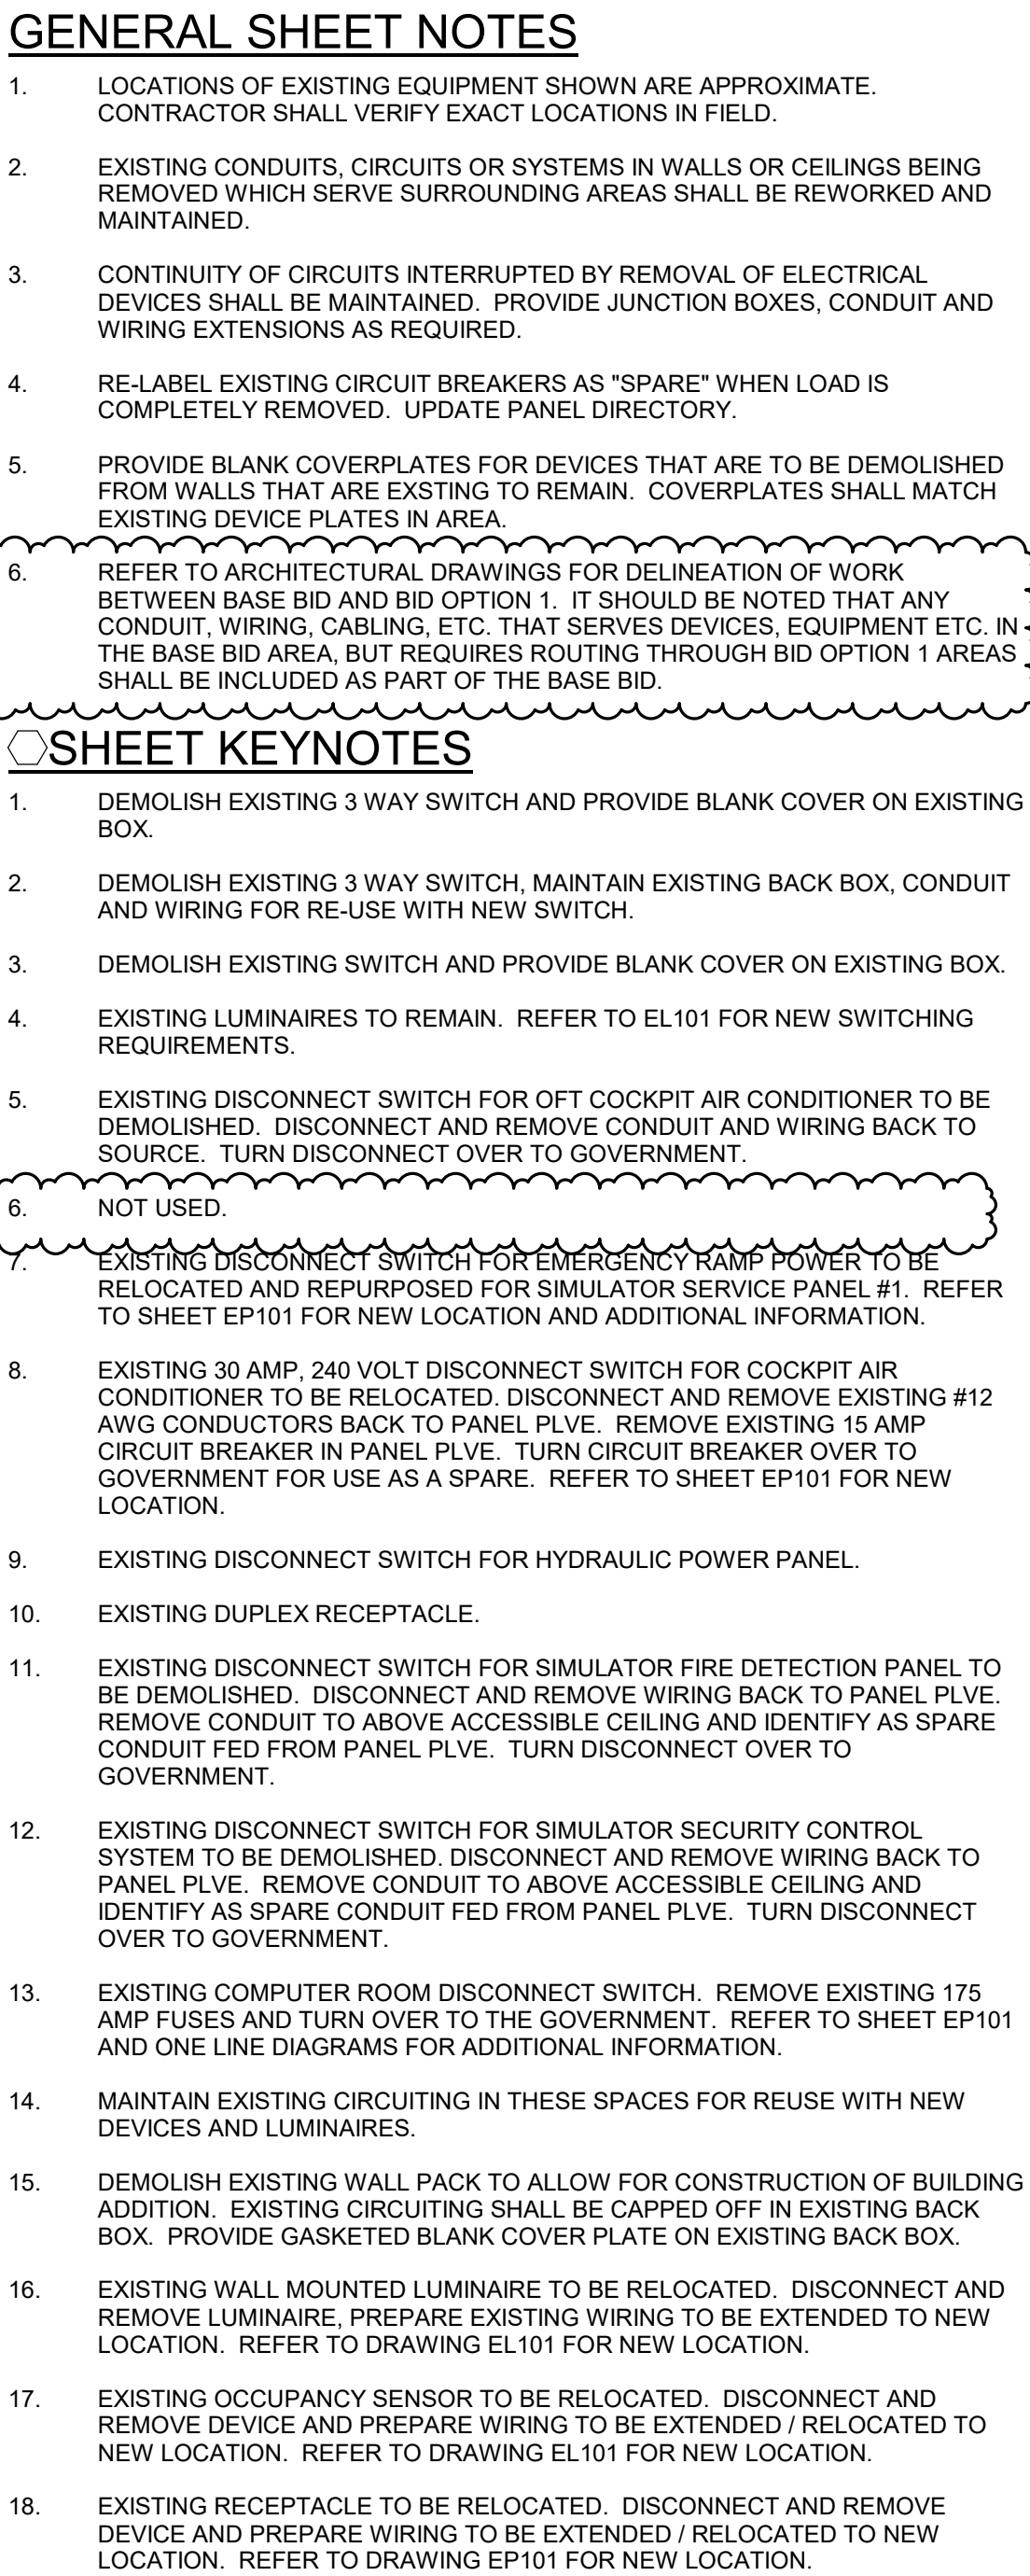
[illegible]


US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE KY 40202-2239	DESIGNED BY: K. HALLER CHECKED BY: K. HALLER SUBMITTED BY: N. ALBAUGH	ISSUE DATE: JUNE 26, 2024 SOLICITATION NO.: CONTRACT NO.:
AEC <i>emersion</i> joint venture		SIZE: ANSI D

BOWST ADDITION AND RENOVATIONS TO B-321
NIAGARA FALLS AIR RESERVE STATION, NY
P2# 508014

SHEET ID

ED101

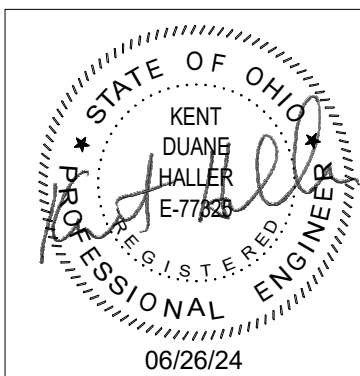

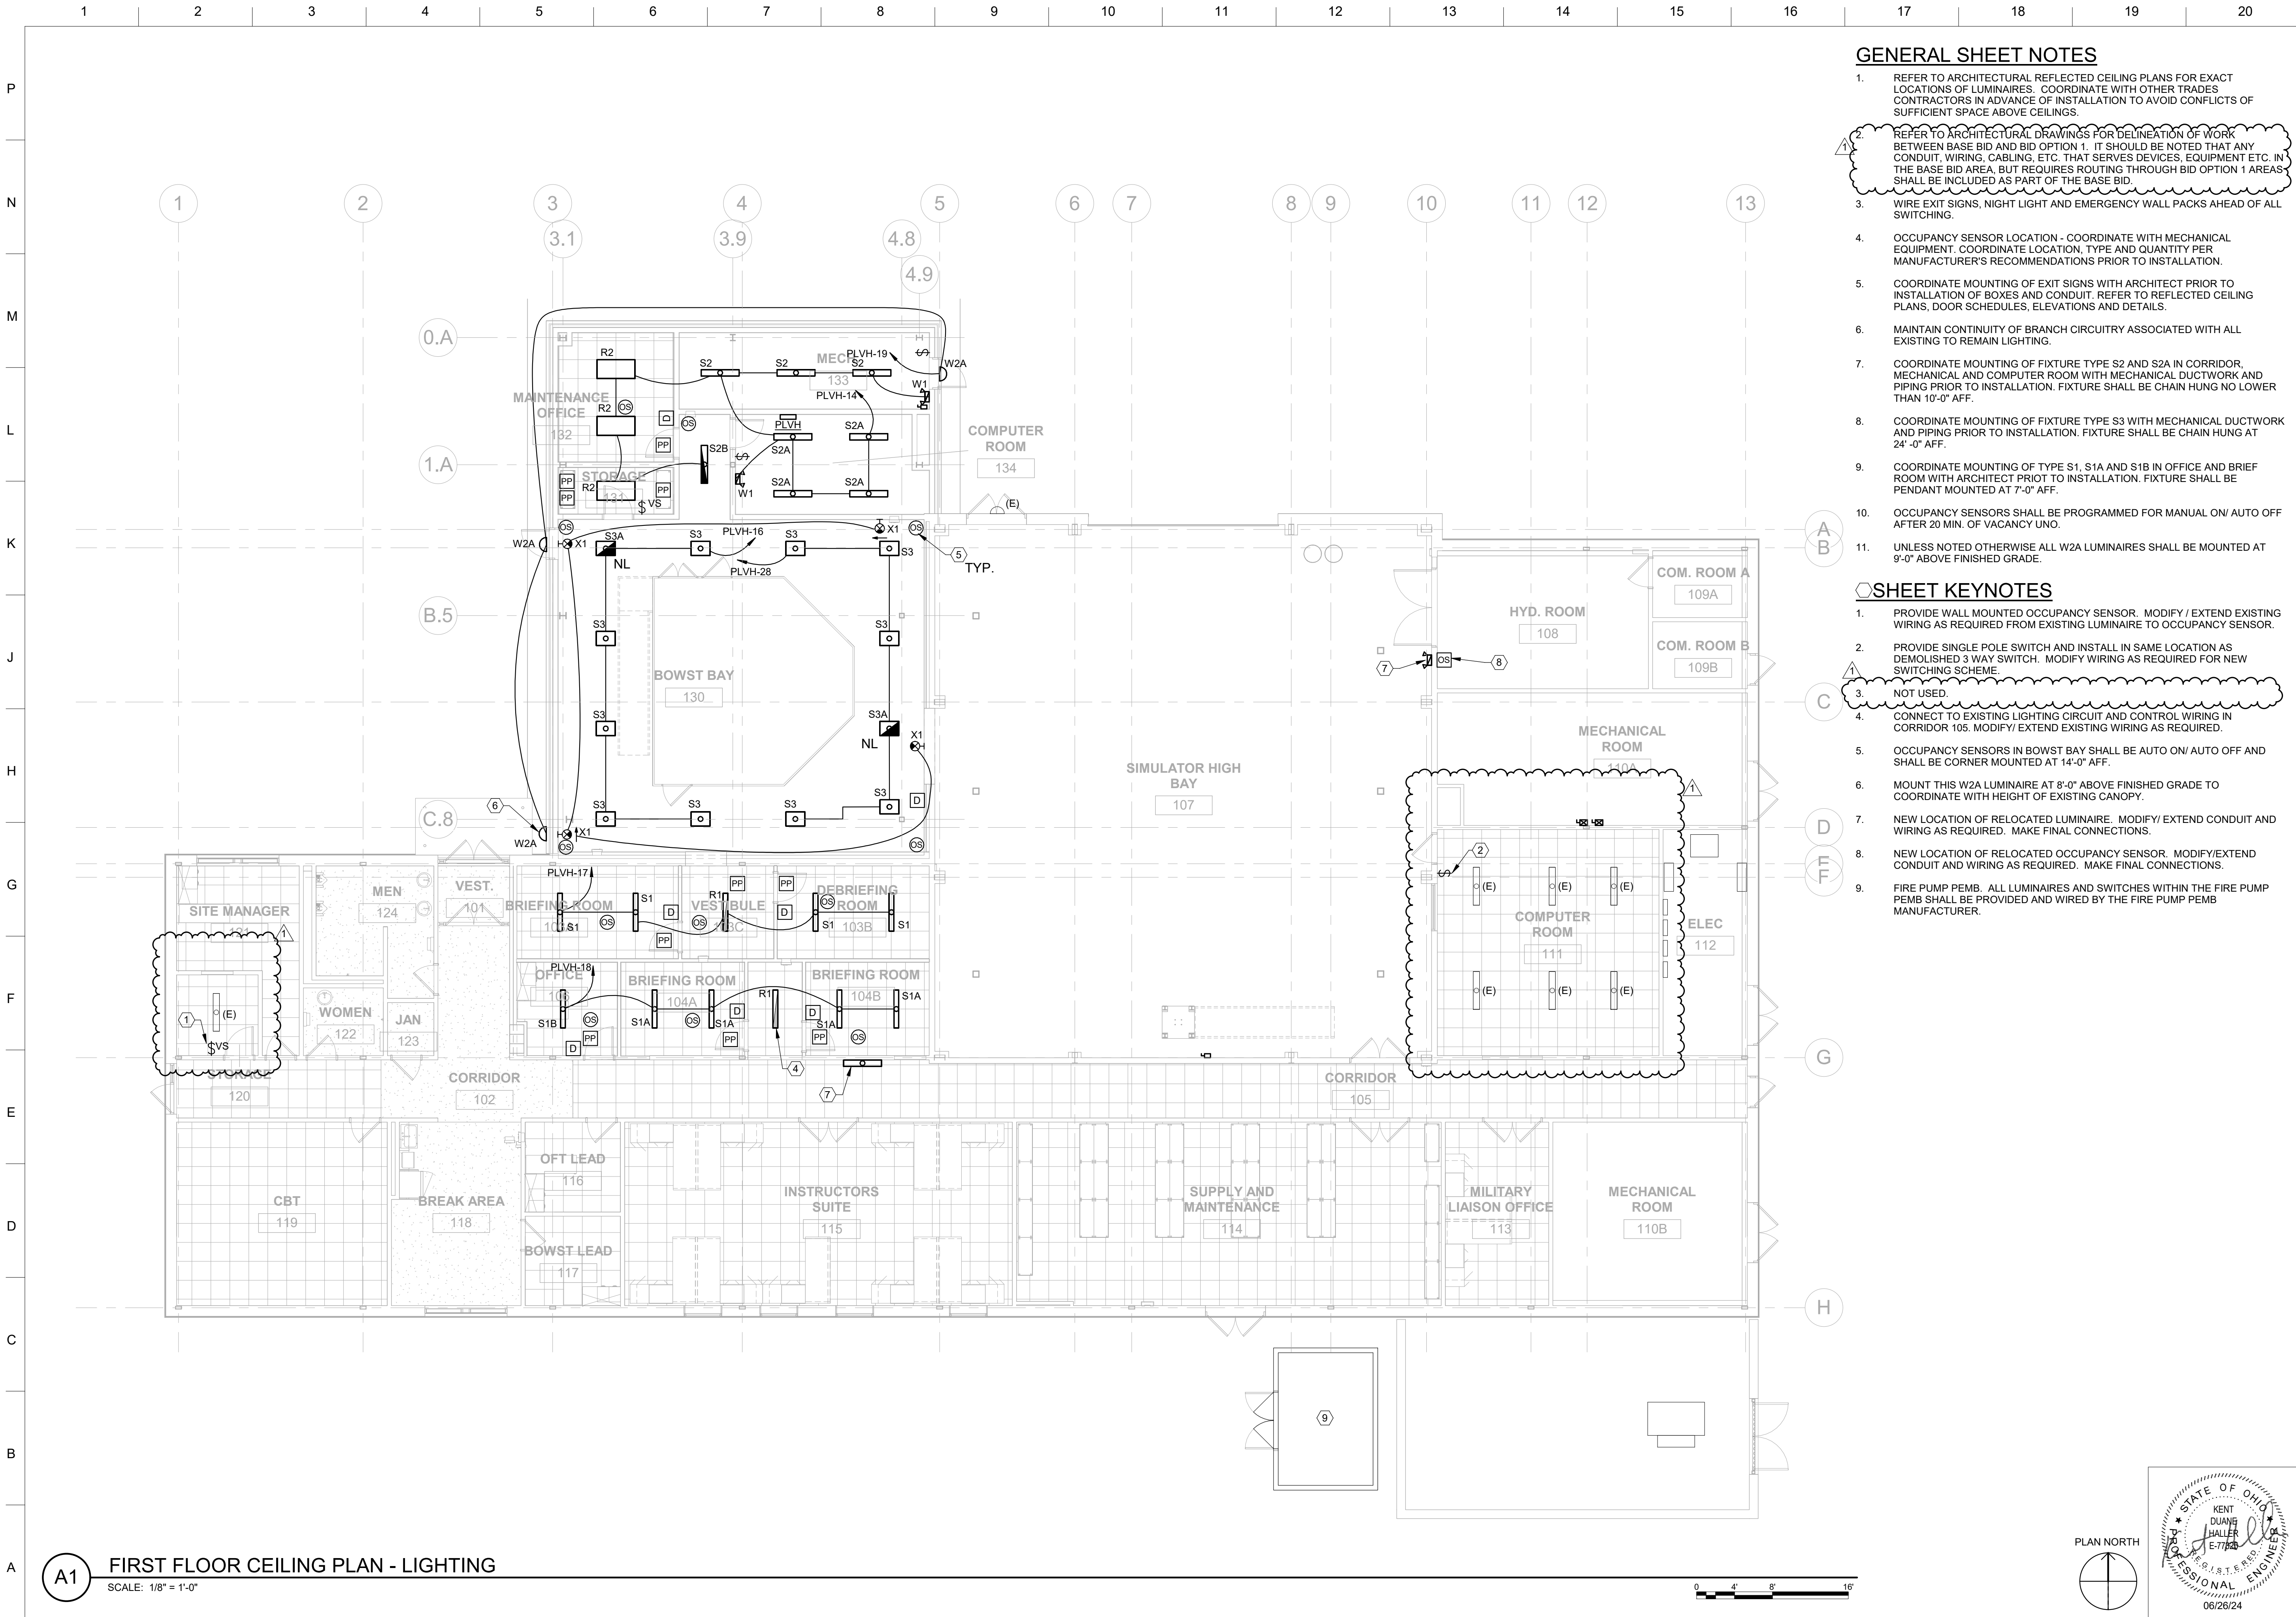


GENERAL SHEET NOTES

- REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF LUMINAIRES. COORDINATE WITH OTHER TRADES CONTRACTORS IN ADVANCE OF INSTALLATION TO AVOID CONFLICTS OF SUFFICIENT SPACE ABOVE CEILINGS.
- REFER TO ARCHITECTURAL DRAWINGS FOR DELINEATION OF WORK BETWEEN BASE BID AND BID OPTION 1. IT SHOULD BE NOTED THAT ANY CONDUIT, WIRING, CABLING, ETC. THAT SERVES DEVICES, EQUIPMENT ETC. IN THE BASE BID AREA, BUT REQUIRES ROUTING THROUGH BID OPTION 1 AREAS SHALL BE INCLUDED AS PART OF THE BASE BID.
- WIRE EXIT SIGNS, NIGHT LIGHT AND EMERGENCY WALL PACKS AHEAD OF ALL SWITCHING.
- OCCUPANCY SENSOR LOCATION - COORDINATE WITH MECHANICAL EQUIPMENT. COORDINATE LOCATION, TYPE AND QUANTITY PER MANUFACTURER'S RECOMMENDATIONS PRIOR TO INSTALLATION.
- COORDINATE MOUNTING OF EXIT SIGNS WITH ARCHITECT PRIOR TO INSTALLATION OF BOXES AND CONDUIT. REFER TO REFLECTED CEILING PLANS, DOOR SCHEDULES, ELEVATIONS AND DETAILS.
- MAINTAIN CONTINUITY OF BRANCH CIRCUITRY ASSOCIATED WITH ALL EXISTING TO REMAIN LIGHTING.
- COORDINATE MOUNTING OF FIXTURE TYPE S2 AND S2A IN CORRIDOR. MECHANICAL AND COMPUTER ROOM WITH MECHANICAL DUCTWORK AND PIPING PRIOR TO INSTALLATION. FIXTURE SHALL BE CHAIN HUNG NO LOWER THAN 10'-0" AFF.
- COORDINATE MOUNTING OF FIXTURE TYPE S3 WITH MECHANICAL DUCTWORK AND PIPING PRIOR TO INSTALLATION. FIXTURE SHALL BE CHAIN HUNG AT 24'-0" AFF.
- COORDINATE MOUNTING OF TYPE S1, S1A AND S1B IN OFFICE AND BRIEF ROOM WITH ARCHITECT PRIOR TO INSTALLATION. FIXTURE SHALL BE PENDANT MOUNTED AT 7'-0" AFF.
- OCCUPANCY SENSORS SHALL BE PROGRAMMED FOR MANUAL ON/ AUTO OFF AFTER 20 MIN. OF VACANCY UNO.
- UNLESS NOTED OTHERWISE ALL W2A LUMINAIRES SHALL BE MOUNTED AT 9'-0" ABOVE FINISHED GRADE.

SHEET KEYNOTES

- PROVIDE WALL MOUNTED OCCUPANCY SENSOR. MODIFY / EXTEND EXISTING WIRING AS REQUIRED FROM EXISTING LUMINAIRE TO OCCUPANCY SENSOR.
- PROVIDE SINGLE POLE SWITCH AND INSTALL IN SAME LOCATION AS DEMOLISHED 3 WAY SWITCH. MODIFY WIRING AS REQUIRED FOR NEW SWITCHING SCHEME.
- NOT USED.
- CONNECT TO EXISTING LIGHTING CIRCUIT AND CONTROL WIRING IN CORRIDOR 105. MODIFY/ EXTEND EXISTING WIRING AS REQUIRED.
- OCCUPANCY SENSORS IN BOWST BAY SHALL BE AUTO ON/ AUTO OFF AND SHALL BE CORNER MOUNTED AT 14'-0" AFF.
- MOUNT THIS W2A LUMINAIRE AT 8'-0" ABOVE FINISHED GRADE TO COORDINATE WITH HEIGHT OF EXISTING CANOPY.
- NEW LOCATION OF RELOCATED LUMINAIRE. MODIFY/ EXTEND CONDUIT AND WIRING AS REQUIRED. MAKE FINAL CONNECTIONS.
- NEW LOCATION OF RELOCATED OCCUPANCY SENSOR. MODIFY/EXTEND CONDUIT AND WIRING AS REQUIRED. MAKE FINAL CONNECTIONS.
- FIRE PUMP PEMB. ALL LUMINAIRES AND SWITCHES WITHIN THE FIRE PUMP PEMB SHALL BE PROVIDED AND WIRED BY THE FIRE PUMP PEMB MANUFACTURER.

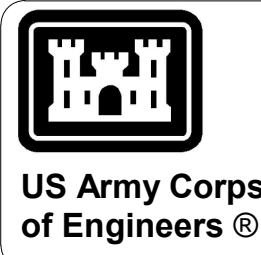




05/21/2025	DATE
1	AMENDMENT 0002
DESCRIPTION	MARK

ISSUE DATE: JUNE 26, 2024	SOLICITATION NO.:	CONTRACT NO.:
DESIGNED BY: K. HALLER	DRAWN BY: K. HALLER	CHECKED BY: N. ALBAUGH
US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE KY 40202-2239	PROFESSIONAL ENGINEER	joint venture

BOWST ADDITION AND RENOVATIONS TO B-321 NIAGARA FALLS AIR RESERVE STATION, NY P2# 508014	FIRST FLOOR PLAN - LIGHTING
--	-----------------------------

SHEET ID
EL101

PLAN NORTH

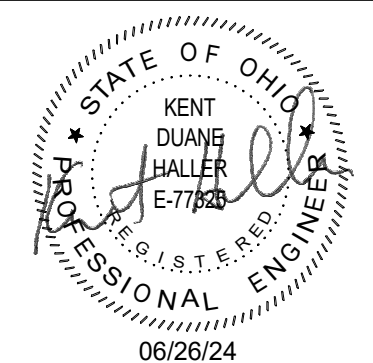

A1 FIRST FLOOR CEILING PLAN - LIGHTING

SCALE: 1/8" = 1'-0"

⬡ SHEET KEYNOTES

- PROVIDE 208 VOLT, 3 PHASE, 100 AMP POWER CONNECTION FROM PANEL PLVH TO BOWSTEP POWER CABINET.

2. PROVIDE GROUND BAR MOUNTED IN TRENCH.

3. NOT USED.

4. FCU-2 (FRACTIONAL HP, 120 VOLT). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION.

5. EXISTING GROUND BAR TO REMAIN.

6. PROVIDE 300 AMP FUSES IN EXISTING DISCONNECT.

7. NEW LOCATION OF RELOCATED DISCONNECT SWITCH FOR OBT COCKPIT AIR CONDITIONER, MODIFY EXTEND CONDUIT AS NEEDED. PROVIDE #10 AWG CONDUCTORS IN EXISTING CONDUIT BACK TO EXISTING PANEL PLVE. PROVIDE 30 AMP CIRCUIT BREAKER IN PANEL PLVE AND INSTALL IN SAME BREAKER SPACE AS DEMOLISHED 15 AMP CIRCUIT BREAKER.

8. PROVIDE 2" CONDUIT ROUTED FROM PANEL PLVH DOWN WALL AND THEN UNDERSLAB TO TRENCH FOR POWER FEED TO POWER CABINET.

9. NEW LOCATION OF DISCONNECT PREVIOUSLY INTENDED TO SERVE AS EMERGENCY RAMP DISCONNECT. MODIFY / EXTEND CONDUIT AS NEEDED. PROVIDE #10 AWG CONDUCTORS IN EXISTING CONDUIT BACK TO PANEL PLVE. RE-LABEL DISCONNECT "SERVICE PANEL #1A". UPDATE PANEL SCHEDULE. SERVICE PANEL 1A SHALL SERVE DIGITAL CONTROLS MODULE (DCM).

10. ACCU-1 (36 MCA, 208 VOLT, 1 PHASE). PROVIDE NEMA 3R, 60 AMP FUSIBLE DISCONNECT SWITCH AND POWER CONNECTION. VERIFY EXACT FUSE SIZE WITH ACTUAL EQUIPMENT SUPPLIED. PROVIDE CONDUIT AND WIRING PER MANUFACTURER'S REQUIREMENTS TO ASSOCIATED INDOOR UNIT.

11. AC UNIT POWERED FROM ASSOCIATED OUTDOOR UNIT. PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION.

12. ACCU-2 (14 MCA, 208 VOLT, 1 PHASE). PROVIDE NEMA 3R, 30 AMP FUSIBLE DISCONNECT SWITCH AND POWER CONNECTION. VERIFY EXACT FUSE SIZE WITH ACTUAL EQUIPMENT SUPPLIED. PROVIDE CONDUIT AND WIRING PER MANUFACTURER'S REQUIREMENTS TO ASSOCIATED INDOOR UNIT.

13. ACCU-3 (18 MCA, 208 VOLT, 1 PHASE). PROVIDE NEMA 3R, 30 AMP FUSIBLE DISCONNECT SWITCH AND POWER CONNECTION. VERIFY EXACT FUSE SIZE WITH ACTUAL EQUIPMENT SUPPLIED. PROVIDE CONDUIT AND WIRING PER MANUFACTURER'S REQUIREMENTS TO ASSOCIATED INDOOR UNIT.

14. ACCU-4 (19 MCA, 208 VOLT, 1 PHASE). PROVIDE NEMA 3R, 30 AMP FUSIBLE DISCONNECT SWITCH AND POWER CONNECTION. VERIFY EXACT FUSE SIZE WITH ACTUAL EQUIPMENT SUPPLIED. PROVIDE CONDUIT AND WIRING PER MANUFACTURER'S REQUIREMENTS TO ASSOCIATED INDOOR UNIT.

15. ERV-1 (4.3 MCA, 208 VOLT, 1 PHASE). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION.

16. EWH (1.5 KW, 208 VOLT, 1 PHASE)

17. CHWP3 AND CHWP4 (1/6 HP, 120 VOLT). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION.

18. EXTEND EXISTING CIRCUITING TO NEW DEVICES. PROVIDE CONDUIT JUNCTION BOXES AND WIRING AS REQUIRED.

19. EXISTING RECEPTACLE TO REMAIN. SHOWN HERE FOR REFERENCE ONLY.

20. PROVIDE L5-30 RECEPTACLE ADJACENT TO CABINET IN OBT COMPUTER ROOM. VERIFY EXACT LOCATION WITH SIMULATOR INSTALLER PRIOR TO ROUGH-IN.

21. CONDENSATE PUMP (208 VOLT, 1 PHASE). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND CONDUIT AND WIRING FROM AC-3. MAKE FINAL CONNECTIONS.

22. PROVIDE 480 VOLT, 3 POLE, 60 AMP FUSIBLE DISCONNECT FOR OVERHEAD CRANE. COORDINATE EXACT LOCATION IN FIELD PRIOR TO ROUGH-IN. VERIFY FUSING SIZES WITH EQUIPMENT PROVIDED. PROVIDE CONDUIT AND WIRING FROM DISCONNECT TO CRANE. MAKE ALL FINAL CONNECTIONS.

23. DP-1 DRAIN PUMP (1/2 HP, 120 VOLT). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION.

24. HUMIDIFIER, H-1 (3.7 KW, 208 VOLT, 1 PHASE). PROVIDE 30 AMP NON-FUSED DISCONNECT SWITCH AND POWER CONNECTION.

25. HUMIDIFIER, H-2 (1.1 KW, 208 VOLT, 1 PHASE). PROVIDE 30 AMP NON-FUSED DISCONNECT SWITCH AND POWER CONNECTION.

26. FCU-1 (COCKPIT AIR CONDITIONER) SHALL BE GFI AND IS SHOWN HERE FOR REFERENCE ONLY.

27. PROVIDE 120 VOLT POWER CONNECTION AND DISCONNECT SWITCH LABELED "SERVICE PANEL 1B" FOR TRAINER FIRE ALARM PANEL.

28. NEW LOCATION OF RELOCATED RECEPTACLE. MODIFY / EXTEND CONDUIT AND WIRING AS REQUIRED. MAKE FINAL CONNECTIONS.

29. TRANSFORMER SHALL BE WALL MOUNTED OR SUSPENDED FROM STRUCTURE.

30. RADON EXHAUST FAN (58 WATTS, 120 VOLT). PROVIDE MOTOR RATED TOGGLE TYPE DISCONNECT SWITCH AND POWER CONNECTION. VERIFY EXACT LOCATION PRIOR TO ROUGH-IN.

31. FIRE PUMP PEMB. UNLESS NOTED OTHERWISE ALL ELECTRICAL CONNECTIONS TO EQUIPMENT INCLUDED IN THE PEMB SHALL BE FACTORY PROVIDED.


32. FIRE PUMP CONTROLLER. PROVIDE POWER CONNECTION FROM UTILITY TRANSFORMER. REFER TO ONE-LINE DIAGRAM FOR ADDITIONAL INFORMATION.

33. JOCKEY PUMP CONTROLLER.

34. MINI-POWER ZONE PROVIDED WITH FIRE PUMP BUILDING. PROVIDE POWER CONNECTION. COORDINATE EXACT REQUIREMENTS WITH FIRE PUMP PEMB PROVIDER.



CERTIFIED FINAI W9120R25BA008 Plans-0002

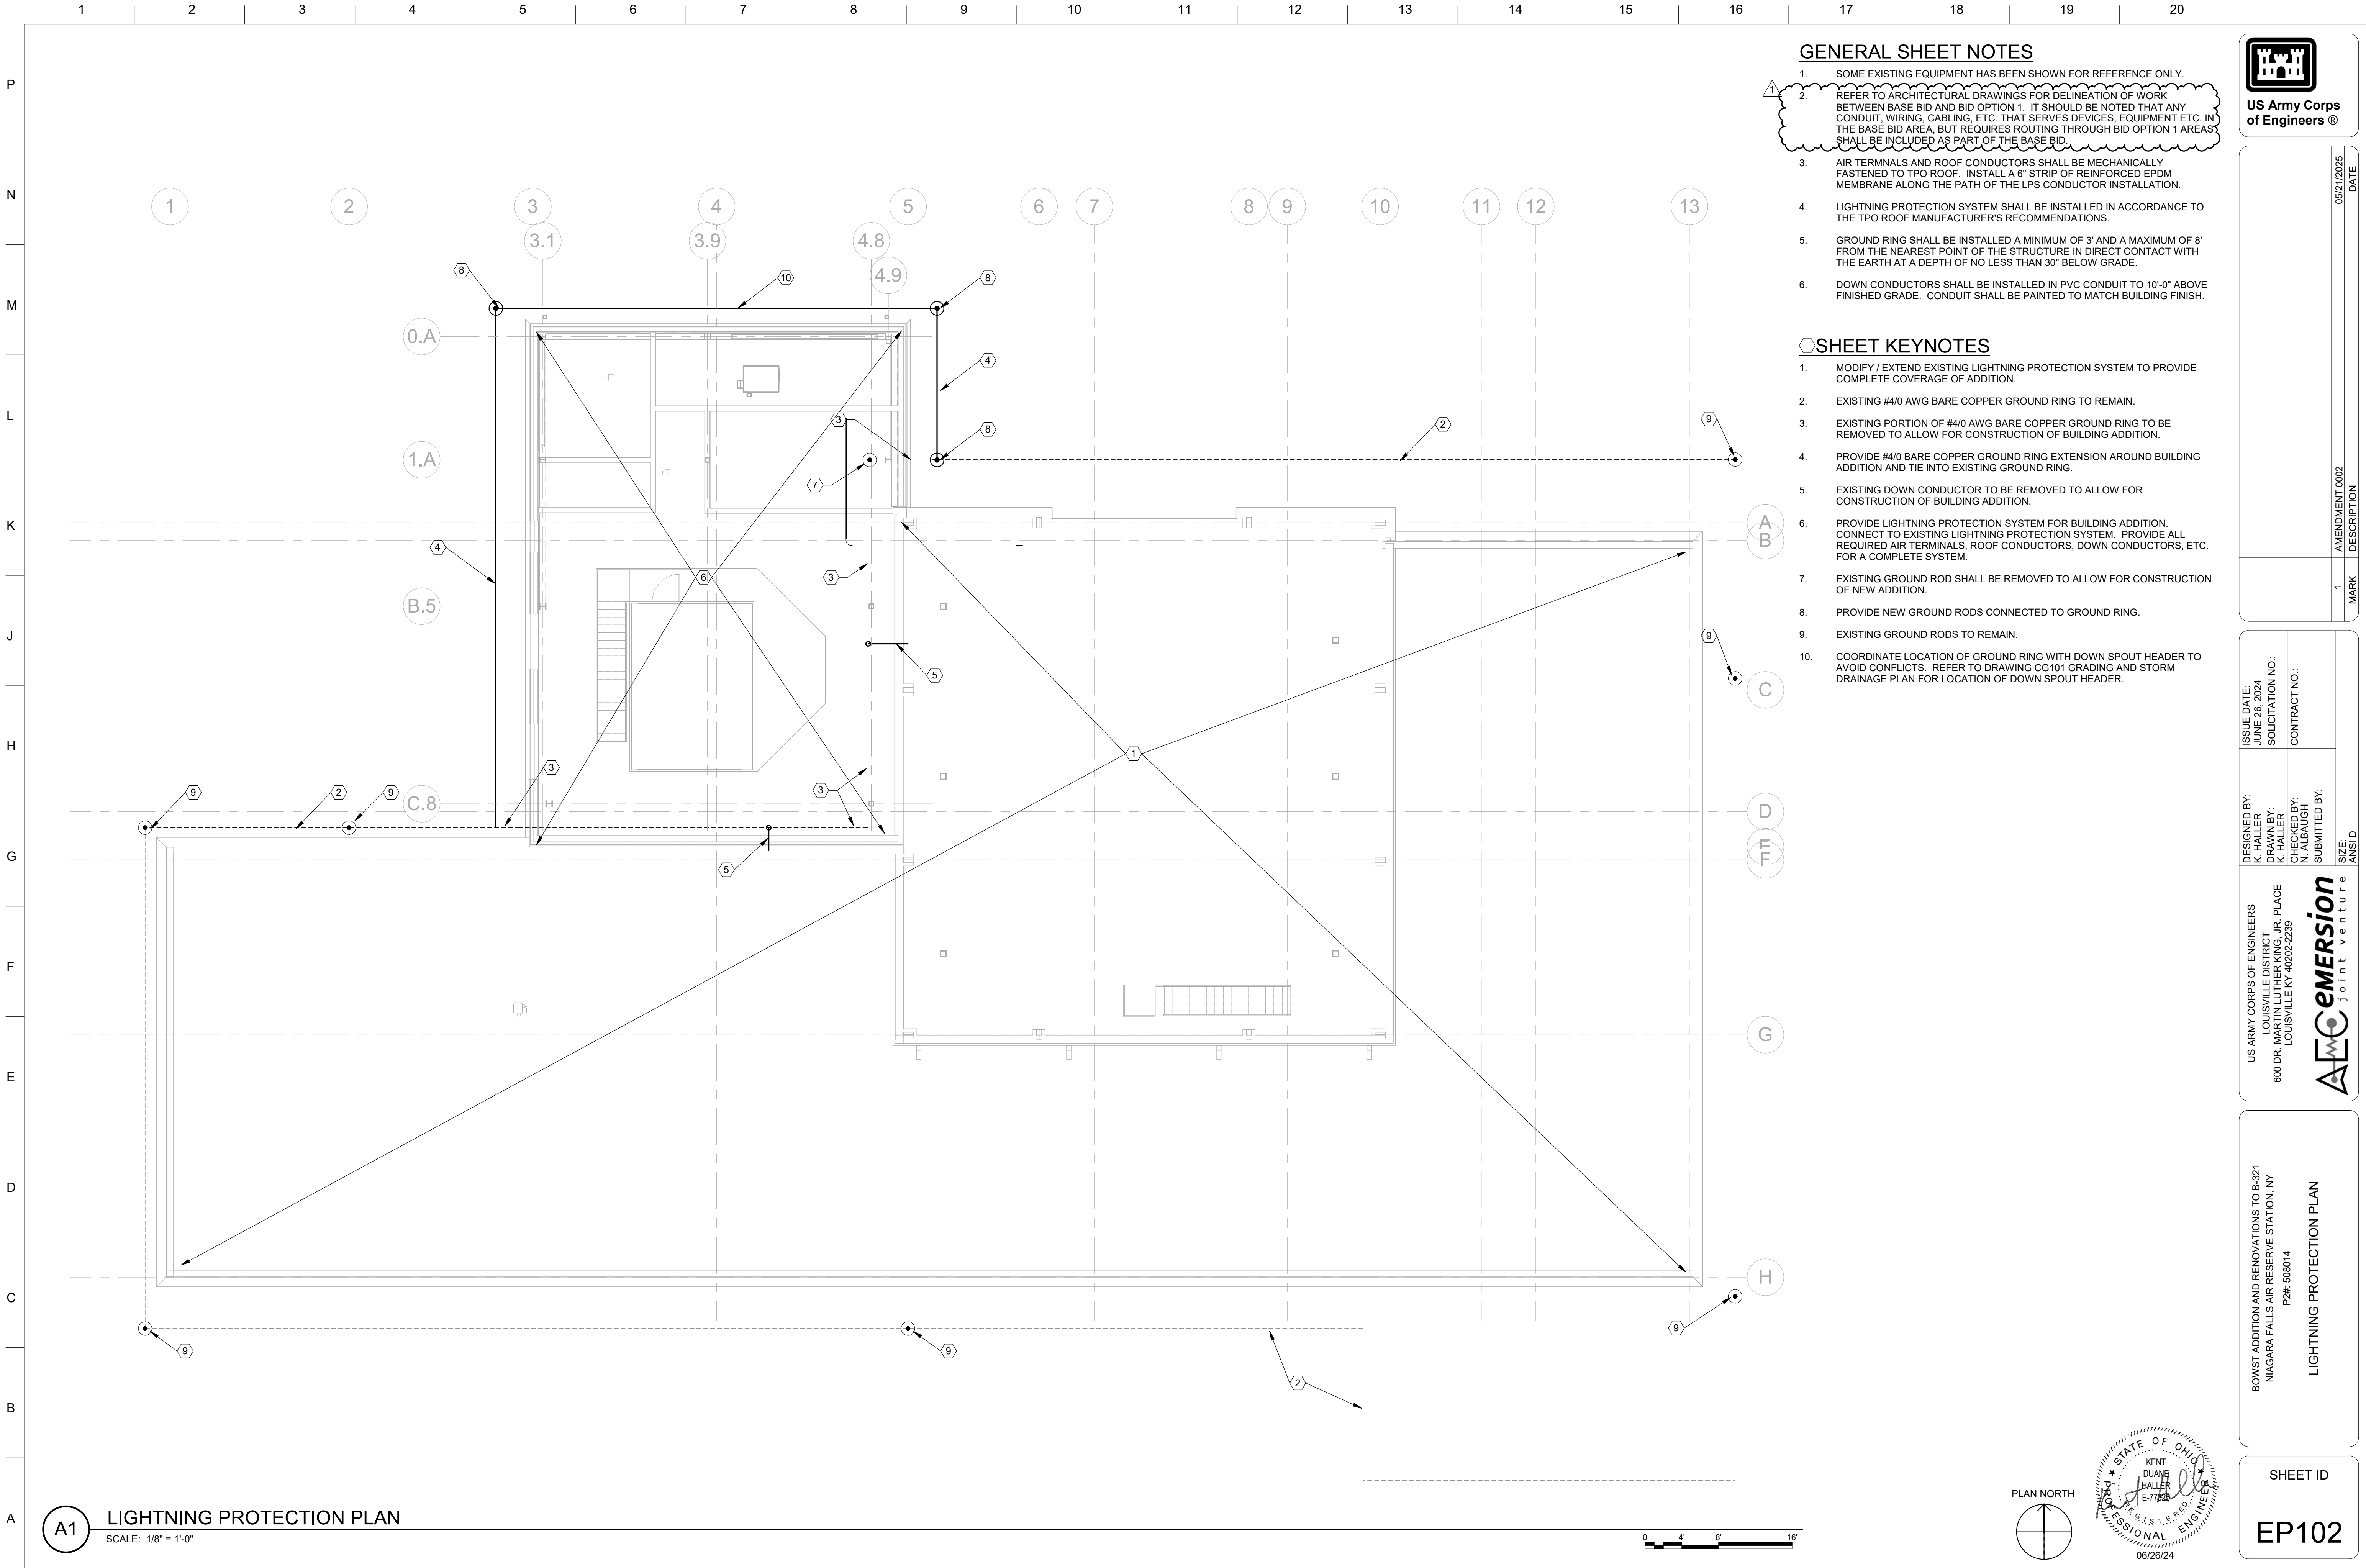



1. PROVIDE QUANTITY AND SIZE OF LUGS REQUIRED TO ACCOMMODATE CABLE SIZES SHOWN.
2. REFER TO SITE PLAN AND FLOOR PLAN DRAWINGS FOR ADDITIONAL INFORMATION.
3. REFER TO ARCHITECTURAL DRAWINGS FOR DELINEATION OF WORK BETWEEN BASE BID OPTION 1. IT SHOULD BE NOTED THAT ANY CONDUIT, WIRING, CABLEING, ETC. THAT SERVES DEVICES, EQUIPMENT ETC. IN THE BASE BID AREA, BUT REQUIRES ROUTING THROUGH BID OPTION 1 AREAS SHALL BE INCLUDED AS PART OF THE BASE BID.

1. PROVIDE NEW CIRCUIT BREAKER IN LOCATION OF EXISTING "SPACE" FOR FEEDER TO NEW PANELBOARD. NEW BREAKER SHALL MATCH MANUFACTURER TYPE AND AIC RATING FOR EXISTING PANEL. PANEL IS A GE SPECTRA SERIES WITH APNBE HEAT RATED BOLT-ON STYLE BREAKERS, RATED AT 42 KAIC.
2. REMOVE AND REPLACE EXISTING 175 AMP FUSES AND PROVIDE 300 AMP FUSES.
3. EXISTING PANEL BOARD HAS BRANCH CIRCUIT MODIFICATIONS. REFER TO FLOOR PLANS AND PANEL SCHEDULE FOR ADDITIONAL INFORMATION.
4. COORDINATE EXACT FUSE SIZES WITH EQUIPMENT SUPPLIED.
5. PROVIDE CONDUIT AND WIRING FROM SECONDARY OF EXISTING PAD MOUNTED TRANSFORMER TO NEW FIRE PUMP CONTROLLER.
6. UTILIZE EXISTING SPARE CIRCUIT BREAKER FOR FEED TO NEW MINI-POWER ZONE IN FIRE PUMP PEMB.


NOTES:


IF CONDUIT OR CONDUCTOR SIZE ARE NOT INDICATED, SELECT FROM THE FEEDER SCHEDULE TABLE ABOVE.


NOT ALL SIZES SHOWN ARE USED.

"CONDUIT SIZES SHOWN ARE BASED ON EMT TYPE, AND CONDUCTORS WITH THHN, THWN, OR XHHW INSULATION. CONTRACT SHALL COMPLY WITH NEC FILL RATIOS IF ANY OTHER TYPE COMBINATIONS ARE USED."

AMPACTY SHOWN IS THE NOMINAL REQUIRED FOR CONDUCTORS INDICATED. CONDUCTORS WITH HIGHER CURRENT RATINGS MAY BE SHOWN ON THE DRAWINGS TO ACCOUNT FOR VOLTAGE DROP OR FOR FUTURE EXPANSION.



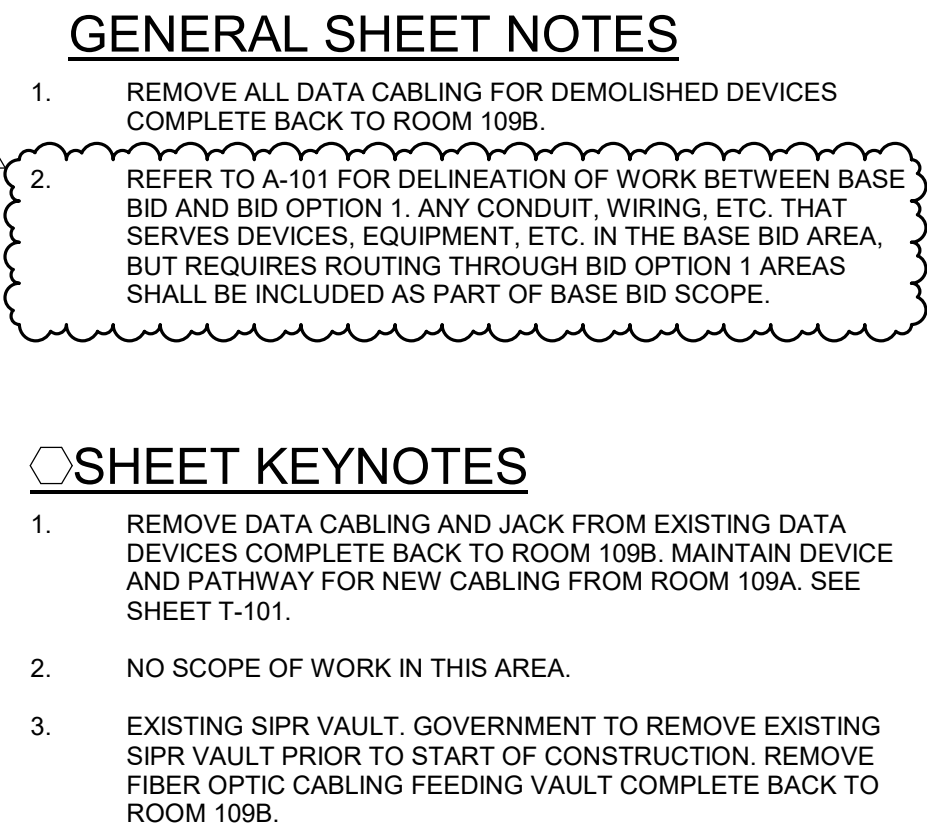[illegible]

	US ARMY CORPS OF ENGINEERS LOUISVILLE DISTRICT 600 DR. MARTIN LUTHER KING JR. PLACE LOUISVILLE KY 40202-2239		DESIGNED BY: C. BRIGGS	ISSUE DATE: JUNE 26, 2024
			DRAWN BY: C. BRIGGS	SOLICITATION NO.: CONTRACT NO.: SUBMITTED BY:
		SIZE: ANSI D		

BOWST ADDITION AND RENOVATIONS TO B-321
NIAGARA FALLS AIR RESERVE STATION, NY
PZ#: 508014

SHEET ID

TD101


CERTIFIED FINAL W912QR25BA008 Plans-0002


Plot Date: 5/20/2025 7:54:47 AM

File Path:

Autodesk Docs://NFARS BOWST Addition/NFARS BOWST ADD - v22 - FET.m

A1 FIRST FLOOR PLAN - TELECOMMUNICATIONS - DEMOLITION
SCALE: 1/8" = 1'-0"

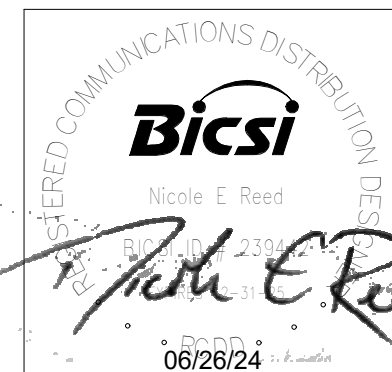

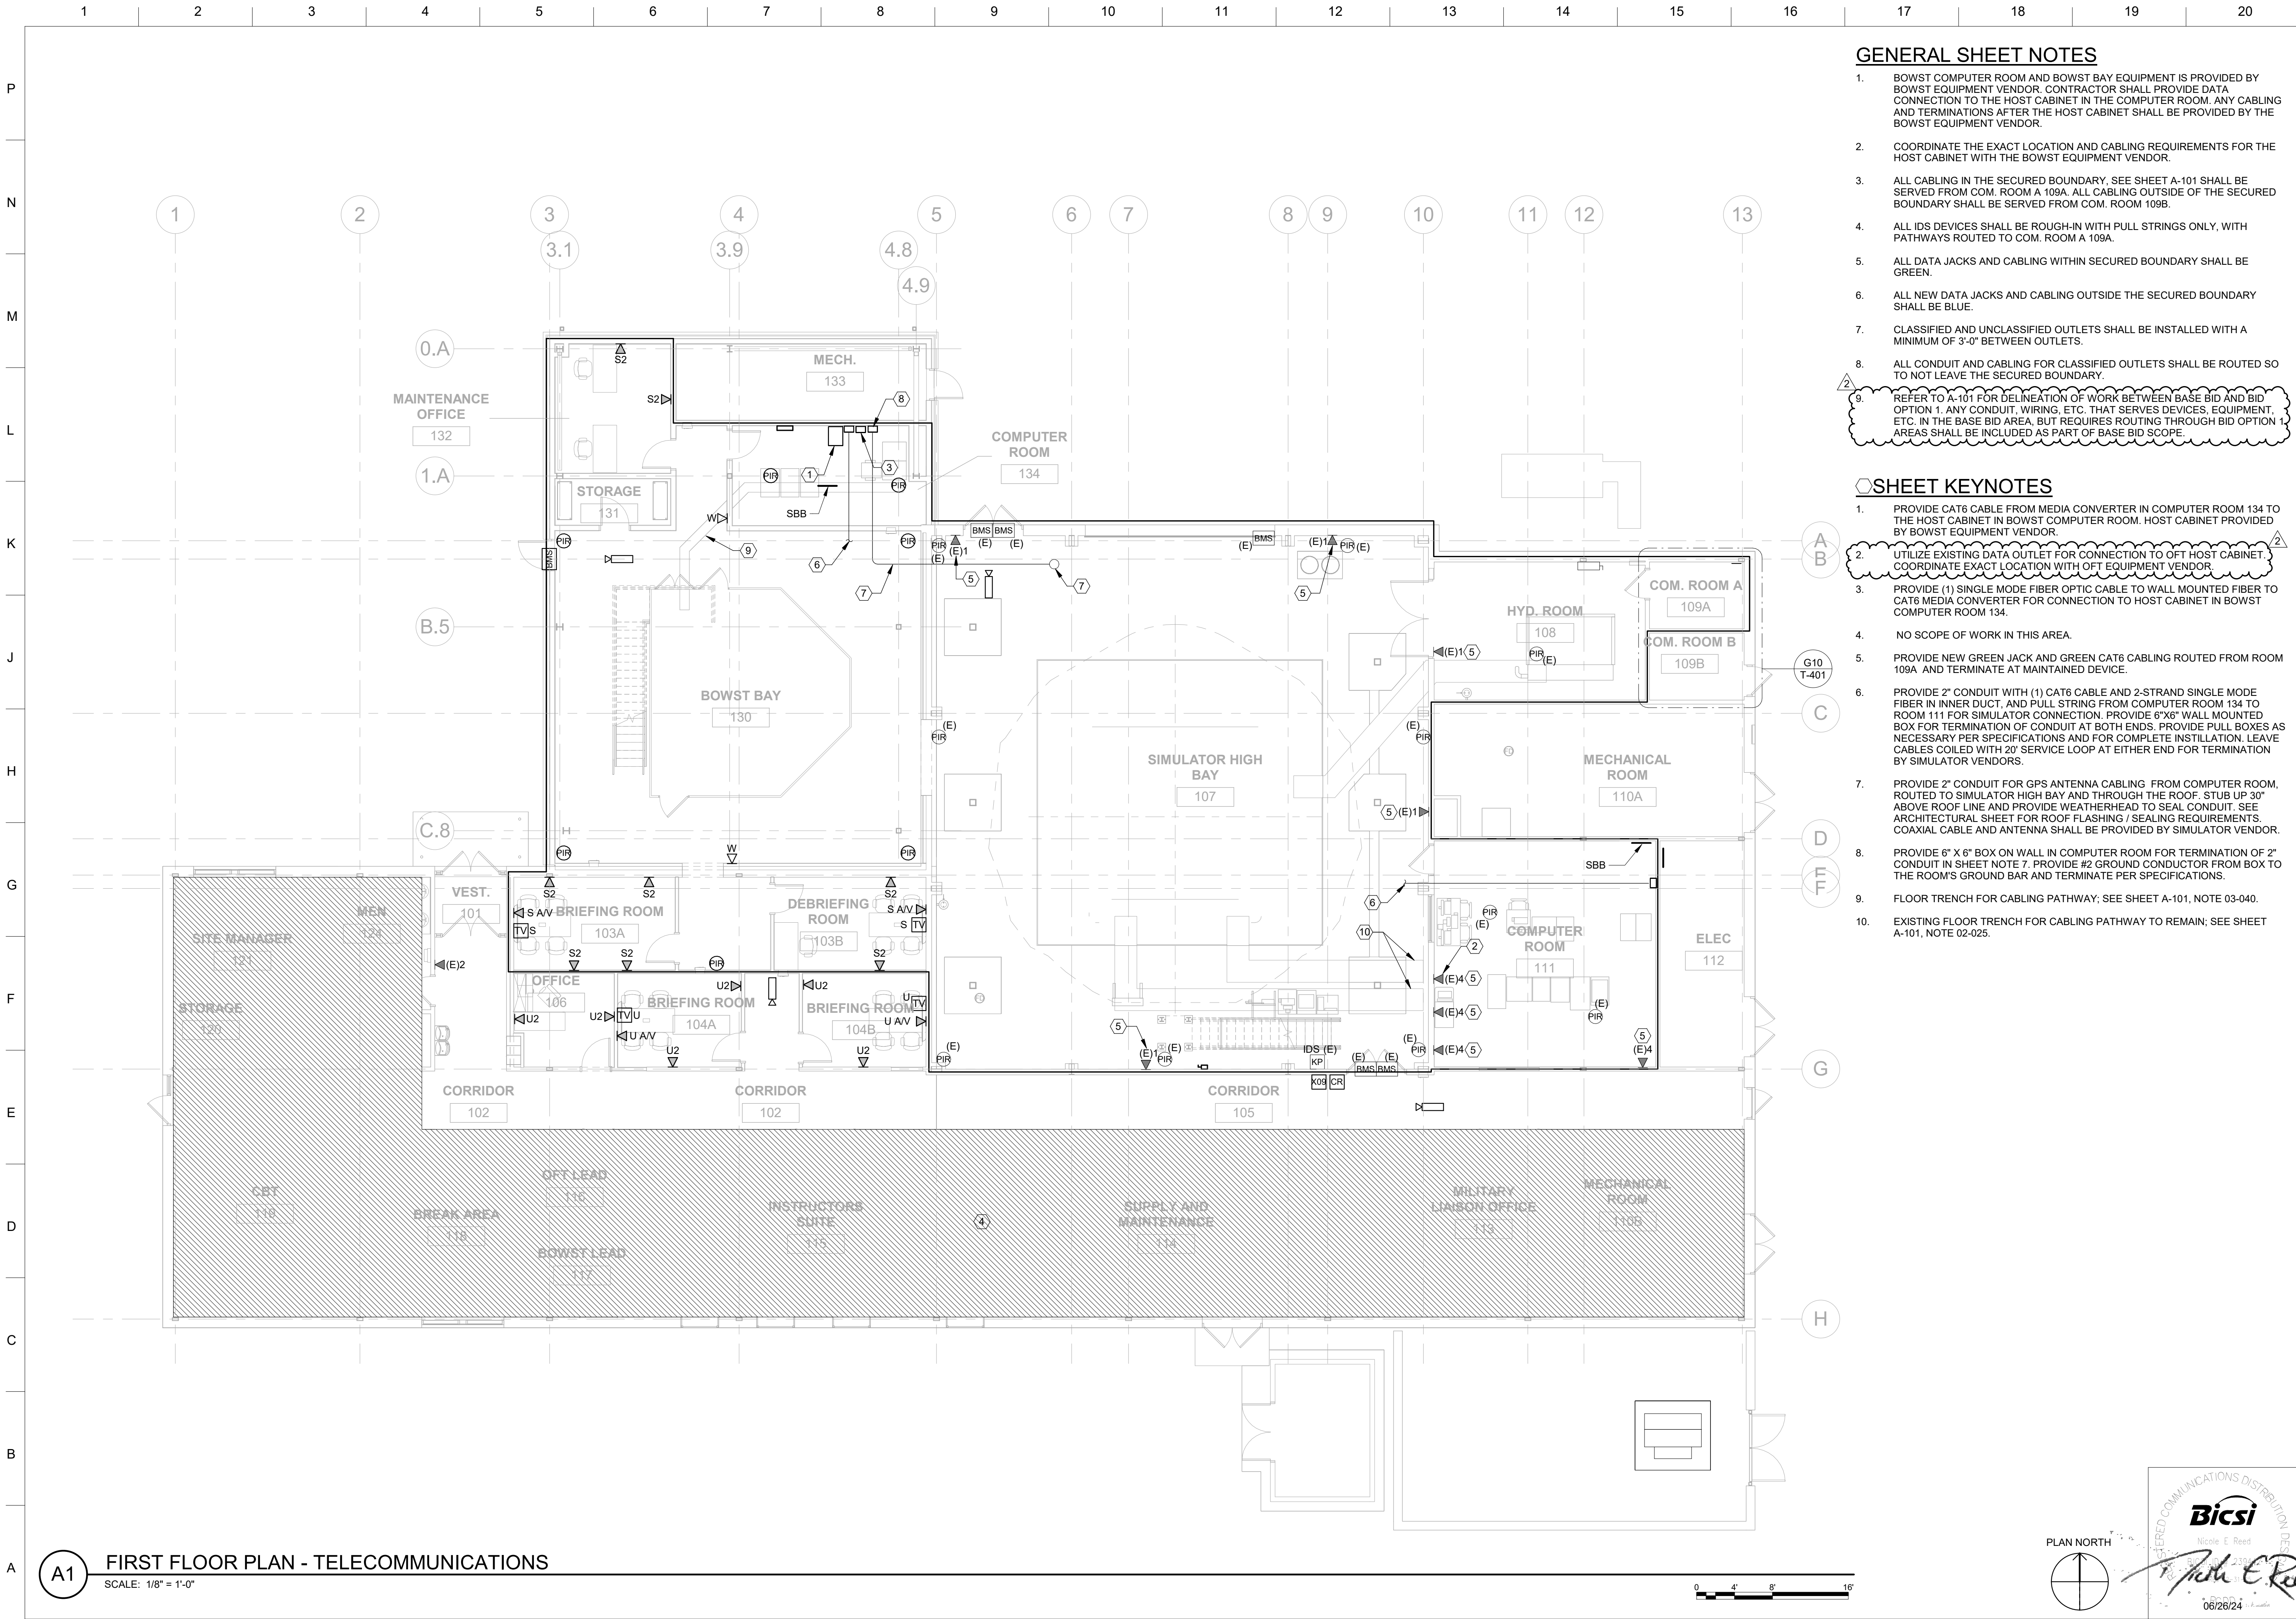


GENERAL SHEET NOTES

1. BOWST COMPUTER ROOM AND BOWST BAY EQUIPMENT IS PROVIDED BY BOWST EQUIPMENT VENDOR. CONTRACTOR SHALL PROVIDE DATA CONNECTION TO THE HOST CABINET IN THE COMPUTER ROOM. ANY CABLING AND TERMINATIONS AFTER THE HOST CABINET SHALL BE PROVIDED BY THE BOWST EQUIPMENT VENDOR.
2. COORDINATE THE EXACT LOCATION AND CABLING REQUIREMENTS FOR THE HOST CABINET WITH THE BOWST EQUIPMENT VENDOR.
3. ALL CABLING IN THE SECURED BOUNDARY, SEE SHEET A-101 SHALL BE SERVED FROM COM. ROOM A 109A. ALL CABLING OUTSIDE OF THE SECURED BOUNDARY SHALL BE SERVED FROM COM. ROOM 109B.
4. ALL IDS DEVICES SHALL BE ROUGH-IN WITH PULL STRINGS ONLY, WITH PATHWAYS ROUTED TO COM. ROOM A 109A.
5. ALL DATA JACKS AND CABLING WITHIN SECURED BOUNDARY SHALL BE GREEN.
6. ALL NEW DATA JACKS AND CABLING OUTSIDE THE SECURED BOUNDARY SHALL BE BLUE.
7. CLASSIFIED AND UNCLASSIFIED OUTLETS SHALL BE INSTALLED WITH A MINIMUM OF 3'-0" BETWEEN OUTLETS.
8. ALL CONDUIT AND CABLING FOR CLASSIFIED OUTLETS SHALL BE ROUTED SO TO NOT LEAVE THE SECURED BOUNDARY.
9. REFER TO A-101 FOR DELINEATION OF WORK BETWEEN BASE BID AND BID OPTION 1. ANY CONDUIT, WIRING, ETC. THAT SERVES DEVICES, EQUIPMENT, ETC. IN THE BASE BID AREA, BUT REQUIRES ROUTING THROUGH BID OPTION AREAS SHALL BE INCLUDED AS PART OF BASE BID SCOPE.

SHEET KEYNOTES

1. PROVIDE CAT6 CABLE FROM MEDIA CONVERTER IN COMPUTER ROOM 134 TO THE HOST CABINET IN BOWST COMPUTER ROOM. HOST CABINET PROVIDED BY BOWST EQUIPMENT VENDOR.
2. UTILIZE EXISTING DATA OUTLET FOR CONNECTION TO OFT HOST CABINET. COORDINATE EXACT LOCATION WITH OFT EQUIPMENT VENDOR.
3. PROVIDE (1) SINGLE MODE FIBER OPTIC CABLE TO WALL MOUNTED FIBER TO CAT6 MEDIA CONVERTER FOR CONNECTION TO HOST CABINET IN BOWST COMPUTER ROOM 134.
4. NO SCOPE OF WORK IN THIS AREA.
5. PROVIDE NEW GREEN JACK AND GREEN CAT6 CABLING ROUTED FROM ROOM 109A AND TERMINATE AT MAINTAINED DEVICE.
6. PROVIDE 2" CONDUIT WITH (1) CAT6 CABLE AND 2-STRAND SINGLE MODE FIBER IN INNER DUCT, AND PULL STRING FROM COMPUTER ROOM 134 TO ROOM 111 FOR SIMULATOR CONNECTION. PROVIDE 6"x6" WALL MOUNTED BOX FOR TERMINATION OF CONDUIT AT BOTH ENDS. PROVIDE PULL BOXES AS NECESSARY PER SPECIFICATIONS AND FOR COMPLETE INSTALLATION. LEAVE CABLES COILED WITH 20' SERVICE LOOP AT EITHER END FOR TERMINATION BY SIMULATOR VENDORS.
7. PROVIDE 2" CONDUIT FOR GPS ANTENNA CABLING FROM COMPUTER ROOM, ROUTED TO SIMULATOR HIGH BAY AND THROUGH THE ROOF. STUB UP 30" ABOVE ROOF LINE AND PROVIDE WEATHERHEAD TO SEAL CONDUIT. SEE ARCHITECTURAL SHEET FOR ROOF FLASHING / SEALING REQUIREMENTS. COAXIAL CABLE AND ANTENNA SHALL BE PROVIDED BY SIMULATOR VENDOR.
8. PROVIDE 6" X 6" BOX ON WALL IN COMPUTER ROOM FOR TERMINATION OF 2" CONDUIT IN SHEET NOTE 7. PROVIDE #2 GROUND CONDUCTOR FROM BOX TO THE ROOM'S GROUND BAR AND TERMINATE PER SPECIFICATIONS.
9. FLOOR TRENCH FOR CABLING PATHWAY; SEE SHEET A-101, NOTE 03-040.
10. EXISTING FLOOR TRENCH FOR CABLING PATHWAY TO REMAIN; SEE SHEET A-101, NOTE 02-025.



US Army Corps
of Engineers®

05/21/2025	05/14/2025	DATE
AMENDMENT 0002	AMENDMENT 0001	DESCRIPTION
2	1	MARK

ISSUE DATE:	JUNE 26, 2024
DESIGNED BY:	C. BRIGGS
DRAWN BY:	C. BRIGGS
CHECKED BY:	N. REED
SUBMITTED BY:	ANSD
SIZE:	ANSI D

SOLICITATION NO.:	CONTRACT NO.:
600 DR. MARTIN LUTHER KING, JR. PLACE LOUISVILLE KY 40202-2239	

US ARMY CORPS OF ENGINEERS
LOUISVILLE DISTRICT
600 DR. MARTIN LUTHER KING, JR. PLACE
LOUISVILLE KY 40202-2239

AECOM **emersion**
joint venture

BOWST ADDITION AND RENOVATIONS TO B-321
NIAGARA FALLS AIR RESERVE STATION, NY
P2#: 506014

FIRST FLOOR PLAN - TELECOMMUNICATIONS

SHEET ID
T-101

