# CS 422 HW3 Report: eBPF Congestion Control (Option 1)

Repository: CS422-Networks-Group/HW3 (branch `hw3-cleanup`). Raw measurements: `results/`. Dependencies and reproduction: README.

We implemented our HW2 Q3(b) algorithm, **dgcc** (delay + goodput congestion control), as an eBPF `struct_ops` `tcp_congestion_ops` program (`bpf/dgcc.bpf.c`) and compared it with CUBIC, Reno, and BBR using our HW2 Python client (`src/main.py`).

## 1. Kernel, required features, build and load

| | |
|---|---|
| Kernel | `6.6.87.2-microsoft-standard-WSL2` (Ubuntu 24.04.2 on WSL2, x86_64) |
| Required features | `CONFIG_BPF_SYSCALL=y`, `CONFIG_BPF_JIT=y`, `CONFIG_DEBUG_INFO_BTF=y`; kernel ≥ 5.6 for BPF congestion control; `tcp_bbr` module for the BBR baseline |
| Toolchain | Ubuntu clang 18.1.3, libbpf-dev 1.3.0, bpftool from `linux-tools-generic` 6.8.0-147 |

```
sudo apt install -y clang llvm libbpf-dev linux-tools-common linux-tools-generic make python3-venv
make -C bpf             # build bpf/dgcc.bpf.o
sudo make -C bpf load   # register dgcc, load tcp_bbr, allow all four algorithms
cat /proc/sys/net/ipv4/tcp_available_congestion_control   # reno cubic bbr dgcc
sudo make -C bpf unload
```

**Selecting and recording the algorithm.** `set_congestion_control()` sets `TCP_CONGESTION` on the data socket before `connect()`. After the transfer, `iperf3_test()` reads it back from the connection and stores it with every sample. All 60 tests used the requested algorithm.

## 2. Implementation

The HW2 Q3(b) pseudocode:

```
Start up with the minimum window size

ONCE EVERY ROUND TRIP
  1. Measure:
     - base delay    = fastest round trip seen recently
     - current delay = smoothed round trip time
     - extra delay   = how far current delay is above base delay
     - goodput       = how much data got through this round trip

  2. If the connection timed out:
       Shrink window to minimum, go back to start-up mode.

  3. Else if packets were lost:
       If extra delay is large → shrink window to 60% (a real queue built up)
       If extra delay is small → shrink window to 90% (probably random loss)
       Leave start-up mode.

  4. Else if in start-up mode:
       If extra delay is getting noticeable → leave start-up mode
       Otherwise → double the window

  5. Else (normal operation):
       If extra delay is below target:
           Grow the window by a few packets.
           Grow more when far below target, less when close to it.
           If the last increase didn't raise goodput → grow only slightly.
       If extra delay is above target:
           Shrink the window by a percentage.
           Shrink more the further above target it is (never more than half).

  6. Never let the window be smaller than the minimum window size
     or bigger than about twice what the path can hold.
```

### 2.1 How cwnd is updated from RTT, loss, and throughput

dgcc changes cwnd (measured in segments) once per round trip, called a *round*. The kernel calls `dgcc_cong_control` on every ACK, which records that round's lowest RTT and any losses. When the round ends, it calls `dgcc_round()` to decide the new cwnd.

**What dgcc measures each round** (L173–L192, L180–L186):

- **Base delay:** the lowest RTT seen recently, i.e. our estimate of the path's delay when no queue has built up. A round with a lower RTT replaces it. If the base delay is more than 10 s old, it is replaced by the current round's lowest RTT, so it can follow a path that changes.
- **Extra delay:** the smoothed RTT (a running average of RTT samples that weights the newest ones most) minus the base delay. This is roughly how long our packets wait in queues.
- **Target:** the extra delay dgcc accepts, equal to the base delay / 8, but at least 2 ms and at most 20 ms. For example, a 110 ms base delay gives a 13.75 ms target.

- **Goodput:** the data acknowledged during the round, divided by the round's length.

**How cwnd changes.** The rules are checked in this order, and only the first one that applies is used:

1. **Timeout** (`dgcc_set_state`): if the connection times out, cwnd drops to 4 segments and dgcc goes back to start-up. This happens immediately, not at the end of the round.
2. **Loss** (L198–L208): if any packet was lost during the round, cwnd is cut to 60% when the extra delay is above the target (a queue overflowed), or to 90% otherwise (the loss was probably random). Start-up ends.
3. **Start-up** (L209–L214, L264–L267): at the start of a connection, dgcc doubles cwnd every round so it finds the path's capacity quickly. It spreads the doubling over the round: each ACK adds as many segments to cwnd as it acknowledges, so by the end of a round cwnd has grown by a full window. Start-up ends as soon as the extra delay reaches half the target (about 7 ms on a 110 ms path), because that means a queue is starting to form.
4. **Extra delay below the target** (L215–L221): cwnd grows by 8 segments when there is no extra delay, shrinking linearly to 2 segments as the extra delay approaches the target. **Throughput check** (L218–L219): if the previous round also grew cwnd but goodput did not go up, cwnd grows by only 1 segment, since a larger window is not getting more data through.
5. **Extra delay at or above the target** (L222–L230): the further the extra delay is above the target, the more cwnd is cut. Just above the target the cut is a few percent, at twice the target it is a third, and at three times the target or more it is half, the largest cut allowed. The cut is (extra − target) / (extra + target).

After any decrease, the next round makes no change (see 2.3).

**Limits** (L232–L240, L275–L279): cwnd always stays at or above 4 segments. Outside start-up, it also stays at or below twice the path's bandwidth-delay product, i.e. 2 × the highest recent round goodput × the base delay. The highest goodput is kept for up to 10 rounds.

### 2.2 Initial state and parameters

Initial state (`dgcc_init`): cwnd = 4, start-up mode, base RTT and bandwidth unknown, ssthresh unset.

| Parameter (L23–L36) | Value |
|---|---|
| Minimum window | 4 segments |
| Delay target | base RTT / 8, clamped to [2, 20] ms |
| Start-up exit | extra delay ≥ target / 2 |
| Loss cut | × 0.6 if extra > target, × 0.9 otherwise |
| Additive increase | 2–8 segments per round, 1 if the previous increase did not raise goodput |
| Delay-based decrease | (extra – target) / (extra + target), at most 50% |
| Base RTT window | 10 s |
| Bandwidth window | max round goodput, kept for up to 10 rounds |
| Upper bound | 2 × BDP |
| Hold after a decrease | 1 round |

### 2.3 Changes from the pseudocode

The pseudocode left "large", "noticeable", "a few", "a percentage", and the target unspecified; the parameters above fill them in. Other changes:

1. Start-up grows cwnd on every ACK instead of doubling it at the end of a round.
2. After any decrease, the next round makes no decision, so one congestion event does not cause repeated cuts.
3. A loss the kernel later marks spurious is undone (`dgcc_undo_cwnd`).
4. The 2 × BDP cap is not applied during start-up.
5. dgcc sets the pacing rate (L88–L102), because `cong_control` replaces the kernel's pacing update.
6. Timeouts are handled in `set_state` rather than in the per-round logic.

## 3. Experiment

- **Algorithms:** dgcc, CUBIC, Reno, BBR.
- **Destinations:** 5 public iperf3 servers drawn at random from `data/listed_iperf3_servers.csv`: 23.106.226.75:5201, 80.67.167.93:9200, 185.93.2.193:5201, 195.162.68.38:5201, 69.48.237.66:30001.
- **Duration and sampling interval:** 10 s per test, sampled every 0.25 s, for all four algorithms.
- **Repetitions:** 3 per algorithm per destination, i.e. **15 tests per algorithm, 60 tests total**.
- **Logged per sample** (`tcp_sample()`, `results/tcp_stats.csv`): `snd_cwnd`, throughput (Δ `bytes_acked` × 8 / Δt), `srtt` and `min_rtt`, and the loss signal (retransmitted segments per interval).

**Test order.** `run_destination()` runs all repetitions at one destination before moving to the next. Repetition *r* uses the algorithm list rotated by *r* – *1* (`rep_order()`):

| Rep | Order |
|---|---|
| 1 | dgcc, cubic, reno, bbr |
| 2 | cubic, reno, bbr, dgcc |
| 3 | reno, bbr, dgcc, cubic |

# 4. Results

## 4.1 Time series and scatter plots

All plots use the same representative destination, **195.162.68.38:5201**, chosen by `pick_representative()` (median of the per-destination mean goodput). Each figure is one algorithm with one line per repetition, and every axis has the same range in all four algorithms' figures (`analyze()`).

**TCP stats over time (195.162.68.38:5201)**

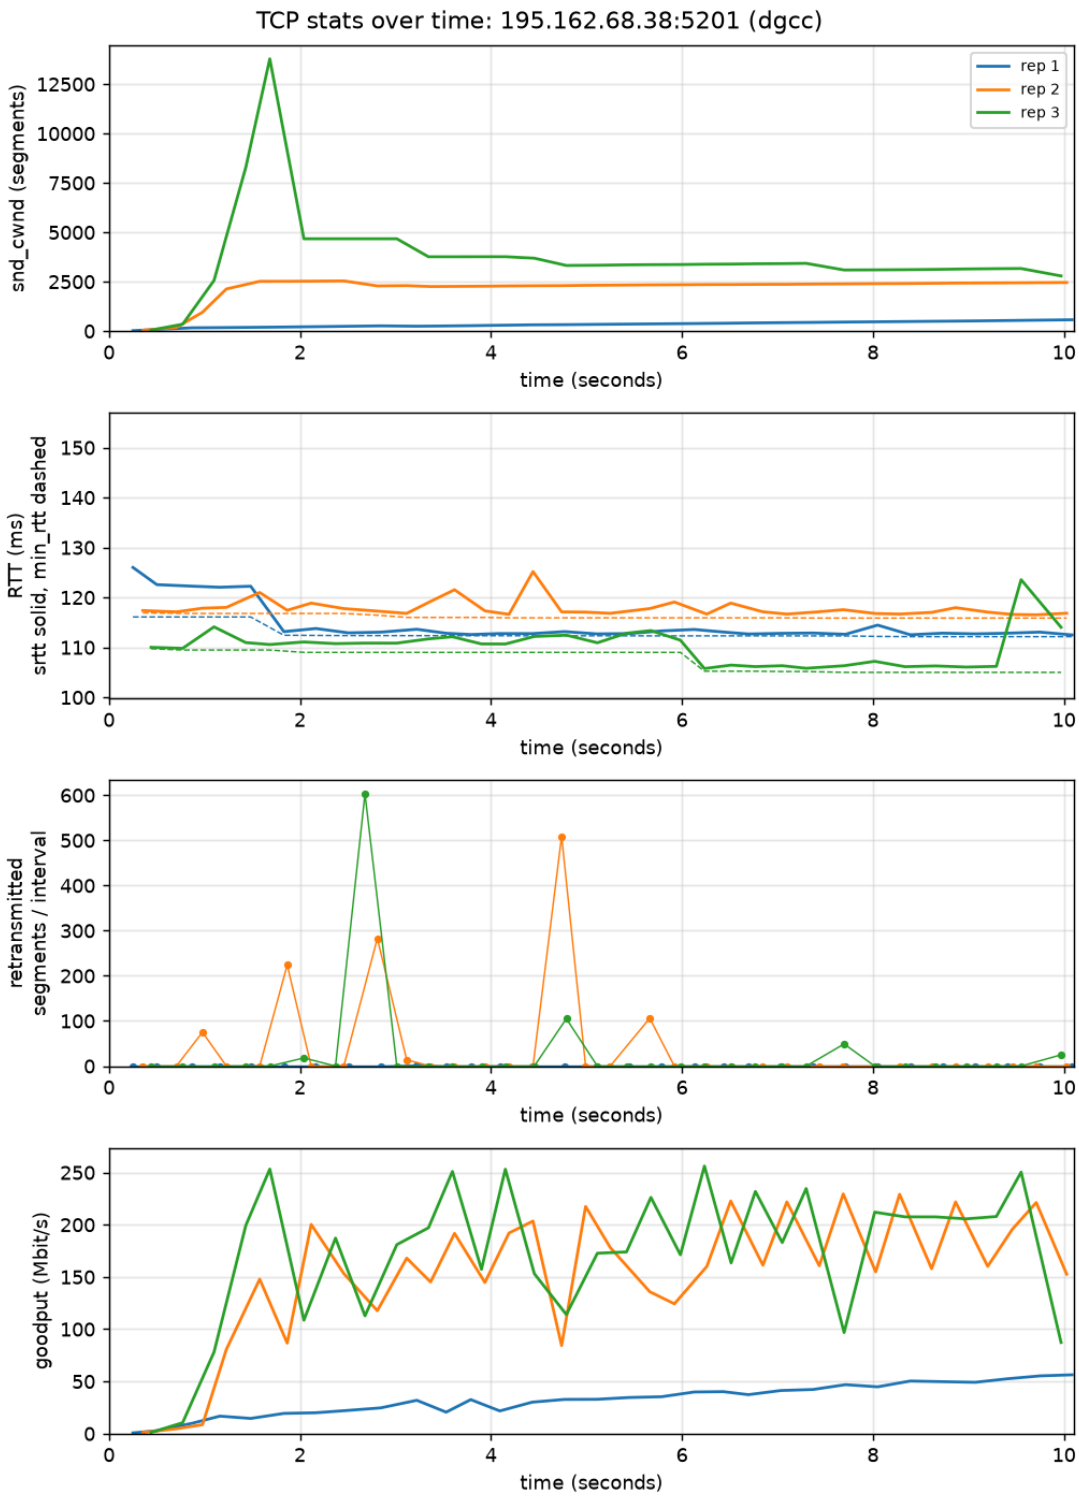



*Figure 1a: dgcc. Generated by* `plot_tcp_stats()`.

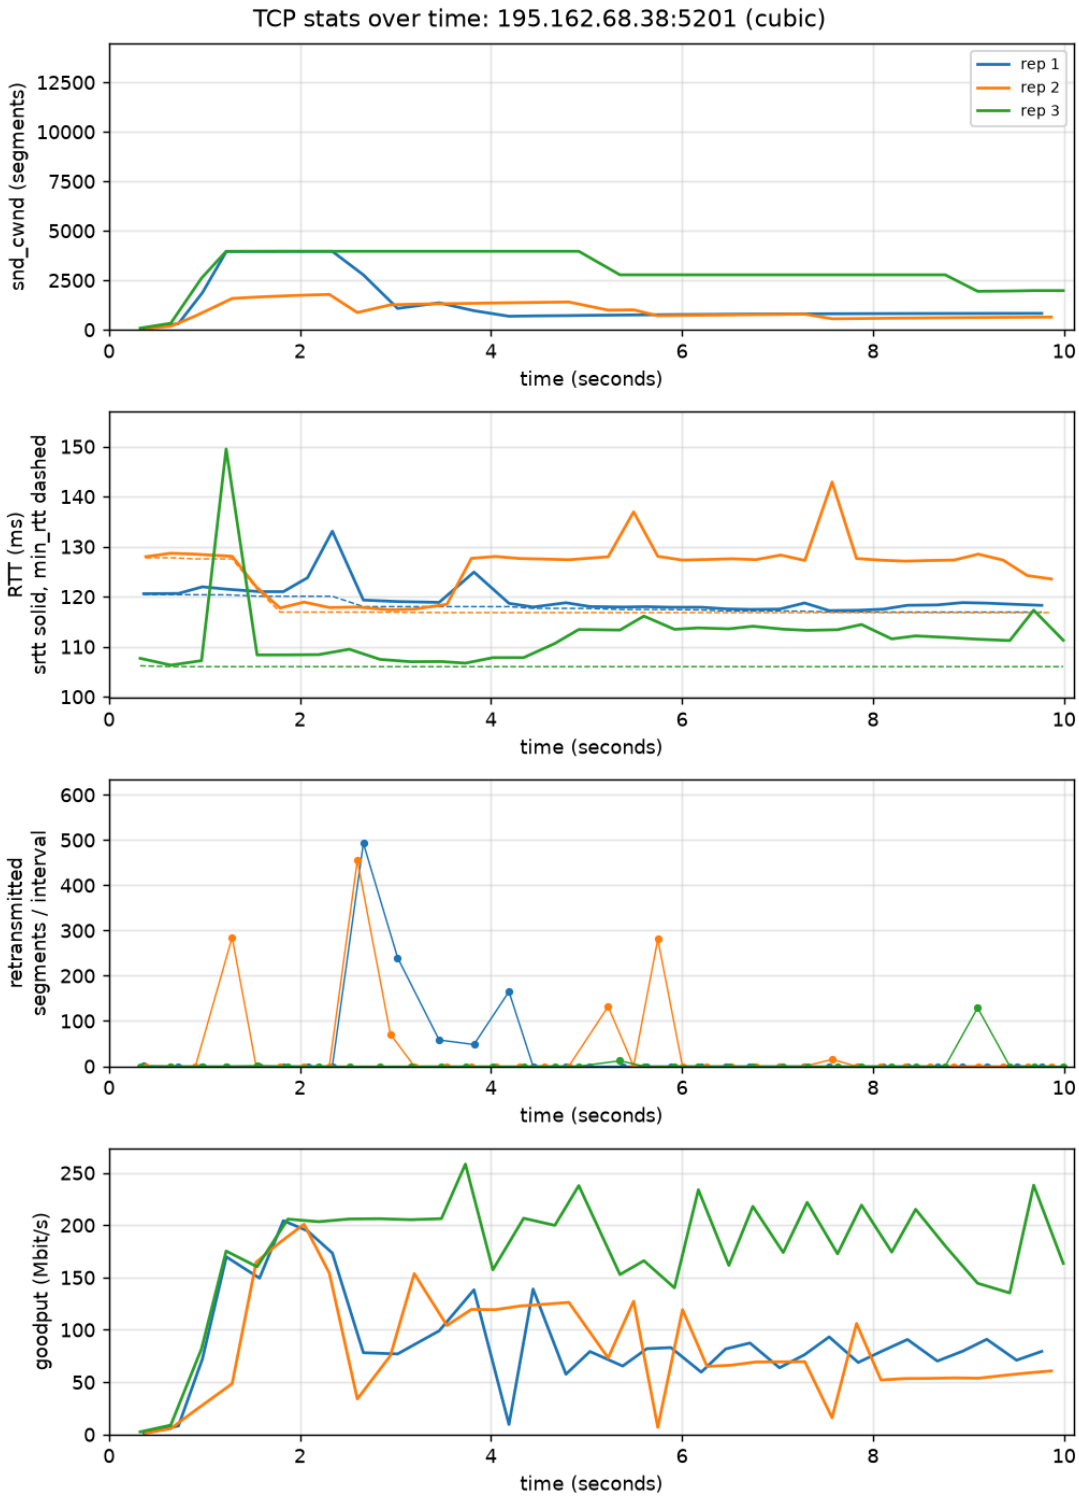



*Figure 1b: CUBIC. Generated by* `plot_tcp_stats()`.

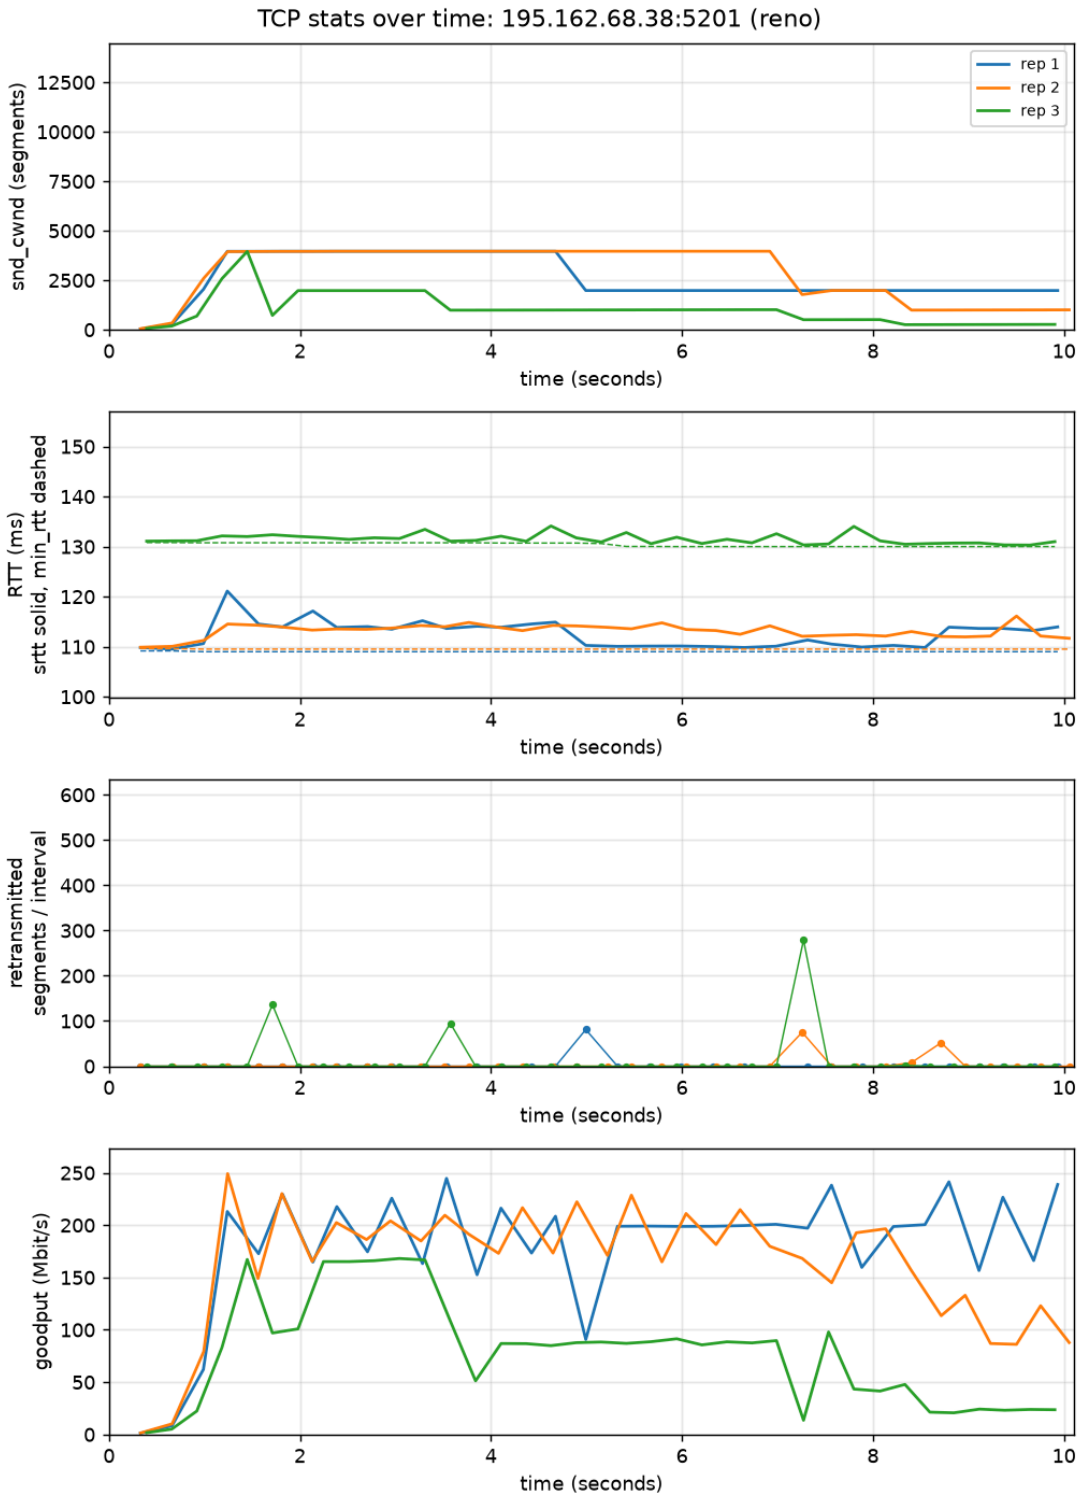



*Figure 1c: Reno. Generated by* `plot_tcp_stats()`.

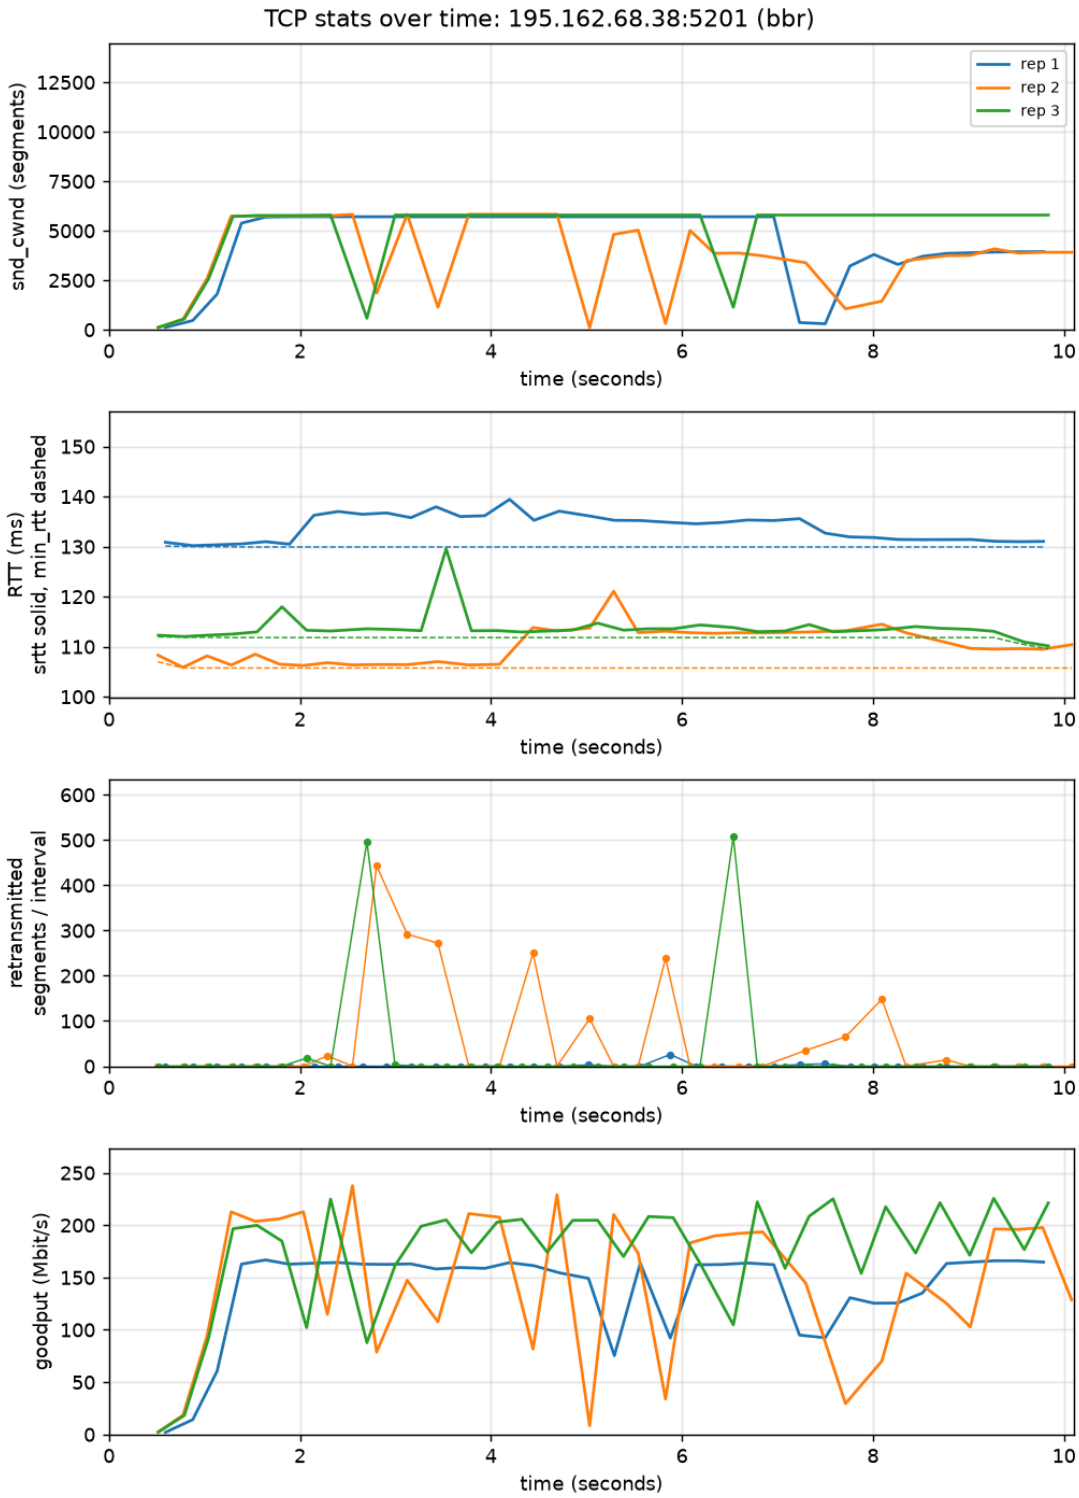



*Figure 1d: BBR. Generated by* `plot_tcp_stats()`.

### TCP stats vs goodput (195.162.68.38:5201)

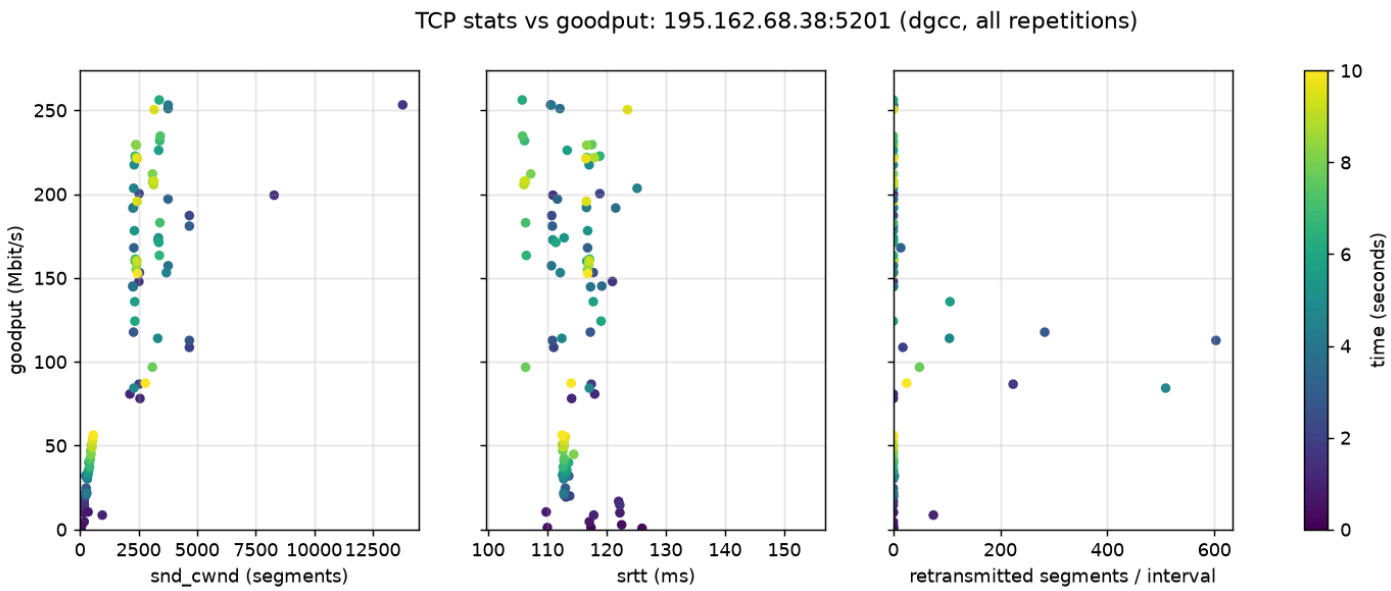



*Figure 2a: dgcc. Generated by* `plot_tcp_stats()`.

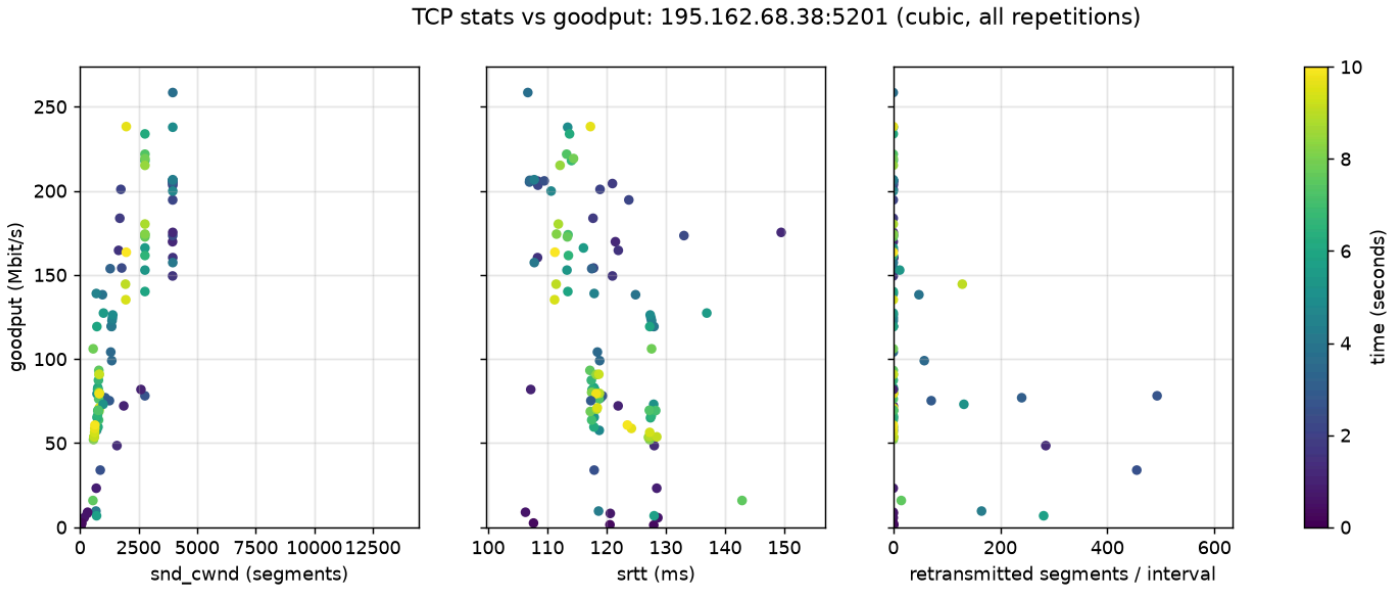



*Figure 2b: CUBIC. Generated by* `plot_tcp_stats()`.

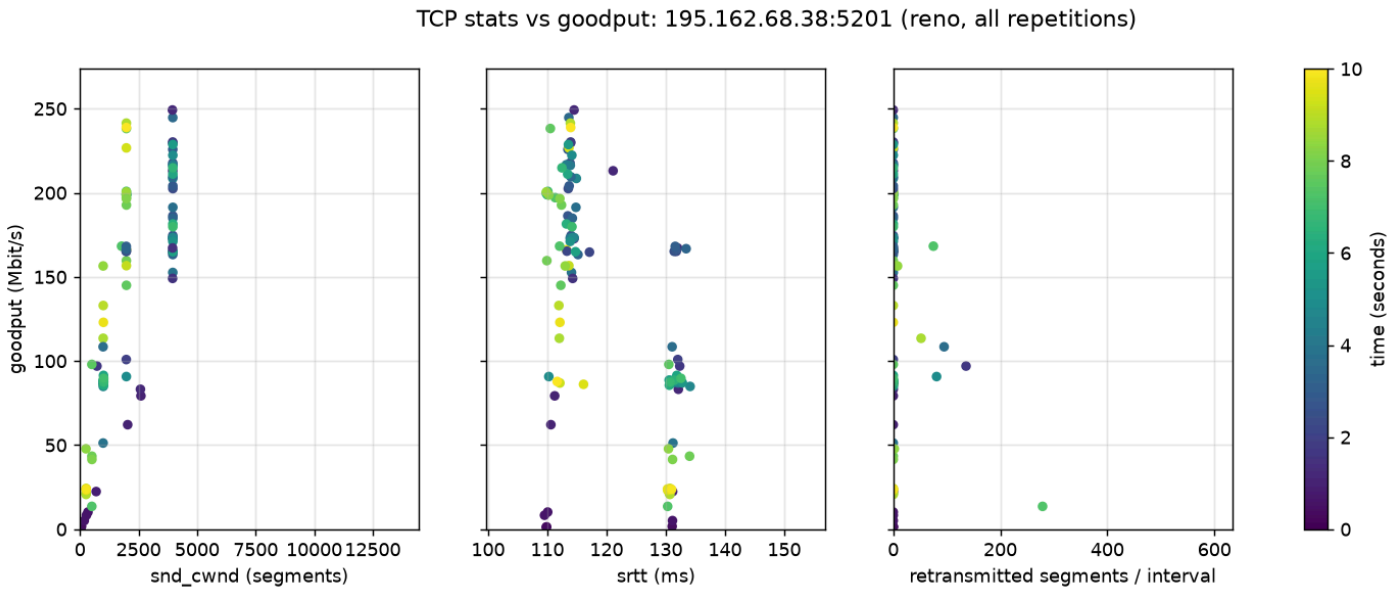



*Figure 2c: Reno. Generated by* `plot_tcp_stats()`.

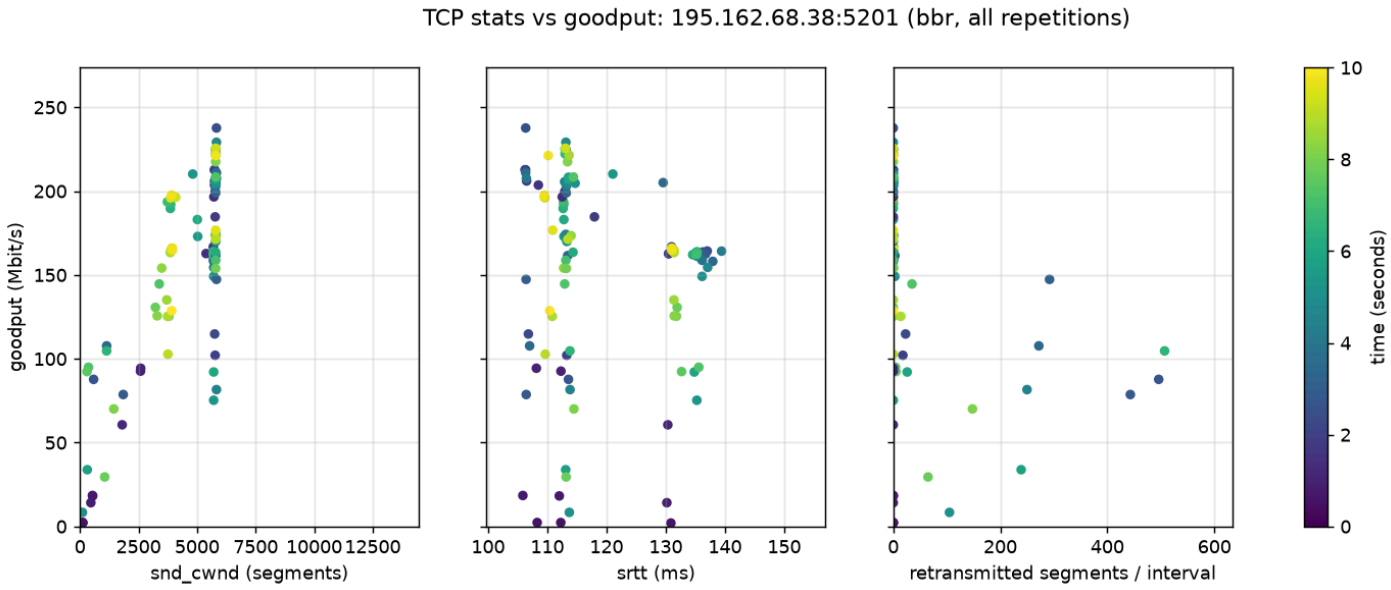



*Figure 2d: BBR. Generated by* `plot_tcp_stats()`.

### 4.2 Aggregate statistics

Over all samples from 5 destinations × 3 repetitions (`results/aggregate.csv`, computed by `summarize()`).

| | dgcc | CUBIC | Reno | BBR |
|---|---|---|---|---|
| goodput mean (Mbit/s) | 129.4 | 141.0 | 117.1 | 151.4 |
| goodput median (Mbit/s) | 153.2 | 155.8 | 119.8 | 158.9 |
| goodput p95 (Mbit/s) | 237.5 | 228.4 | 225.8 | 237.0 |
| srtt mean (ms) | 119.2 | 120.3 | 118.9 | 124.1 |
| srtt median (ms) | 113.9 | 118.7 | 114.2 | 113.3 |
| srtt p95 (ms) | 144.9 | 143.3 | 144.2 | 149.6 |

### 4.3 Discussion

**TODO:** explain the observed differences in throughput and RTT, using the tables above and Figures 1–2.

## AI use

Claude Code (Claude Opus) was used to:

- write the eBPF implementation from our pseudocode;
- extend the HW2 client for four algorithms, repetitions, and aggregate statistics;
- run the experiments;
- draft this report.

We reviewed the code and checked the analysis against the raw data.