NOTES

1. THIS DRAWING IS FOR INDICATIVE PURPOSE ONLY. THE EL SUB-CONTRACTOR SHALL SUPPLY AND INSTALL THE ELECTRICAL INSTALLATION TO SUIT THE USE OF THE DEVELOPMENT.
2. ALL PROTECTION CURRENT TRANSFORMERS SHALL BE OF AT LEAST CLASS 5P10 ACCURACY TO MEET CLP'S REQUIREMENT.
3. FOR METERING ARRANGEMENT, TELEPHONE LINES TOGETHER WITH TELEPHONE SOCKET OUTLETS TO BE TERMINATED AT POSITION IMMEDIATELY ADJACENT TO THE C.T. OPERATED METER IN METERING CUBICLE. THE TELEPHONE LINE SHOULD BE SUITABLY PROTECTED BY CONDUIT/TRUNKING SOLELY FOR METERING PURPOSES AND CONNECTED TO THE BUILDING MAIN TELEPHONE EXCHANGE ROOM. BESIDES, ADEQUATE SPACE SHOULD BE RESERVED IN SWITCHROOM FOR CLP METERING EQUIPMENT. THE INSTALLATION SHALL REFER TO CLP's STANDARD DRAWINGS.
4. ALL CABLE CHANGING BOX THAT ARE NECESSARY IN THE INSTALLATION WORKS BUT NOT SHOWN IN THIS SET OF DRAWINGS SHALL BE INCLUDED IN THIS CONTRACTOR WITH NO ADDITIONAL COST.
5. ALL MCCB UNITS INSIDE MAIN SWITCHBOARD SHALL BE OF AT LEAST 40kA BREAKING CAPACITY.
6. ALL FIRE RESISTANT CABLE (F.R.) SHALL BE OF F.S.D. APPROVAL TYPE AND COMPLY TO BS6387 CAT. CWZ OR BS 6207/BSEN 60702 UNLESS OTHERWISE SPECIFIED.
7. ALL PHYSICAL REQUIREMENT, SPACING & POWER REQUIREMENT OF CLP's METER SHALL BE IN ACCORDANCE WITH THE LATEST CLP GUIDELINES.
8. TRADITIONAL TYPE OVERLOAD AND EARTH FAULT PROTECTION RELAY SHALL BE EMPLOYED FOR THE OVERLOAD AND EARTH FAULT PROTECTION OF 3200A 4P MAIN INCOMER AT LV SWITCHBOARD.
9. THE SIGNAL CABLE (COMPLY WITH BS6387 CAT. CWZ) CURRENTLY FROM UNDERVOLTAGE RELAY TO GENSET SHALL BE SUPPLIED & INSTALLED BY THIS SUB-CONTRACTOR.
10. THE EL SUB-CONTRACTOR IS RESPONSIBLE TO LIAISON WITH POWER SUPPLY COMPANY TO OBTAIN ALL LANDLORD AND TENANTS METERS INCLUDING THE SUBMISSION OF ALL FORMS AND APPLICATION AND PAYMENT OF ALL FEES AND CHARGES. PLYWOOD BOARDS SHALL BE PROVIDED FOR METER INSTALLATION TO SUIT UTILITY COMPANY REQUIREMENTS.
11. THE CONTRACTOR SHALL MEASURE THE THD AFTER OCCUPATION AND PROVIDED THE APPROPRIATE CAPACITY OF AHF TO MEET THE REQUIREMENT OF THE COP of ENERGY EFFICIENCY OF BUILDING SERVICES INSTALLATIONS IN BUILDING. THE RATING OF THE ASSOCIATED MCCB SHALL BE TO SUIT THE AHF RATING.

CABLE MARK :

① 1 x 4/C 16 mm² FR XLPE/SWA/PVC CABLE
② 1 x 4/C 25 mm² FR XLPE/SWA/PVC CABLE
③ 1 x 4/C 35 mm² FR XLPE/SWA/PVC CABLE
④ 1 x 4/C 50 mm² FR XLPE/SWA/PVC CABLE
⑤ 1 x 4/C 70 mm² FR XLPE/SWA/PVC CABLE
⑥ 1 x 4/C 95 mm² FR XLPE/SWA/PVC CABLE
⑦ 1 x 4/C 120 mm² FR XLPE/SWA/PVC CABLE

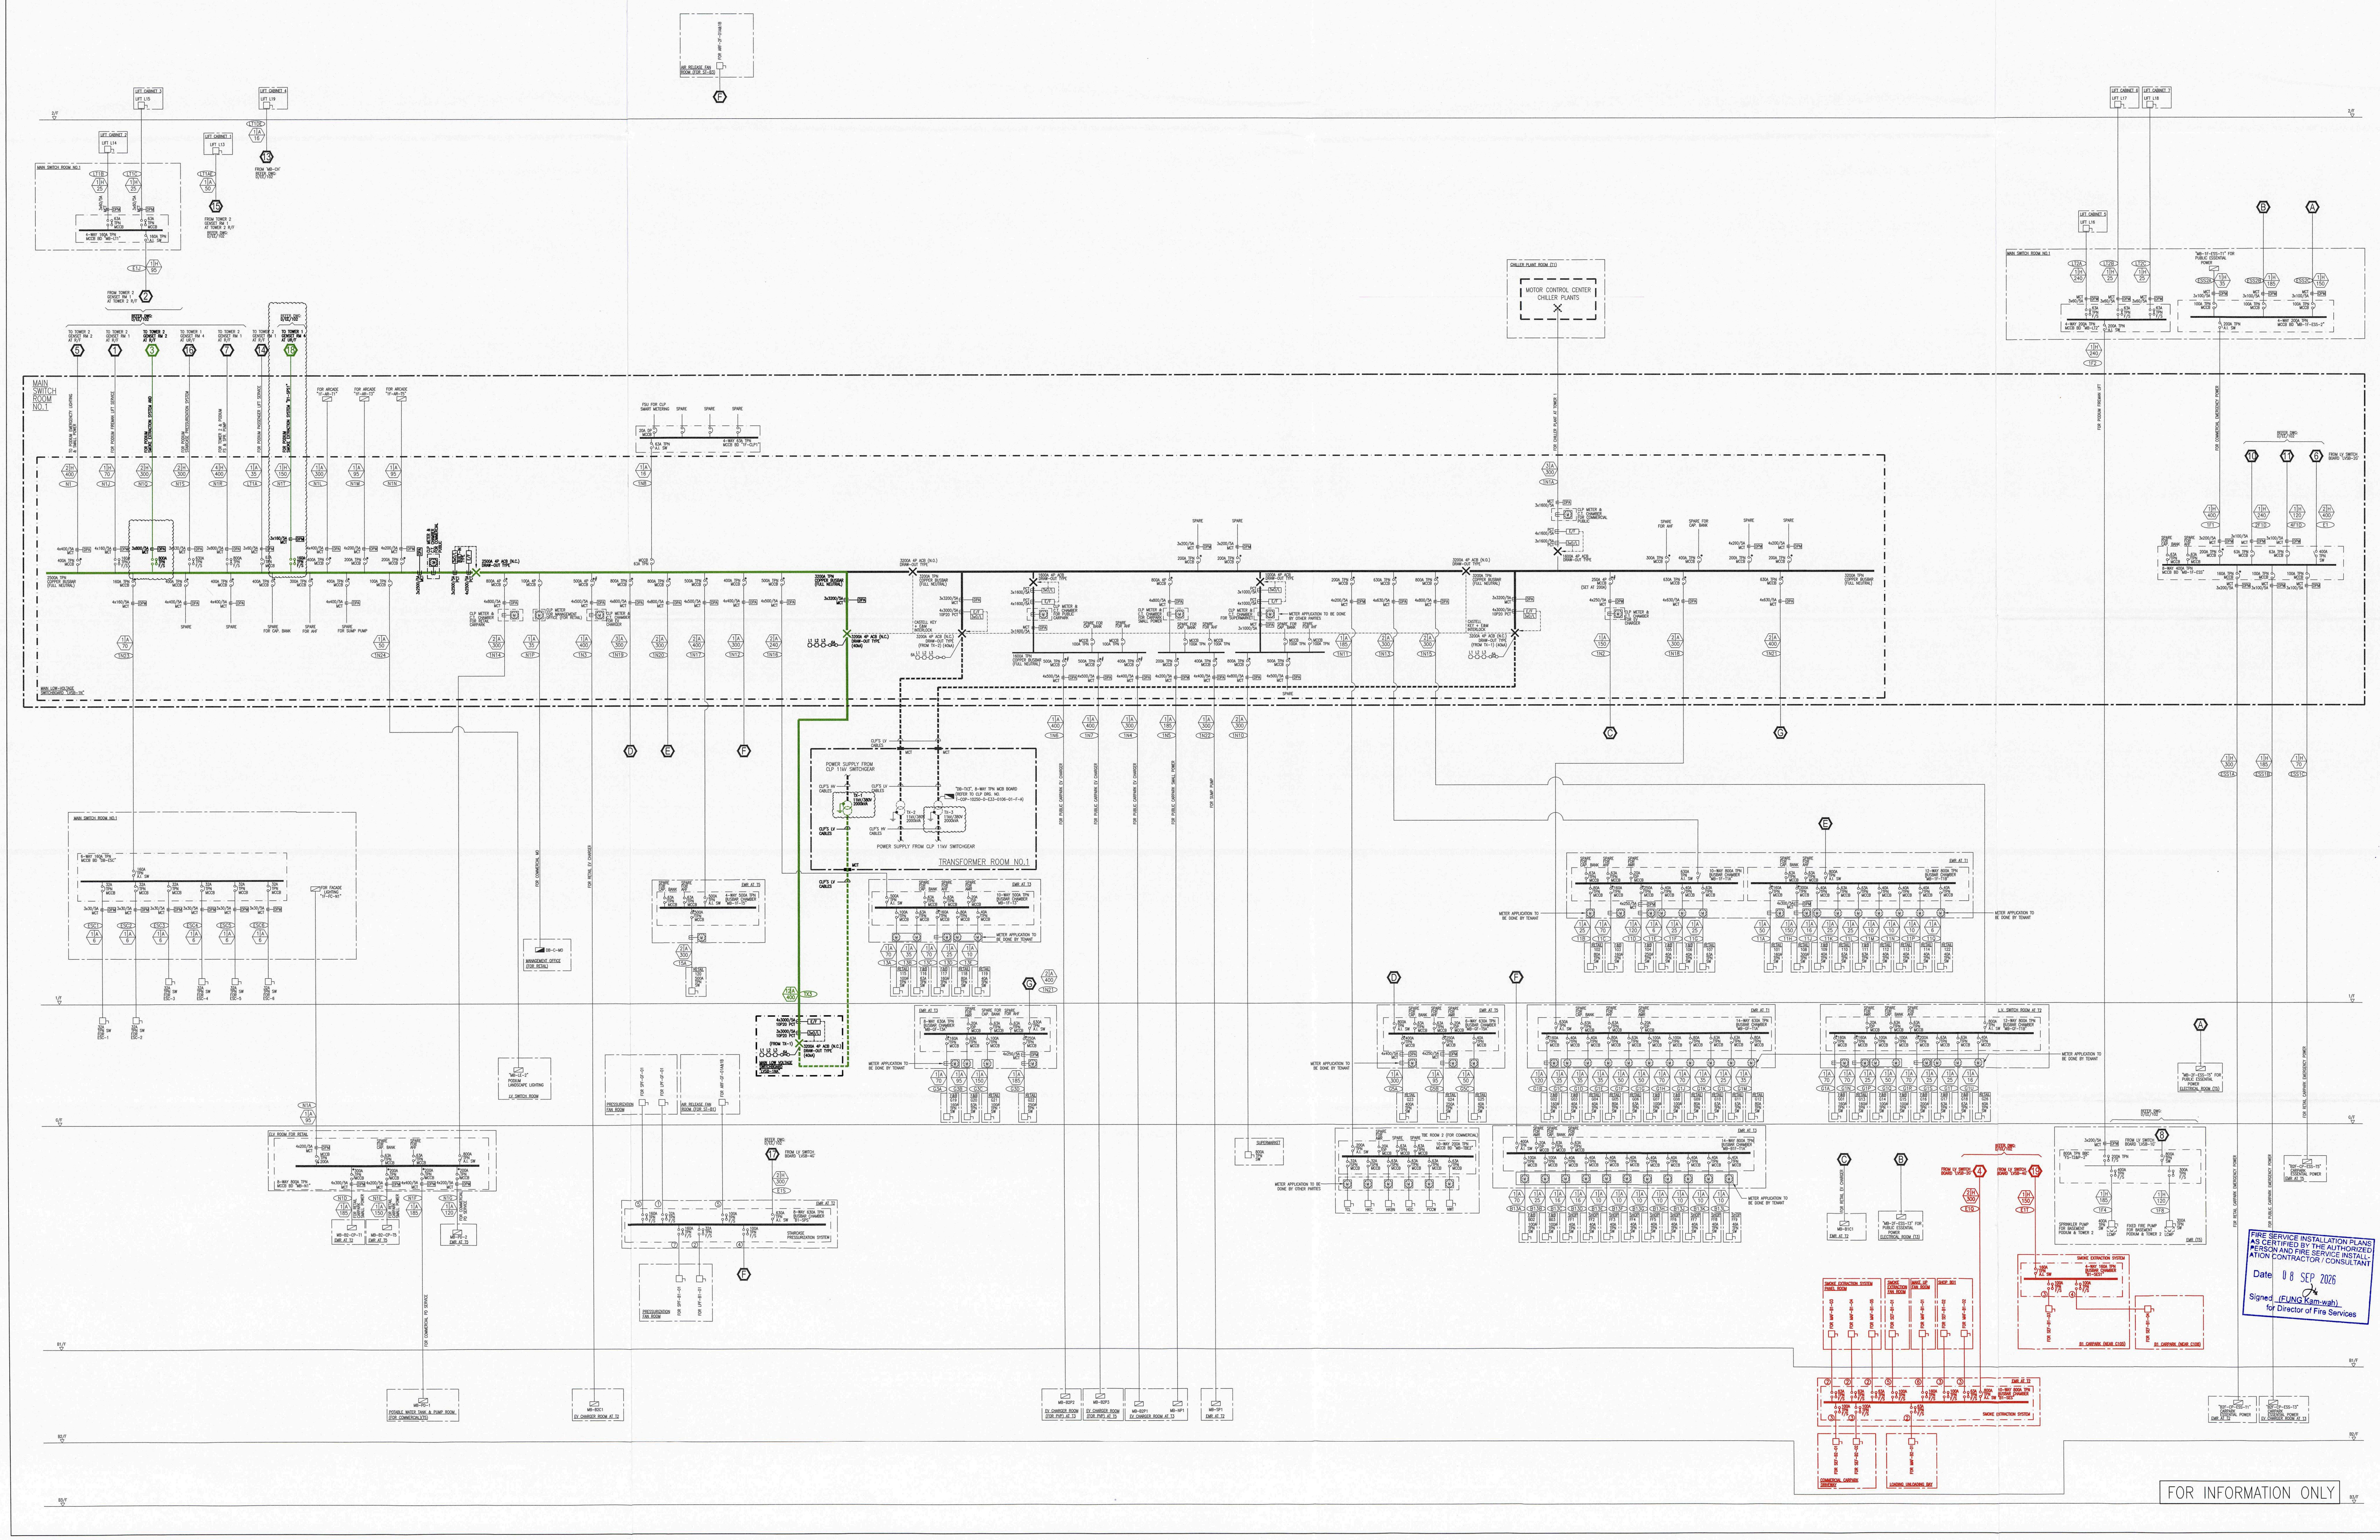
MAIN SWITCH ROOM NO.1
TRANSFORMER ROOM NO.1
POWER SUPPLY FROM CLP 11kV SWITCHGEAR
MOTOR CONTROL CENTER CHILLER PLANTS
G/F
B1/F
B2/F
B3/F
"B2F-CP-ESS-T5" CARPARK ESSENTIAL POWER EMR AT T5
"B2F-CP-ESS-T1" CARPARK ESSENTIAL POWER EMR AT T2
"B2F-CP-ESS-T3" CARPARK ESSENTIAL POWER EV CHARGER ROOM AT T3
FOR RETAIL CARPARK EMERGENCY POWER
FOR PUBLIC CARPARK EMERGENCY POWER

FOR INFORMATION ONLY

LEGEND

	CLP 11kV/380V TRANSFORMER BY CLP
M	CLP METER BY CLP AND METER BOARD AS PER CLP REQUIREMENT BY THIS CONTRACTOR
GF2	DIESEL GENERATOR SET, 380/220V 3-PHASE, 50Hz, 500kVA PRIME (CONTINUOUS) RATING
	ISOLATION SWITCH (TYPE AND RATING AS SPECIFIED)
	FUSE SWITCH
	FUSE LINK, ONE PER EACH PHASE
	CIRCUIT BREAKER (TYPE AND RATING AS SPECIFIED)
*	CIRCUIT BREAKER WITH ELECTRONIC EARTH FAULT RELAY (TYPE AND RATING AS SPECIFIED)
#	"#" DENOTES THE POWER SUPPLY OF EV CHARGING FACILITIES SHALL BE CUT OFF BY THE FIREMAN'S EMERGENCY SWITCH.
✕	AIR CIRCUIT BREAKER (ACB), DRAW-OUT TYPE
	CURRENT TRANSFORMER
DPA	DIGITAL POWER ANALYZER (DPA) WITH NETWORK ANALYZING FUNCTION COMPLY WITH BS EN 60521:1995 CLASS 1, MEASUREMENT SHOULD BE TRENDED EVERY 15 MINUTES ABD INCLUDE HOURLY, DAILY, MONTHLY AND ANNUAL DATA. METERING DEVICE AND ASSOCIATED FACILTIES SHOULD BE CAPABLE OF MAINTAINING ALL DATA COLLECTED FOR A MINIMUM OF 36 MONTHS BY THIS SUB-CONTRACTOR DPA SHOULD BE FOR MEASURING VOLTAGES (ALL PHASE-TO-PHASE AND PHASE-TO-NEUTRAL), CURRENTS (THREE PHASES AND NEUTRAL), TOTAL POWER FACTOR, TOTAL ENERGY CONSUMPTION (kWH), MAXIMUM DEMAND (kVA) AND TOTAL HARMONIC DISTORTION.
DPM	DIGITAL MULTI-FUNCTION POWER METER (DPM) COMPLY WITH BS EN 60521:1995 CLASS 1, MEASUREMENT SHOULD BE TRENDED EVERY 15 MINUTES ABD INCLUDE HOURLY, DAILY, MONTHLY AND HOURLY, DAILY, MONTHLY AND ANNUAL DATA. METERING DEVICE ANNUAL DATA. METERING DEVICE AND ASSOCIATED FACILTIES SHOULD BE CAPABLE OF MAINTAINING ALL DATA COLLECTED FOR A MINIMUM OF 36 MONTHS BY THIS SUB-CONTRACTOR DPM SHOULD BE FOR MEASURING CURRENT (THREE PHASES AND NEUTRAL) AND TOTAL ENERGY CONSUMPTION (kWH).
3xO/L	I.D.M.T.L. OVERLOAD CURRENT PROTECTION RELAY
E/F	I.D.M.T.L. EARTH FAULT PROTECTION RELAY
U/V	UNDER-VOLTAGE RELAY (THREE-PHASE)
PFC	POWER FACTOR CONTROLLER
○	INDICATING LAMP
	CAPACITOR BANK
⏚	SYSTEM EARTH
	CABLE TEE-OFF BOX
	MCCB BOARD
	MCB BOARD
☒	LOCAL MOTOR CONTROL PANEL (LMCP)
XX	CABLE CODE (XX DENOTES CABLE NUMBER)

LEGEND FOR CABLE SIZE SHALL REFER TO THE FOLLOWING:

4 A 400
QUANTITY OF CABLE / BUSDUCT
TYPES OF CABLE / BUSDUCT :
CONDUCTOR CROSS SECTIONAL AREA (mm²) FOR CABLE OR AMPERE RATING (A) FOR BUSDUCT

A – 4/C XLPE/SWA/PVC Cu. CABLE + CPC ON CABLE TRAY
B – 1/C XLPE/PVC Cu. CABLE + CPC IN CONDUIT / TRUNKING
C – 1/C PVC LSOH Cu. CABLE + CPC IN CONDUIT / TRUNKING
D – 4/C XLPE/PVC Cu. CABLE + CPC ON CABLE TRAY
E – 1/C PVC CU. CABLE + CPC IN CONDUIT / TRUNKING
H – 4/C FR/SWA Cu. CABLE TO BS6387 CAT. CWZ + CPC ON CABLE TRAY
M – 1/C XLPE/PVC PRE-FABRICATED BRANCHMATIC Cu. CABLE ON CABLE TRAY
P – 1/C FR CABLE Cu. CABLE TO BS6387 CAT. CWZ + CPC IN CONDUIT / TRUNKING

LOO Kwan Wai
(RPE No.: RP0260258)

NO.	DATE	REVISIONS	DRAFTED	CHECKED	DESIGNED	REVIEWED
B	06/2026	FSD THIRD SUBMISSION	HYH	WWC	HYH	TKL
A	09/2025	FSD SECOND SUBMISSION	HYH	WWC	HYH	TKL
0	05/2025	FSD FIRST SUBMISSION	HYH	WWC	HYH	TKL

CLIENT:

NATION STAR DEVELOPMENT LIMITED
75/F, 8 Finance Street,
Central, Hong Kong

PROJECT ARCHITECT & AUTHORIZED PERSON:

RONALD LU & PARTNERS
呂元祥建築師事務所
33rd Floor, Wu Chung house, 213 Queen's Road East,
Wanchai, Hong Kong

STRUCTURAL/GEOTECHNICAL

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

BUILDING SERVICES ENGINEER:

wsp
7/F, One Kowloon
1 Wang Yuen Street
Kowloon Bay, Hong Kong

QUANTITY SURVEYOR:

ARCADIS
17/F, Two Harbour Square, 180 Wai Yip Street,
Kwun Tong, Kowloon
Hong Kong

FIRE SERVICES CONTRACTOR:

開創工程有限公司
GRAND CREATIVE ENGINEERS LIMITED

FIRE SERVICE INSTALLATION PLANS AS CERTIFIED BY THE AUTHORIZED PERSON AND FIRE SERVICE INSTALLATION CONTRACTOR / CONSULTANT
Date 08 SEP 2026
Signed (FUNG Kam-wah)
for Director of Fire Services

PROJECT:

PROPOSED DEVELOPMENT AT BAILEY
STREET & WING KWONG STREET,
TO KWA WAN, KOWLOON
INLAND LOT NO. 11279
(URA PROJECT KC-009)

TITLE:

SMOKE EXTRACTION SYSTEM –
ELECTRICAL & LMCP WIRING DIAGRAM
(1 OF 2)

21

DATE: 06/2026		SCALE: NTS@A0	
DRAFTED: HYH	CHECKED: WWC	DESIGNED: HYH	REVIEWED: TKL
JOB NO. 2503373A	DRAWING NO. D/EE/101		REV. NO. B