DUAL-ALARM AM/FM CLOCK RADIO



Team W.O.R.K

Matthew Kay, Omer Omer, Ricky Ramos, Colton Williams

TABLE OF CONTENTS

The Vision
Use Cases:
Use Case UC1: Setting the Alarm
Use Case UC2: Switch Between AM/FM Stations
Use Case UC3: Setting the Time
Use Case UC4: Snoozing the Alarm
Use Case UC5: Adjust the Volume
Use Case UC6: Tune the Radio
Use Case UC7: Turn the Radio ON/OFF
Supplementary Specification
Domain Model
Sequence Diagrams w/ Operation Contracts
Glossary

Vision:

The goal of this project is to create the software that controls a Dual Alarm AM/FM Clock Radio. The software must support the use of two alarms that can be set to a desired time. The clock radio must also be able to switch between AM and FM and connect to specific radio stations as selected by the user.

Use Case UC1: Setting the Alarm

Primary Actor	Clock Owner
Goal in Context	Setting the alarm so it goes off at desired time
Scope	Dual Alarm Clock Radio Software
Level	User Goal
Stakeholders and Interests	Clock owner: wants an alarm to go off at the specified time
Precondition	Clock is on and is able to accept hours, minutes, seconds, and AM/PM settings for the alarms. Also, the software needs to distinguish between setting the alarm and setting the current time. The software need to know if the alarm is on or off. The software needs to make sure it goes off and makes a noise at the desired time.
Success Guarantees	The clock takes in the desired hours, minutes, and AM/PM settings and saves them in memory for alarm 1 or 2. The alarm will sound at the correct time as long as the user has not cancelled the alarm.
Main Success Scenario	The clock owner enters the alarm time into the alarm, and the software saves the time into memory. The software saves the desired time of 8:40 AM to alarm 1. The alarm goes off at 8:40 AM, and the clock owner wakes up at the correct time and is not late for work.
Extensions	The clock owner wants to cancel an alarm that is currently in the process of being set. The user will repeatedly press either the Alarm 1 or Alarm 2 button, and the software will recognize the cancellation of the alarm setting.
Special Requirements	The software must recognize HH:MM AM/PM format for displaying the time
Open Issues	Does the software support military time?

Use Case UC2: Switch Between AM/FM Radio

Primary Actor	Clock Owner
Goal in Context	User is able to switch between AM or FM radio stations
Scope	Dual Alarm Clock Radio Software
Level	User Goal
Stakeholders and Interests	Clock Owner: Wants the ability to listen to various stations on either AM or FM radio Guests: Want the ability to change the radio AM/FM setting
Precondition	Clock is on and the software is able to recognize whether it is set to AM or FM.
Success Guarantees	User is able to change the radio either AM or FM radio. The user is able to switch back and forth between AM or FM radio at any given time.
Main Success Scenario	The user turns on the radio. The radio is currently set to AM and is on a station that is only broadcasting a static sound. The user switches the radio to FM radio.
Extensions	The user turns on the radio, and it is currently set to AM radio. The user attempts to switch to FM radio, but fails to do so.
Special Requirements	The software must be able to recognize and receive input from antenna.
Open Issues	Does the software support foreign radio stations?

Use Case UC3: Setting the Time

Primary Actor	Clock Owner	
Goal in Context	Setting the time on LCD screen	
Scope	Dual Alarm Clock Radio Software	
Level	User Goal	
Stakeholders and Interests	Clock Owner: wants to set the clock to the proper time	
Precondition	Clock is connected to the power source and has functioning buttons. Software must recognize HH:MM AM/PM format.	
Success Guarantees	The clock takes in the desired hours, minutes, and AM/PM settings and saves them in memory.	
Main Success Scenario	The clock owner connects the clock to a power source, and it turns on. The display time is flashing at 12:00 AM. The user looks at the time on a phone and adjusts the clock to the appropriate time by operating the respective buttons.	
Extensions	Scenario 1: The clock owner attempts to change the time after moving to a city with a different time zone. The owner presses the "Time" button in order for the software to prompt for input in HH:MM AM/PM format. The user adjusts the clock to a specified time and presses the "Time" button once more. The correct time is now displayed.	
Special Requirements	The software must recognize HH:MM AM/PM format for displaying the time.	
Open Issues	Will the software automatically adjust for Daylight Saving Time?	

Use Case UC4: Snoozing the Alarm

Primary Actor	Clock Owner	
Goal in Context	Snoozing the alarm for 9 minutes	
Scope	Dual Alarm Clock Radio Software	
Level	User Goal	
Stakeholders and Interests	Clock Owner: wants to set to snooze the alarm for 9 minutes before going off again	
Precondition	Clock is connected to the power source and at least one of the alarms has been set	
Success Guarantees	The alarm will stop sounding and then go off again after 9 minutes if the snooze button is pressed	
Main Success Scenario	The clock owner connects the clock to a power source and sets an alarm for the morning. The alarm goes off at the correct time, and the user presses the snooze button. The alarm successfully goes off again after 9 minutes.	
Extensions	Scenario 1: The clock owner connects the clock to a power source and sets an alarm for the morning. The snooze button is pressed and the alarm stops sounding, but the alarm fails to go off again 9 minutes later. Scenario 2: The clock owner connects the clock to a power source and sets an alarm for the morning. The snooze button is pressed, but the alarm fails to stop sounding.	
Special Requirements		
Open Issues	How many times can snooze button be pressed?	

Use Case UC5: Adjust the Volume

Primary Actor	Clock Owner
Goal in Context	Control the volume of the radio
Scope	Dual Alarm Clock Radio Software
Level	User Goal
Stakeholders and Interests	Clock Owner: wants to adjust the radio to a comfortable volume Guests: want to adjust the radio to a comfortable volume
Precondition	Clock is connected to the power source and software supports volume control
Success Guarantees	The volume of the radio will increase or decrease as adjusted by the user
Main Success Scenario	The clock owner connects the clock to a power source and turns on the radio. The radio is initially too loud, so the user operates the volume knob to get to a comfortable volume
Extensions	Scenario 1: The clock owner connects the clock to a power source and turns on the radio. The volume is too high, so the user attempts to adjust the volume knob. The radio remains at the same volume.
Special Requirements	
Open Issues	

Use Case UC6: Tune the Radio

Primary Actor	Clock Owner	
Goal in Context	User is able to tune the radio on either AM or FM radio stations	
Scope	Dual Alarm Clock Radio Software	
Level	User Goal	
Stakeholders and Interests	Clock Owner: Wants the ability to listen to various stations on either AM or FM radio Radio Stations: Want to know how many people listen to their station Guests: Want the ability to tune the radio	
Precondition	Clock is on and the software is able to recognize whether it is set to AM or FM and change the station	
Success Guarantees	User is able to tune the radio to any station on AM/FM	
Main Success Scenario	The user turns on the radio. The radio is currently set to AM and is on a station that is only broadcasting a static sound. The user switches the radio to FM radio and tunes to a station playing music.	
Extensions	The user turns on the radio, and it is currently set to AM radio. The user attempts to switch to FM radio. The user begins to tune the radio, but it remains on the same station	
Special Requirements	The software must be able to recognize and receive input from antenna. The software must be able to recognize when the tuning knob is being adjusted	
Open Issues	Does the software support foreign radio stations?	

Use Case UC7: Turn the Radio ON/OFF

Primary Actor	Clock Owner
Goal in Context	User is able to switch between AM or FM radio stations
Scope	Dual Alarm Clock Radio Software
Level	User Goal
Stakeholders and Interests	Clock Owner: Wants the ability to listen to various stations on either AM or FM radio Guests: Want the ability to change the radio AM/FM setting
Precondition	Clock is on and the software is able to recognize whether it is set to AM or FM.
Success Guarantees	User is able to change the radio either AM or FM radio. The user is able to switch back and forth between AM or FM radio at any given time.
Main Success Scenario	The user turns on the radio. The radio is currently set to AM and is only outputting static sound. The user switches the radio to FM radio.
Extensions	The user turns on the radio, and it is currently set to AM radio. The user attempts to switch to FM radio, but fails to do so.

Supplementary Specification

- Functionality:
 - User will have the ability to:
 - Set the alarm
 - Switch between AM/FM radio
 - Set the time
 - Snooze the alarm
 - Adjust the volume
 - Tune the radio
 - Turn the Radio On/Off
- Usability:
 - Human Factors:
 - The user should have the basic ability to read the buttons.

The user will be able to see the the time and on a large LCD screen. Therefore:


- The time should be easily read from more than a few meters away.
- The color of the numerical digits will be in red with a black background for good contrast to aid those with poor eyesight.
- Reliability:
 - Failure rate of alarm to go off should be very low.
- Performance:
 - The radio should be able to tune to the desired station and start outputting music within a couple seconds.
 - The clock should respond immediately to the snoozing/disabling of the alarm.
- Supportability:
 - Software will not need to be updated
 - Configurability:
 - Different users may control which preset stations to use.
 - The alarms may be set to any time the user desires.

Interfaces:

Noteworthy Hardware and Interfaces:


- LCD Screen
- Buttons:
 - Main On/Off
 - Alarm 1 On/Off
 - Alarm 2 On/Off
 - Radio Tuning Knob
 - Volume Knob
 - Adjust Hours
 - Adjust Minutes
 - Adjust AM/PM

Domain Model

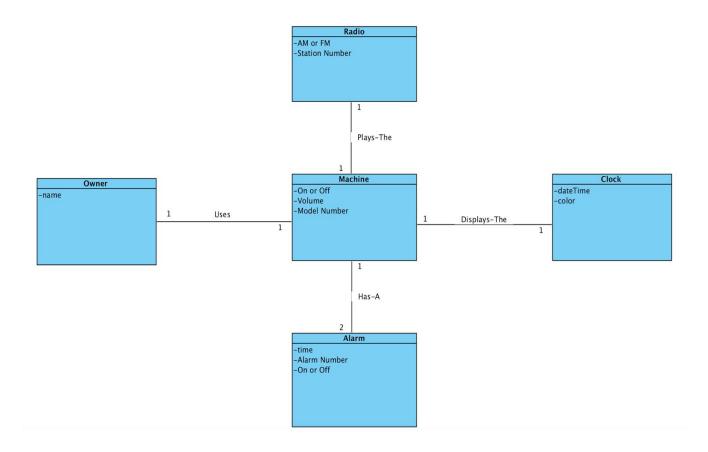

System Sequence Diagrams and Operation Contracts


Enable Alarm:

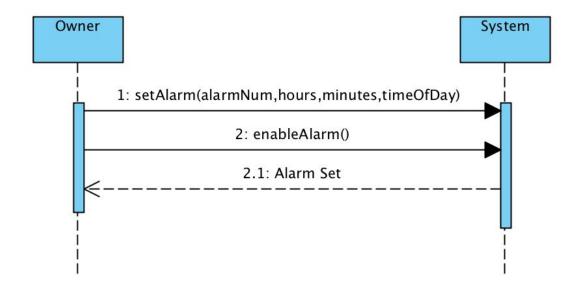

Contract CO1: enableAlarm

Operation	enableAlarm()
Cross References	Use Cases: Set Alarm
Preconditions	Machine must be on, and the hours, minutes, and time of day have been inputted.
Postconditions	The machine was on and an alarm time was previously selected. The alarm went off at the correct time.


Switch Between AM/FM Radio:

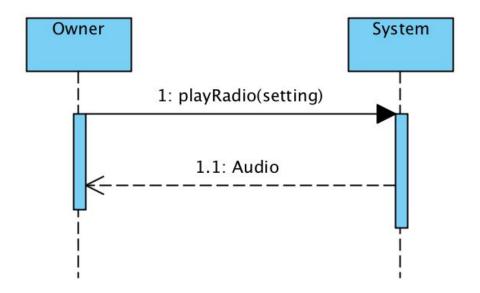

Contract CO2: playRadio

Operation	playRadio(setting)
Cross References	Use Cases: Switch Between AM/FM Radio
Preconditions	Machine is on, and the user has decided which setting the radio will be on
Postconditions	The machine was turned on and started playing music on AM radio. The radio was then set to FM radio.


Snooze Alarm:

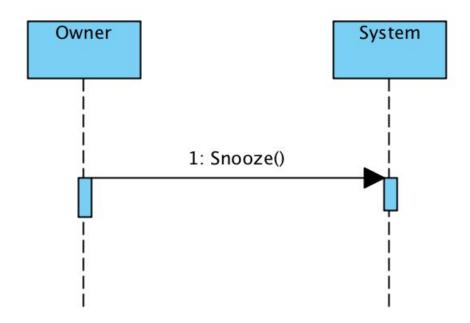

Contract CO3: snooze

Operation	snooze()
Cross References	Use Cases: Snooze Alarm
Preconditions	Machine is on, and the user has already set an appropriate alarm time
Postconditions	Machine was on, and an alarm was previously set. The alarm went off at the correct time but was snoozed.


Set the Volume:

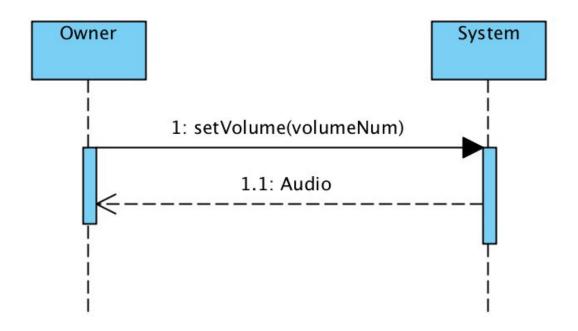

Contract CO4: setVolume

Operation	setVolume(volumeNum)
Cross References	Use Cases: Changing the Volume
Preconditions	The machine is on, and a radio station is playing
Postconditions	The machine was on and playing music. The volume was too loud, so it was adjusted to a comfortable setting.

Set the Time:

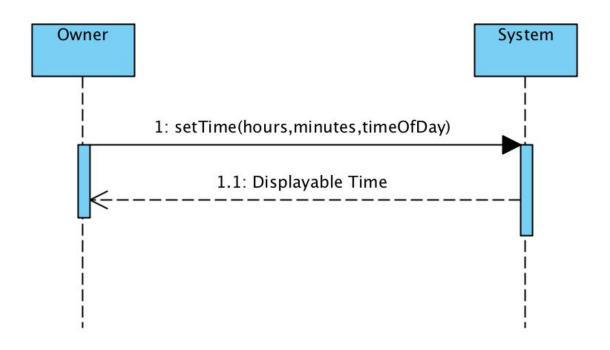


Contract CO5: setTime

Operation	setTime(hours, minutes, timeOfDay)
Cross References	Use Cases: Setting the Time
Preconditions	The machine is on, and the user has decided to adjust the time
Postconditions	The machine was on, and the time was incorrect. The clock was adjusted, and the correct time was displayed.

Object Sequence Diagrams


Set the Time:

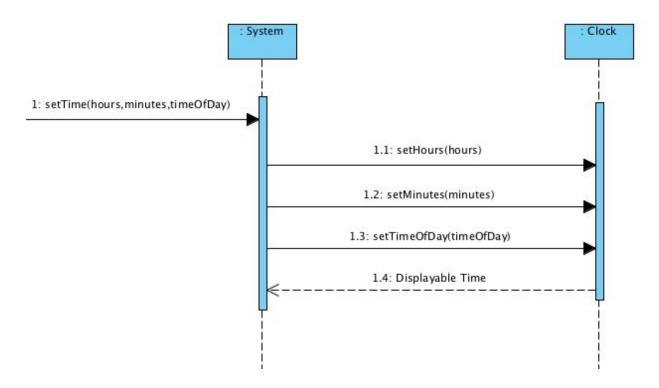

Contract CO1: setTime

Operation	setTime(hour, minutes, timeOfDay)
Cross References	Use Cases: Setting the Time
Preconditions	The controller was requested to set the time
Postconditions	-a new instance of Clock was created -the Clock's hour attribute was set to desired time -the Clock's minutes attribute is set to desired time -the Clock's timeOfDay attribute was set to desired time of day


Turn the Radio ON/OFF:

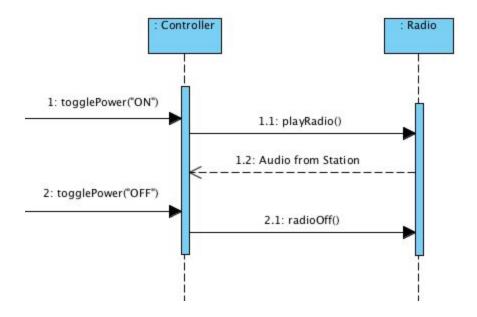

Contract CO2: turnRadioON/OFF

Operation	togglePower(power: String)
Cross References	Use Cases: Turn the Radio ON/OFF
Preconditions	The controller is being requested to turn the radio on
Postconditions	-a new instance of Radio was created -the power attribute was changed to desired setting -the method playRadio was called -Audio was sent from the Radio object to the controller


Snooze the Alarm:

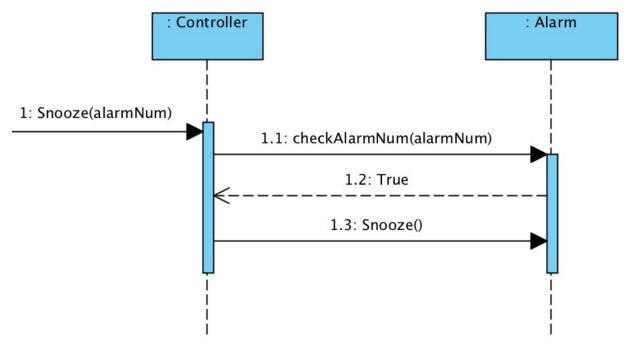

Contract CO3: snoozeAlarm

Operation	snooze(alarmNum: int)
Cross References	Use Cases: Snoozing the Alarm
Preconditions	One or both alarms are going off, and the controller has been requested to snooze the alarm(s)
Postconditions	-the checkAlarm() method was called on an instance of an Alarm -The alarm number was returned to the controller -the method snoozeAlarm() in the controller was called -the alarm was snoozed


Adjust the Volume:

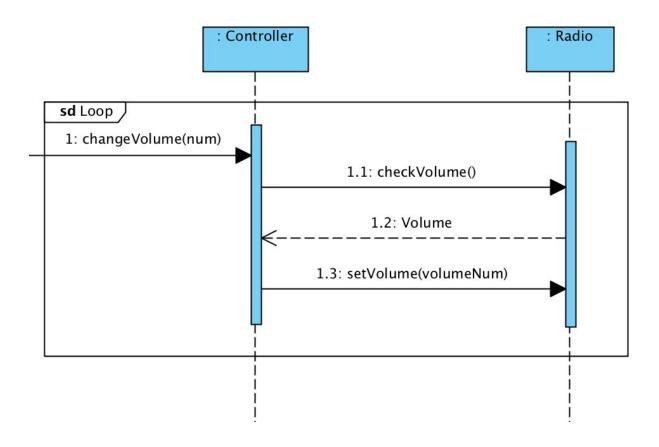

Contract CO4: adjustVolume

Operation	changeVolume(num: int)
Cross References	Use Cases: Adjust the Volume
Preconditions	The machine is on, and the controller has been requested to adjust the volume.
Postconditions	-a method checkVolume() was called on controller -an instance of Radio was previously created -the Radio attribute volume was returned to the controller -a method setVolume(num: int) was called with that attribute number -the volume attribute of the Radio object was changed again to the new number

Set Alarm:

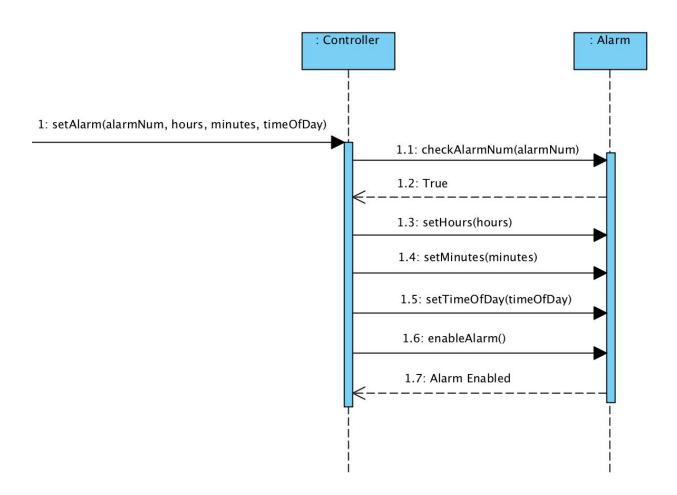

Contract CO5: setAlarm

Operation	setAlarm(alarmNum, hour, minutes, timeOfDay)
Cross References	Use Cases: Set the Alarm
Preconditions	The machine is on, and the controller has been requested to set either alarm one or alarm two.
Postconditions	-two instances of Alarm were created -the correct alarm number was found -the Alarm hour attribute was changed to desired time -the Alarm minutes attribute was changed to desired time -the Alarm timeOfDay attribute was changed to desired time of day -the Alarm enable attribute was changed to desired setting

Glossary

- Dual Alarm AM/FM Clock Radio: A clock that supports the setting of two alarms and has the capability of receiving and interpreting radio waves to output information to the user.
- Vision: A short executive overview document for quickly learning the project's big ideas
- AM/FM: Amplitude Modulation and Frequency Modulation, respectively. These are forms of modulation in which either the amplitude(strength) or frequency of a carrier wave is varied. The clock radio can be used with either setting.
- Software: The part of the computer system that consists of encoded information or computer instructions.
- Extensions: alternate scenarios
- Snooze: Delaying the alarm for another 9 minutes
- Domain: a formal boundary that defines a particular subject or area of interest
- Domain model: illustrates noteworthy concepts in a domain
- Use Case: a list of actions or event steps, typically defining the interactions between a role and a system, to achieve a goal
- System Sequence Diagram:
- Object Sequence Diagram:
- Preconditions:
- Postconditions:
- Operation Contracts:
- Cross References: