
Retractable Bleacher Seating: Room 413 Project Information

Caldwell High School, 3401 S Indiana Avenue, Caldwell, ID 83605 | Prepared October 29, 2026

Contact: Chad Lawson, Media Technologies and District Esports Coordinator | clawson@caldwellschools.org | 208-455-3304 ext. 2136

We are looking at a retractable seating system for a media and esports classroom. The room is 400 in. by 376 in. with a 10 ft ceiling, and the seating would face three wall-mounted displays on the north wall. The same room is used as a regular class, so the seating has to fold back and clear the floor. Please review the drawing and notes below and send specifications and budgetary pricing for the options that fit. Items marked as assumptions are open and we welcome your recommendation.

Room 413 | plan view (inches unless noted)

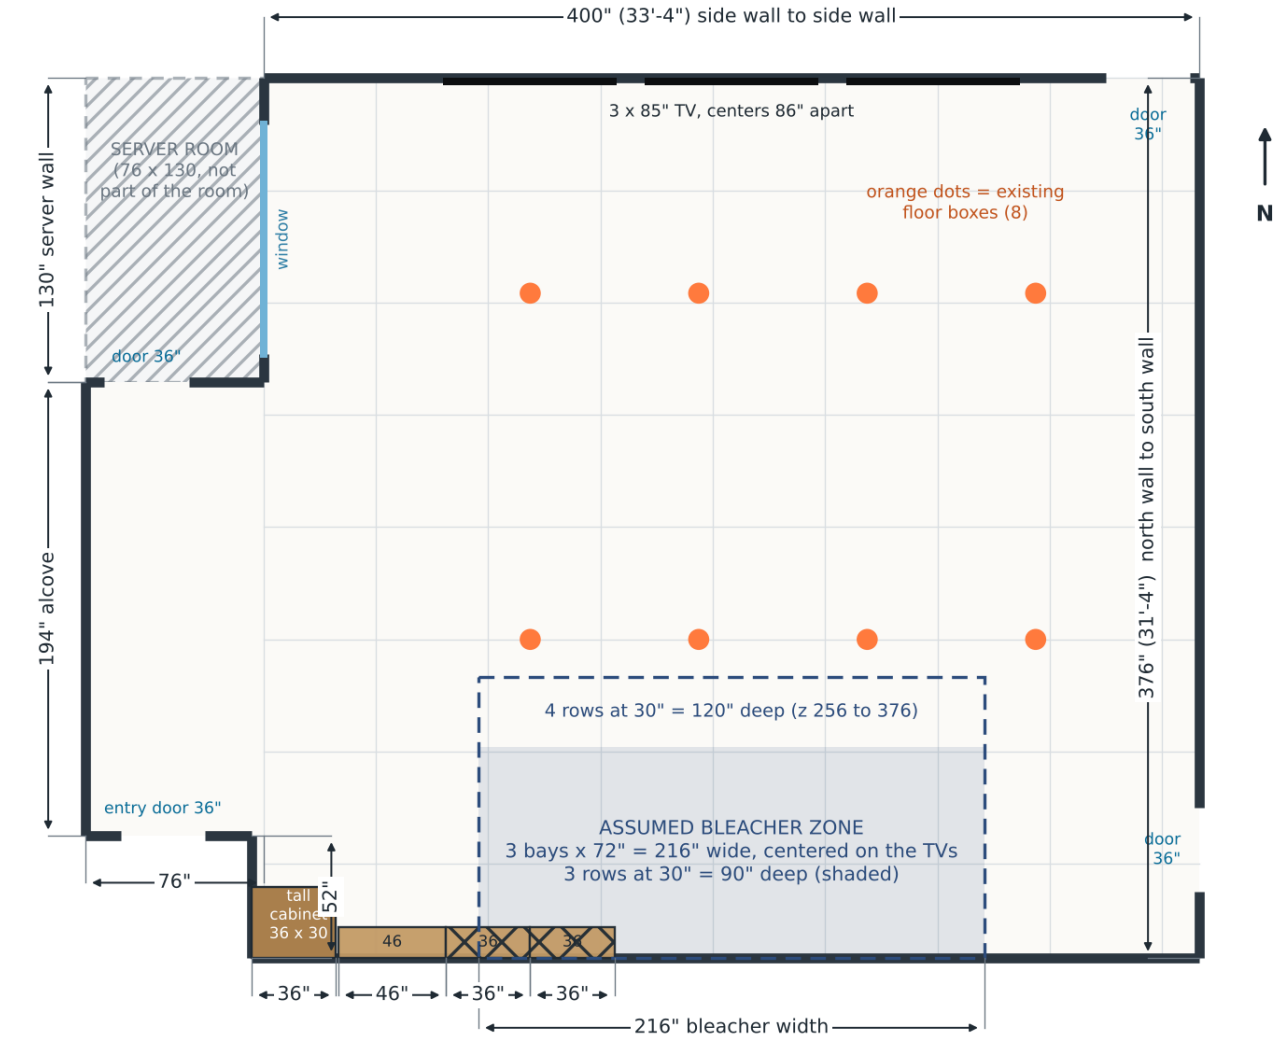

Wall cabinets 13" deep, 58" to 85" above floor (the two hatched 36" units are the likely removals).
Tall cabinet 85" high. Ceiling 120" (10 ft).

Figure 1. Plan view, inches unless noted. North is up. The dashed outline shows the largest seating footprint under consideration; the shaded area shows the 3-row option.

Key dimensions

Item	Dimension
Room, side wall to side wall	400 in. (33 ft 4 in.)
Room, north wall to south wall	376 in. (31 ft 4 in.)
Ceiling height	120 in. (10 ft)
Seating wall (south)	Full 400 in. width; wall cabinets and one tall cabinet along the west portion (see below)
Displays	Three 85 in. TVs on the north wall, centers 86 in. apart, centered on the room
Doors	North wall (near east corner), east wall (near south corner) and a southwest entry; all 36 in. openings
Alcove at southwest	76 in. wide, 194 in. long, open to the room
Floor	Level; floor type and slab details to be confirmed on site

South wall conditions

- **Wall cabinets:** three, 46, 36 and 36 in. wide, running west to east. All are 13 in. deep, 27 in. tall, mounted with the bottom 58 in. and the top 85 in. above the floor.
- **Tall cabinet:** 36 in. wide, 30 in. deep, 85 in. high, at the west end against the entry pier.
- **Likely changes:** the two 36 in. wall cabinets would be removed if the seating is centered on the displays. The 46 in. cabinet and the tall cabinet would stay.
- **Wall construction and backing:** not yet verified. We will confirm what is behind the cabinets before any wall attachment.

Seating the room is meant to hold

These are working assumptions, not requirements:

- **Capacity:** about 24 to 36 spectator seats. The drawing assumes three 72 in. bays with three seats each (216 in. total width).
- **Option A, 3 rows:** about 90 in. deep at 30 in. row spacing.
- **Option B, 4 rows:** about 120 in. deep at 30 in. row spacing. Chair-back systems list row spacing of 28 to 33 in., so four rows run deeper than the 24 in. rows shown in our early layouts.
- **Chairs:** chair-back or platform seating preferred over plain benches; folding or fold-down seats that stow with the platform.
- **Operation:** manual or power-assist, whichever suits a small room. Class use is daily, so it needs to be quick and safe for staff to operate.
- **Retracted depth:** we need to know how far the stowed system sticks out from the south wall, since the floor in front is classroom space.

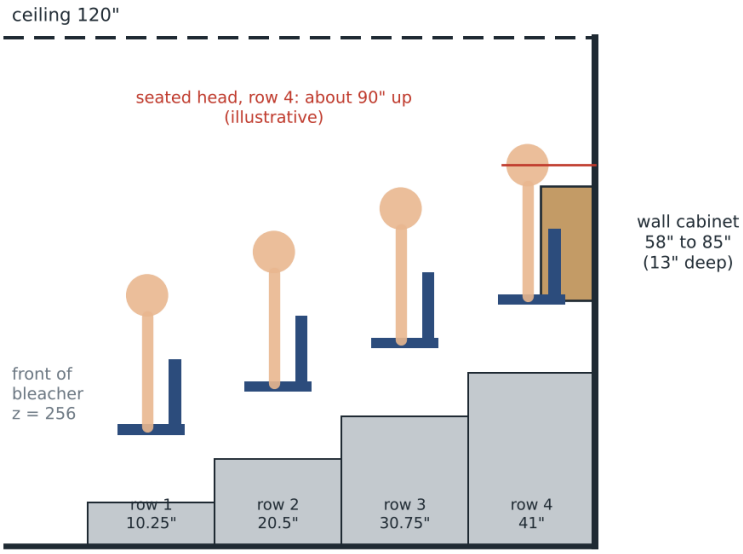


Figure 2. Illustrative section at x = 120 in., 4 rows at 30 in. spacing and 10.25 in. rise. Seat and body heights are assumptions. The top row sits in the same space as the 58 to 85 in. wall cabinet, which is why the cabinets are the first thing to resolve.

Examples of retractable systems we are considering

Published manufacturer information only. Please correct anything that does not apply to your configuration.

System	What it is	Published specs
Interkal VISION on the Wide Deck Premier platform	Telescopic platform with fold-down chair-back seating, blow-molded plastic with cast aluminum brackets.	Row spacing 30, 32 or 33 in. Minimum rise 10.25 in. Seat widths 19 to 24 in., plus an 18 in. armless option. Manual, semi-manual or semi-automatic (gas strut) fold-down. Optional tablet arms, cup holders and row/seat numbers. 15 standard colors.
Interkal POLARIS multi-purpose seat	Bench-and-chair seat for telescopic systems and stadium seating, with optional backrest and armrests.	Row spacing 26 in. (bench only), 28 in. (with backrest or backrest and armrests), 30 in. (with backrest and cup-holder armrests). Seat widths 18 to 23 in. Seat depth 13.5 in. Rise and retracted depth not stated.
Hussey Seatway TP telescopic platform	Retractable platform available wall-attached, recessed into a wall pocket, or portable on locking floor pintels.	Seat options include Gallery 3, Club Bench, Metro, Premia and the Quattro Collection. Manual or power-assisted. The Club Bench needs a minimum rise just under 10.5 in. Row depth and retracted depth are not published.

Questions for your team

- What is the stowed depth from the wall for 3 and for 4 rows, with chairs folded?
- Which configurations fit a 400 in. wide, 376 in. deep room with a 120 in. ceiling and 36 in. doors, and what row spacing and rise do you recommend?
- Wall-attached, recessed or portable? What are the wall backing and floor requirements for each?
- What are the guardrail, handrail and access requirements at the top row, and which standard does the system meet (for example ICC 300)?
- Manual versus power-assist: operating effort, power requirement and typical service interval.
- Per-seat and per-bay budgetary pricing for both options, plus delivery, installation and lead time.
- Do you offer a site visit or a field check of the south wall before final design?

Assumptions and sources

Dimensions come from our own floor plan and field measurements and are accurate to about an inch. The server-room walls are not part of this inquiry. Bleacher footprints in Figure 1 are our working assumptions. Product details are from the manufacturers' public pages: Interkal VISION, Interkal POLARIS and Hussey Seatway TP.