
# Closed / finished fit

Nominal assembly envelope at this pose: 189.200 × 59.700 × 139.200 mm (X / Y / Z)

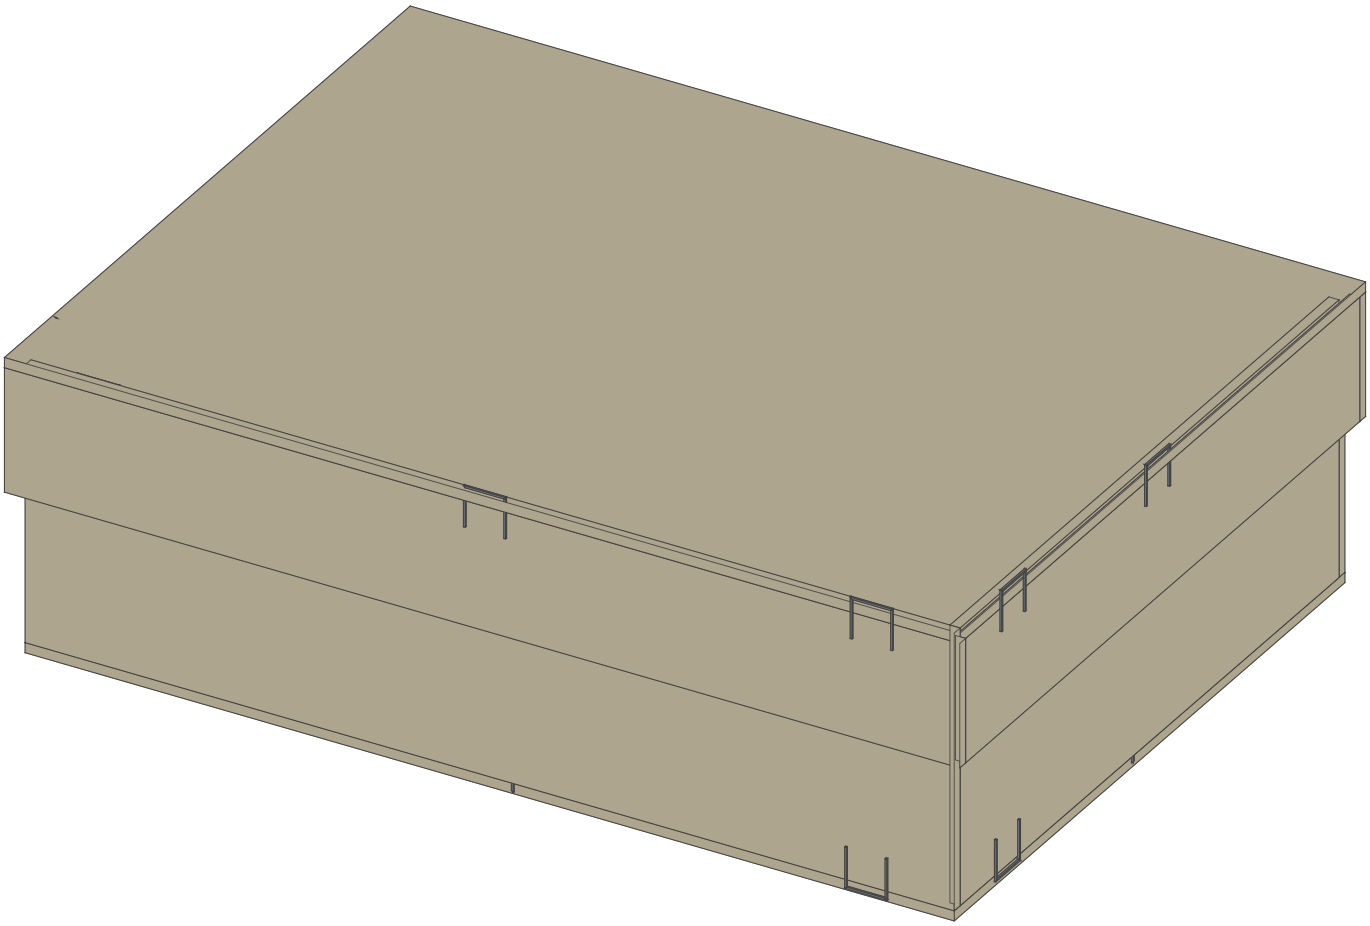


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

# Partially lifted lid

Nominal assembly envelope at this pose: 189.200 × 84.660 × 139.200 mm (X / Y / Z)

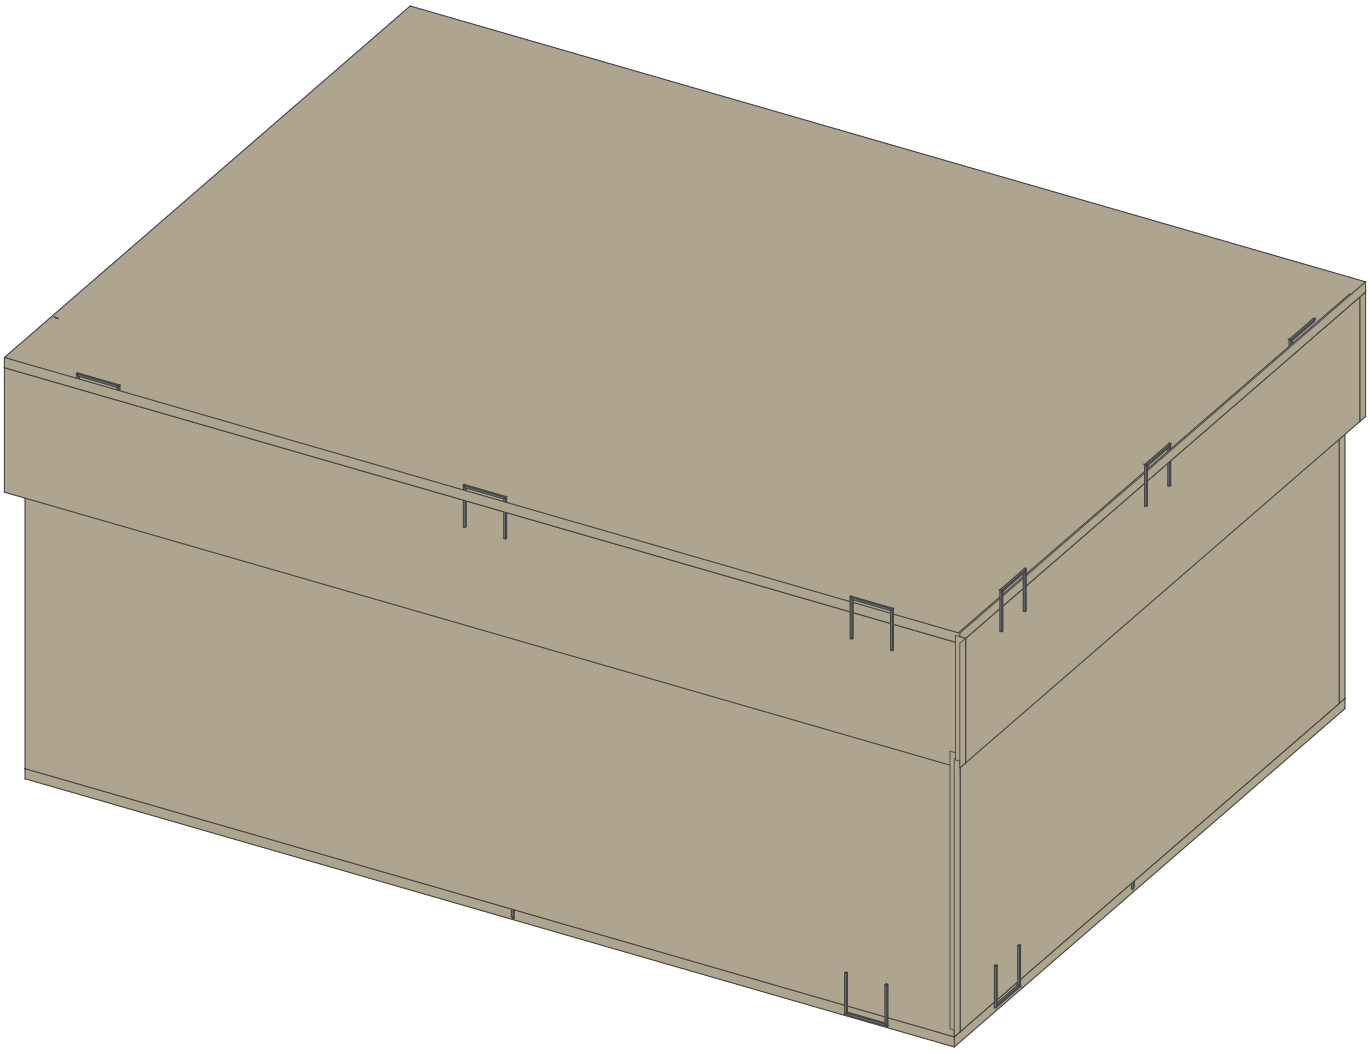


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

# Removed lid / interior

Nominal assembly envelope at this pose: 418.200 × 57.350 × 139.200 mm (X / Y / Z)

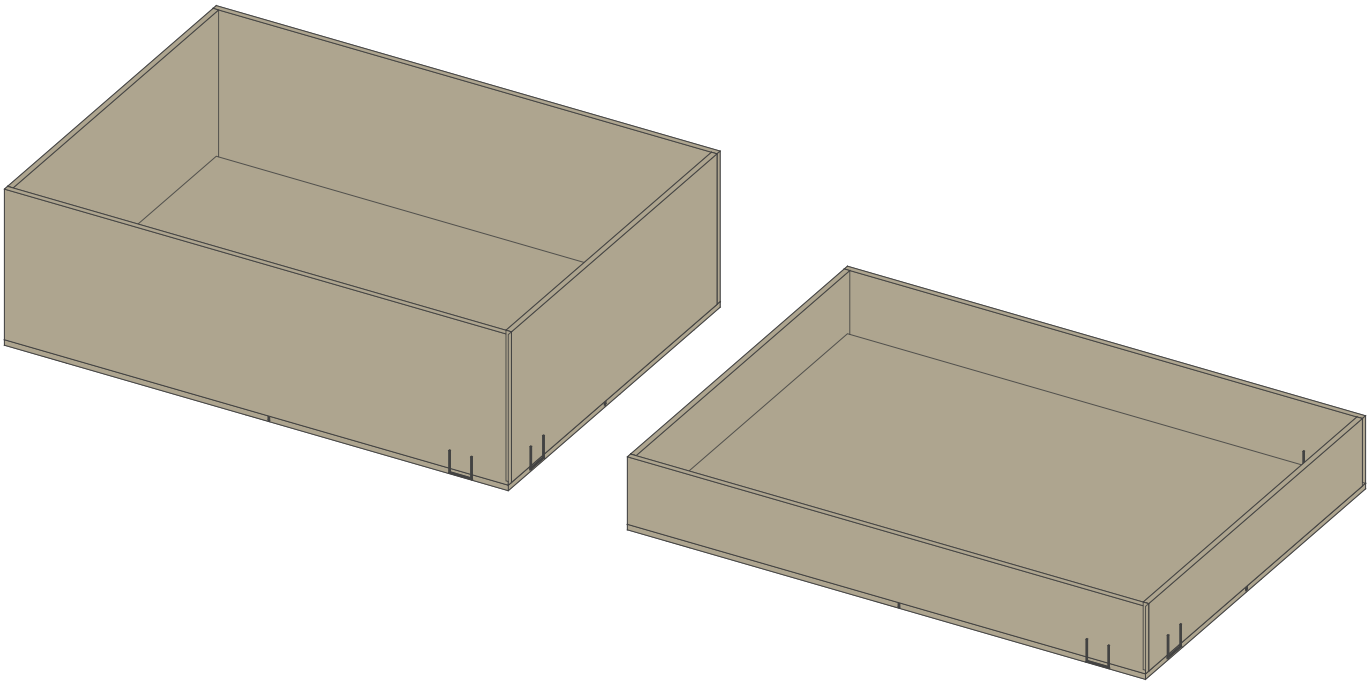


Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

# Exploded independent stock

Nominal assembly envelope at this pose: 462.200 × 141.700 × 183.200 mm (X / Y / Z)

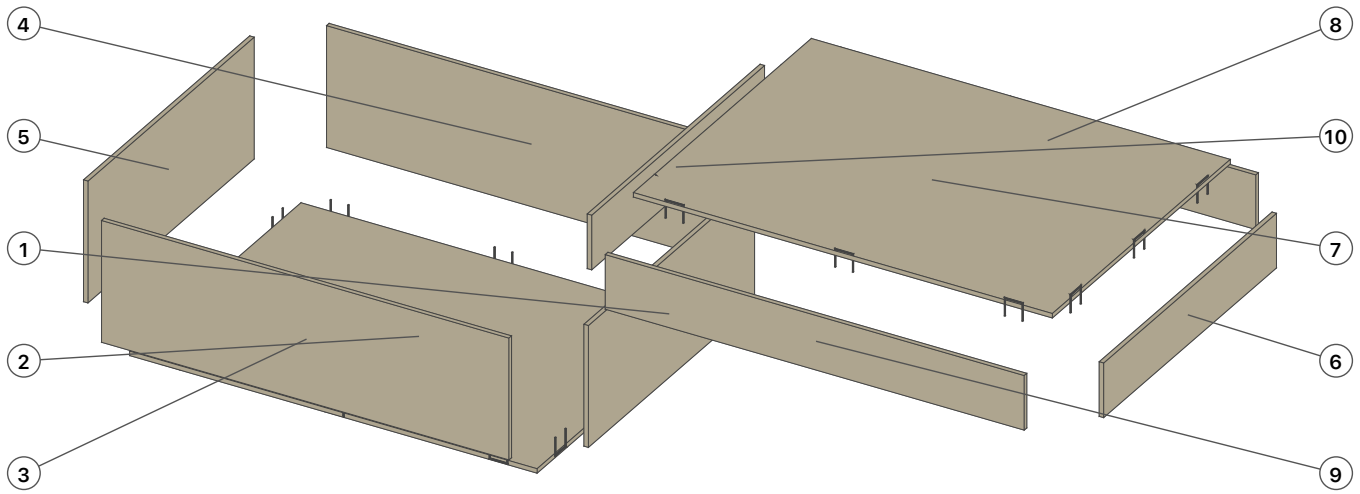


1 b-e

2 b-floor

3 b-n

4 b-s

5 b-w

6 l-e

7 l-floor

8 l-n

9 l-s

10 l-w

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

# Closed length section / actual layers

Nominal assembly envelope at this pose: 189.200 × 59.700 × 139.200 mm (X / Y / Z)



Section plane X = 0.0 mm. Independent material layers retain their declared calipers.

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

# Closed width section / actual layers

Nominal assembly envelope at this pose: 189.200 × 59.700 × 139.200 mm (X / Y / Z)



Section plane Z = 0.0 mm. Independent material layers retain their declared calipers.

Nominal centered-stock panels, declared ply calipers and actual rectangular installed wire sections; separate native view verifies curved bends, relief and material response. Diagram is not a machine tool path.

Reference diagram fitted to this page. Use Actual-size-pattern-proofs.pdf or nominal SVG files for physical cut scale.
Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

## 04A / Bare board · actual through-floor staples / source-authored assembly order

Source 022e13dfaa15e1a5d1e58adbb54509d01efd2ae8fcd6438a967b3fe2bb903052

Production quantity 1. Nominal millimeters; no cutter compensation applied. Printing, score/groove tool paths, fold/turn-in/seam guides, and assembly marks remain distinct.

## 1. Cut independent stock

Parts: b-floor, b-n, b-e, b-s, b-w, l-floor, l-n, l-e, l-s, l-w

Cut separate boards, selected backing and physical seating parts at their nominal contours. Grain and all quantities come from each piece. No score or groove is implied on independent boards. Retain printed source registration.

## 2. Assemble supported board joints

Parts: b-floor, b-n, b-e, b-s, b-w, l-floor, l-n, l-e, l-s, l-w

Joints: b-floor-n, b-floor-e, b-floor-s, b-floor-w, l-floor-n, l-floor-e, l-floor-s, l-floor-w

Dry assemble the selected floor and spanning-wall arrangement. Apply only the declared board glue regions. Where selected, drive the configured staples from the bare floor underside into the actual wall bottom edges. Inspect receiving depth and both leg paths. Do not substitute a carton or publication stapler. Tool settings require a physical sample.

## Independent cutting and materials

b-floor / Base floor / top / group base / Recycled greyboard, 2.000 mm / 184.000 × 134.000 mm / cut 1 / grain parallelWidth.

b-n / Base Front wall / group base / Recycled greyboard, 2.000 mm / 184.000 × 55.000 mm / cut 1 / grain parallelWidth.

b-e / Base Right wall / group base / Recycled greyboard, 2.000 mm / 130.000 × 55.000 mm / cut 1 / grain parallelWidth.

b-s / Base Back wall / group base / Recycled greyboard, 2.000 mm / 184.000 × 55.000 mm / cut 1 / grain parallelWidth.

b-w / Base Left wall / group base / Recycled greyboard, 2.000 mm / 130.000 × 55.000 mm / cut 1 / grain parallelWidth.

l-floor / Lid floor / top / group lid / Recycled greyboard, 2.000 mm / 189.200 × 139.200 mm / cut 1 / grain parallelWidth.

l-n / Lid Front wall / group lid / Recycled greyboard, 2.000 mm / 189.200 × 24.650 mm / cut 1 / grain parallelWidth.

l-e / Lid Right wall / group lid / Recycled greyboard, 2.000 mm / 135.200 × 24.650 mm / cut 1 / grain parallelWidth.

l-s / Lid Back wall / group lid / Recycled greyboard, 2.000 mm / 189.200 × 24.650 mm / cut 1 / grain parallelWidth.

l-w / Lid Left wall / group lid / Recycled greyboard, 2.000 mm / 135.200 × 24.650 mm / cut 1 / grain parallelWidth.

Recycled greyboard / 2.000 mm: 1 sheet allocation(s), 0.102 m² net pieces, 0.700 m² stock. Nesting waste 85.496%; explicit additional allowance 8.000%. Repacking never moves canonical artwork.

## Board-joint staple schedule

b-floor-n/wire:0 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch

instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-n/wire:1 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-n/wire:2 → joint b-floor-n. Entry b-floor; receiving b-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-n [2.175, 8.000] mm

b-floor-e/wire:0 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-e/wire:1 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the

declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-e/wire:2 → joint b-floor-e. Entry b-floor; receiving b-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-e [2.175, 8.000] mm

b-floor-s/wire:0 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-s/wire:1 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-s/wire:2 → joint b-floor-s. Entry b-floor; receiving b-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 74.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-s [2.175, 8.000] mm

b-floor-w/wire:0 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

b-floor-w/wire:1 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

b-floor-w/wire:2 → joint b-floor-w. Entry b-floor; receiving b-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 47.000 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

Leg 2: b-floor [0.175, 2.175] mm; b-w [2.175, 8.000] mm

l-floor-n/wire:0 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-n/wire:1 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-n/wire:2 → joint l-floor-n. Entry l-floor; receiving l-n. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-n [2.175, 8.000] mm

l-floor-e/wire:0 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-e/wire:1 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-e/wire:2 → joint l-floor-e. Entry l-floor; receiving l-e. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-e [2.175, 8.000] mm

l-floor-s/wire:0 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-s/wire:1 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-s/wire:2 → joint l-floor-s. Entry l-floor; receiving l-s. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 76.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-s [2.175, 8.000] mm

l-floor-w/wire:0 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

l-floor-w/wire:1 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare

board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

l-floor-w/wire:2 → joint l-floor-w. Entry l-floor; receiving l-w. Crown 8.000 mm, wire 0.350 × 0.350 mm, legs 8.000 mm; buried. Tool: Declared narrow-nose board-edge stitcher; physical trial required. Install 1: Bare board underside into wall bottom edge, before tape / covering / lining. Source coordinate positions/orientation and actual leg/material intervals are in Staple-schedule.json. These are assembly marks, not drill/punch instructions.

Entry side inside. Driver access 24.000 mm; clearance 0.500 mm; minimum receiving depth 2.000 mm, edge distance 0.150 mm, end margin 0.100 mm; maximum joint gap 0.200 mm. Definition count 3, spacing 49.600 mm. Receiving entry boundaries: cutEdge, cutEdge. Through-exit geometry is recorded independently of the declared buried/exposed/clinch termination.

Leg 1: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

Leg 2: l-floor [0.175, 2.175] mm; l-w [2.175, 8.000] mm

## Adhesive declarations

b-floor-n/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-e/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-s/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

b-floor-w/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on b-floor / b-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-n/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-n are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-e/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-e are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-s/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-s are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

l-floor-w/glue: PVA board-edge bond / prototype allowance, effective 0.030 mm, coverage 90.000%. Bond regions and exclusions on l-floor / l-w are retained in Adhesive-regions.json; no bond-strength simulation is claimed.

## Recorded construction/process assumptions

Original CASK / COLLECT project-authored example, using generic independently stocked cut-piece hinge

trees. Every separate board is one actual piece; covering hinges are physical folds, not board scores.

Material appearance, dry adhesive layers, calipers, backed-fabric ply ratio, turn-in allowances and wire tool access are declared prototype assumptions. Stock/vendor strength, moisture, compression and sliding force require physical samples.

Finished usable space is bounded by the largest actual inward local tape / lining / turn-in buildup. Liners deliberately stop short of tape and turn-ins; they do not silently stack through those pieces.

Lid clear span is derived from the base finished side envelope over the overlap region plus twice the per-side running clearance. Exterior seating ledges below that region do not enlarge the sliding opening.

Cross-wrap neutral-line edge allowance is board caliper plus two bond layers and one covering caliper. The two side faces carry corner tabs and therefore double build; front/back carry one layer. Band mode has one front seam overlap; its asymmetric finished envelope shifts the closed lid centre. All local buildups remain actual geometry.

Band-and-patch mode applies the exterior face patch first, then overlaps bottom turn-under flaps. The central patch is locally recessed by one covering/bond layer; no imaginary air layer flattens it.

Staple route accepted here: separate floor below walls, driven from floor underside into vertical wall bottom edges. Buried termination is intentional. Inset floor plus staples rejects rather than reinterpreting the receiving route.

Wire crown buildup is retained. Covered stapled halves contain a real slotted leveling backing with thickness equal to the wire depth. Four retained vent/clearance slots support per-seam method switching.

A lid is one coherent parent group. Closed, raised, fully removed and exploded views share the same accepted dimensions and canonical artwork. Presentation does not change fit or cutting files.

Seating is physical: zero axial space is actual ceiling/rim contact; positive top-seat space creates rim shims; locked overlap creates exterior stop ledges. Conflicting locked depth/headspace rejects.

Finish relief adds up to 0.08 mm above the lid exterior cap. The lid finished skirt-depth control excludes this local decorative peak; exact physical envelope reports it separately.

All production cut channels are actual-size nominal design geometry. No kerf or blade compensation is silently applied. Technical guides and staple placement marks are not cutting or punching commands.

Repacking stock changes material sheet placement only. It never changes canonical artwork, finish-mask IDs, source dimensions, source anchors, folded geometry or saved options.

Declared kerf assumption: 0.000 mm. It has not been applied to these nominal cut files; do not compensate twice.

Nominal design packet; physical print bleed, cutter compensation and stapler adjustment require explicit production settings. No machine commands are issued.

Actual manufacturing samples, sliding feel, material compression, staple performance and bond strength remain physical evaluations. No printing, cutting, machine motion or heating command was sent.