NOTES:

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	Re ordered Header and Font Size to Customers Note 600V, 5-conductor (3-phase, neutral, ground), 10AWG cable	2026-01-06	
D.1	PinOut Add	1/8/2026	
D	Detailed Pinouts A and B	2026-01-08	

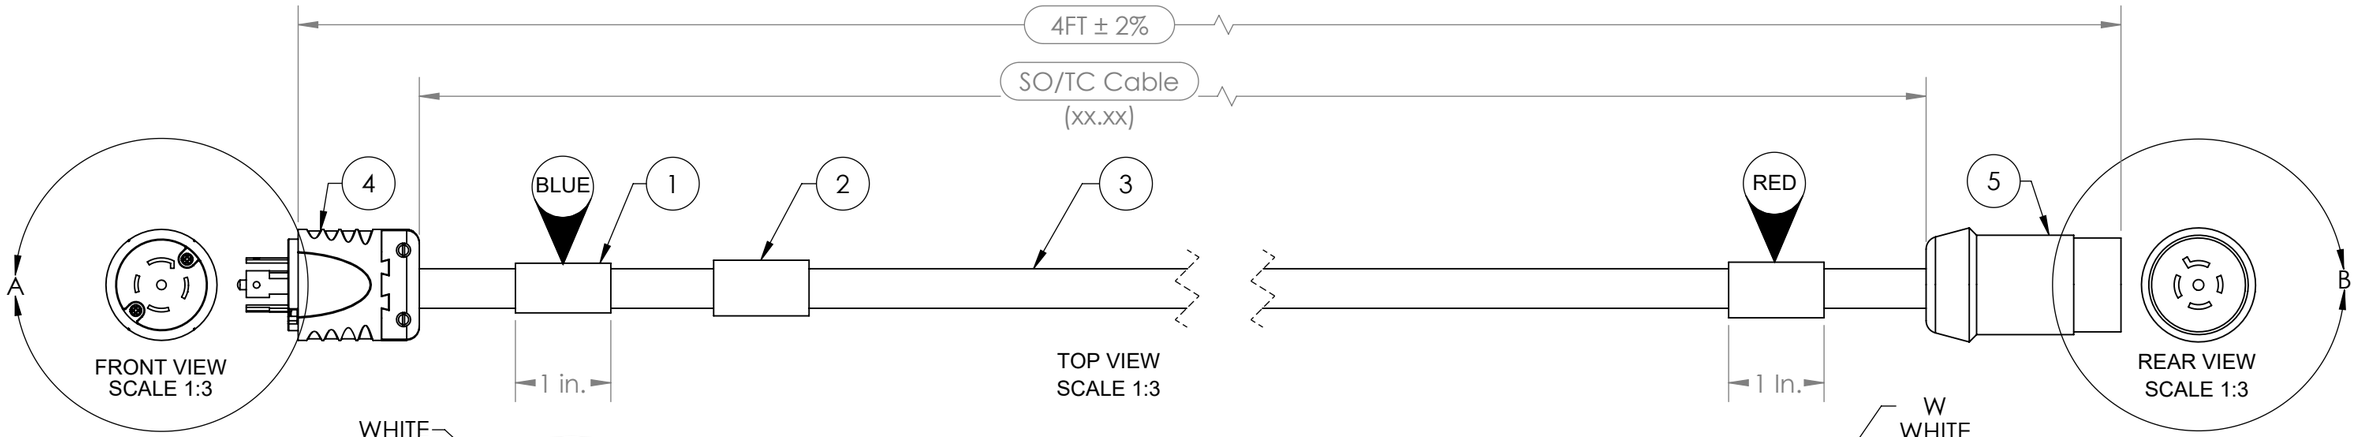

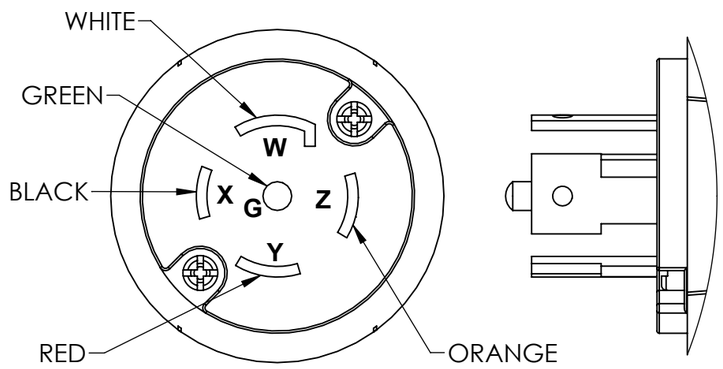

DETAIL A
SCALE 1 : 1

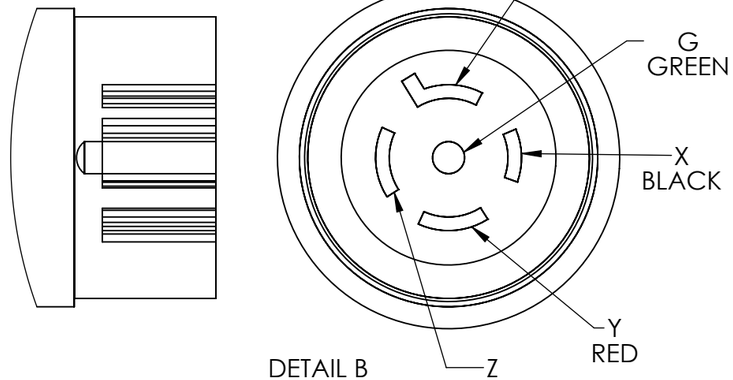

DETAIL B
SCALE 1 : 1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	UL Label	UL Labels,1 Blue,1 RED	2
2	Additional Labels	Optional Addtional Label	1
3	VARIABLE BASED ON ORDER NUMBER	Wire 600V, 5-conductor (3-phase, neutral, ground), 10AWG cable 105°c	1
4	L22-30P	Plug Turn-Lock Plug L2230P, SO/TC, Male 30A, Listed	1
5	L22-20R	Turn-Lock L2220C, SO/TC, Female,Connector 20A, Listed	1

PROPRIETARY AND CONFIDENTIAL

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

UNITS: ft [in]

UNLESS OTHERWISE SPECIFIED
X = ± 1
X.X = ± 0.5
X.XX = ± 0.30
X.XXX = ± 0.130
ANGULAR
X = 1°
.X = 0.5°
.XX = 0.25°

COMMENTS:

	NAME	DATE
DRAWN BY	CS	2026-01-06
APP. BY	BL	2025-12-19

INTERPRET TO ASME Y14.100

ENCONNEX
4670 AIRCENTER CIRCLE
RENO, NV 89502

MATERIAL: N/A

FINISH: N/A

CLASS:

ECO NUMBER:

DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX

DESCRIPTION:
WHIP,L2230P, PLUG, MALE, SO/TC TURN-LOCK L2220C, SO/TC, FEMALE,CONNECTOR

SIZE:	DRAWING NO:	REV NO:
B	**PW4K-L2220CL2230P-001**	**D**

SCALE: 1:5 | WEIGHT: | SHEET: 1 OF 1