https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

Chapter 6

Managing Cisco Devices

To help you manage Cisco devices day-to-day, you need to understand a few basic topics. The ICND1 exam expects you to know how to back up and restore the Cisco IOS and configuration files to and from a TFTP server. You are also expected to know how to use the Cisco Discovery Protocol to identify other Cisco devices on the network and details about those devices, and to understand how to remotely connect to a device via telnet and manage your telnet sessions. This chapter tests on these issues and more.

The Problems You'll Work On

In this chapter, you'll review questions concerning the following topics:

- Backing up and restoring the Cisco IOS and configuration files to and from a TFTP server
- Knowing how to control which IOS image file the Cisco device will use on startup
- Understanding the purpose of CDP and its default values
- Knowing how to alter CDP settings such as the CDP timer and the CDP hold timer
- Comprehending the requirements to use telnet for remote administration and how to manage your telnet session

What to Watch Out For

Don't let common mistakes trip you up; watch for the following when working with these questions:

- You must know the syntax for the copy command (copy <source> <destination>) to perform backup and restores of your IOS image and configuration files. For example, **copy flash TFTP** would back up your IOS to a TFTP server, but **copy TFTP running-config** would restore your running configuration from a TFTP server.
- Know the ports used by the protocols discussed in this chapter. Telnet uses TCP port 23, SSH uses TCP port 22, and TFTP uses UDP port 69.
- The Cisco Discovery Protocol is a Cisco proprietary protocol used to discover information about neighboring (directly connected) Cisco devices. Know that the CDP advertisements are sent out every 60 seconds (known as the CDP timer) and stored for 180 seconds (known as the hold timer) by the receiving Cisco device. You can change the CDP timer and hold timer with the global configuration commands of **cdp timer** and **cdp holdtimer**. You can also use the `show cdp` command to view the configuration of CDP.

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

Backup and Remote

200–212 Express the given number in scientific notation.

200. Which of the following connectionless application layer protocols is used to transfer Cisco IOS images and configuration files to a backup location?

(A) TFTP

(B) FTP

(C) Telnet

(D) SSH

201. Your coworker would like to back up the router configuration to a TFTP server. What command would you use to back up your running configuration to a TFTP server?

(A) `backup running-config tftp`

(B) `copy running-config tftp`

(C) `backup tftp running-config`

(D) `copy tftp running-config`

202. A few weeks ago, you backed up your router configuration to a TFTP and now you wish to restore the configuration back to your router. What command would you use?

(A) `backup running-config tftp`

(B) `copy running-config tftp`

(C) `backup tftp running-config`

(D) `copy tftp running-config Copy flash tftp`

203. Susan types the preceding command on her company router. What is the command's purpose?

(A) To back up the IOS image to a server

(B) To back up the router running configuration to a server

(C) To back up the router startup configuration to a server

(D) To back up the routing table to a server

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

204. Which of the following command associations are true? (Select two.)

(A) Restore the config➪`copy running-config tftp`

(B) Back up the IOS➪`copy tftp flash`

(C) Replace the IOS➪`copy tftp flash`

(D) Replace the IOS➪`copy flash tftp`

(E) Back up the IOS➪`copy flash tftp`

205. In the figure below, what is the purpose of address 192.168.1.3?

```
R2#copy running-config tftp
Address or name of remote host []? 192.168.1.3
Destination filename [R2-confg]? R2-Backup-Config

!! [OK - 459 bytes]
459 bytes copied in 3.006 secs (0 bytes/sec)
R2#
```

(A) It is the address of the router to use to reach the TFTP server.

(B) It is the IP address of the device whose running-config you wish to back up.

(C) It is the address of the TFTP server to copy the running configuration to.

(D) It is the address of the TFTP server to copy the running configuration from.

206. Which of the following commands allows you to view the filename of your IOS?

(A) `show IOS`

(B) `show flash`

(C) `show filename`

(D) `show ios filename`

207. What happens if you are copying a new IOS image to flash memory and there is not enough available space due to space used by your existing IOS file?

(A) The old IOS file is deleted to make room.

(B) The copy operation fails.

(C) The copy operation succeeds but with no data in the file.

(D) The old file is renamed.

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

208. You are looking to create a backup copy of your Cisco IOS to a TFTP server. What command would you use?

(A) `backup flash tftp`

(B) `copy IOS tftp`

(C) `backup tftp flash`

(D) `copy flash tftp`

209. What port does TFTP use?

(A) TCP 23

(B) UDP 69

(C) TCP 21

(D) UDP 21

(E) TCP 69

(F) TCP 22

210. You have three IOS image files in flash memory. What command would you use to control which IOS is used when the router starts up?

(A) `boot startup`

(B) `startup`

(C) `boot system`

(D) `load image`

211. You are having issues with your router, which currently does not have network access or an IOS. What protocol could you use to transfer an IOS image to the router?

(A) xmodem

(B) tftp

(C) ftp

(D) snmp

212. What command would you use to ensure that the Cisco router loads the IOS image file of c2800nm-advipservicesk9-mz.124-15.T1.bin from flash memory?

(A) `boot system tftp c2800nm-advipservicesk9-mz.124-15.T1.bin`

(B) `boot startup flash c2800nm-advipservicesk9-mz.124-15.T1.bin`

(C) `boot system flash c2800nm-advipservicesk9-mz.124-15.T1.bin`

(D) `boot startup tftp c2800nm-advipservicesk9-mz.124-15.T1.bin`

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

Cisco Discovery Protocol (CDP)

213–226 Express the given number in scientific notation.

213. You need to identify other Cisco devices on the network; which Cisco protocol do you use?

(A) Spanning Tree Protocol

(B) Point-to-Point Protocol

(C) Cisco Discovery Protocol

(D) Discovery Device Protocol

214. You are connected to the console port of router R3 shown in the figure below. When you use CDP to display other network devices that have been discovered, what devices will you see?

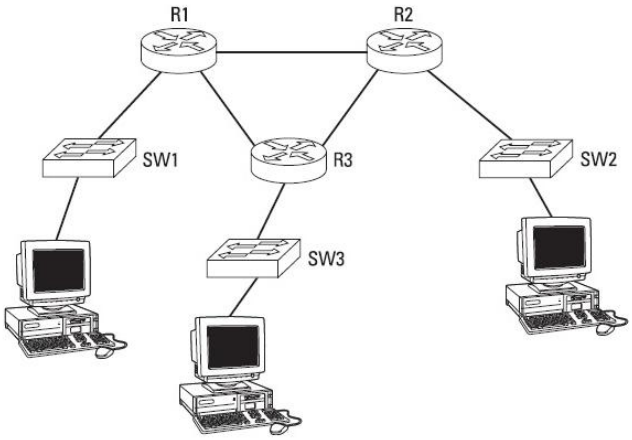

(A) R1, R2, SW1, SW2, SW3

(B) R2, SW3

(C) R1, R2, SW2

(D) R1, R2, SW3

215. Which of the following statements are true in regards to CDP? (Select three.)

(A) CDP is a Cisco proprietary protocol.

(B) CDP is an industry standard protocol.

(C) CDP runs at the network layer.

(D) CDP runs at the data link layer.

(E) CDP discovers all devices on the network.

(F) CDP discovers directly connected devices.

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

216. You are the network administrator for the network shown in the figure below. Your manager would like to ensure that CDP advertisements are not sent out to the Internet from router HO1, but they should be sent to the Toronto and Boston routers. What should you do?

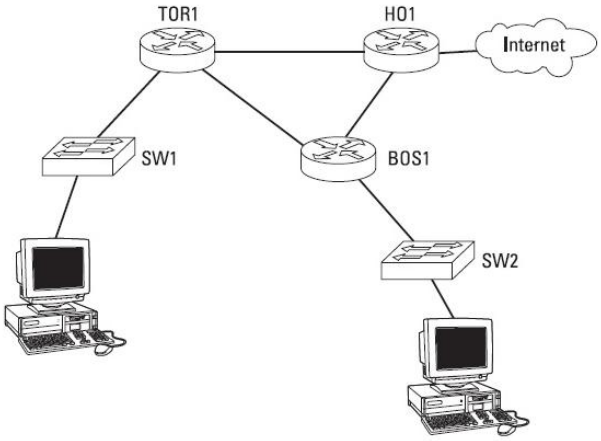

(A) Disable CDP on the interfaces connected to routers R1 and R2.

(B) Disable CDP on the HO1 router.

(C) Disable CDP on each interface on router R1.

(D) Disable CDP on the interface connected to the Internet.

217. You are the network administrator for a small network. You are connected to the console port on a switch and would like to telnet into the router on the network, but you forget the IP address of the router. What command could you use to determine the IP address of the router?

(A) `show ip interface brief`

(B) `show cdp neighbors detail`

(C) `show cdp`

(D) `show ip neighbors`

218. There is a switch on the network called NY-SW1. What command would you use on the router to determine the model number of that switch?

(A) `show cdp entry NY-SW1`

(B) `show cdp`

(C) `show cdp NY-SW1`

(D) `show cdp protocol NY-SW1`

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

219. The frequency at which CDP messages are sent out is known as the _____.

(A) CDP hold timer

(B) CDP stat

(C) CDP interval

(D) CDP timer

220. By default, how frequently does a Cisco device send out CDP advertisements?

(A) 30 seconds

(B) 60 seconds

(C) 120 seconds

(D) 180 seconds

221. You wish to view only the IP addresses of neighboring devices; what command do you use?

(A) `show cdp entry * protocol`

(B) `show cdp neighbors`

(C) `show cdp neighbors detail`

(D) `show cdp`

222. By default, when a Cisco device receives a CDP message, how long does it store the CDP information locally?

(A) 30 seconds

(B) 60 seconds

(C) 120 seconds

(D) 180 seconds

223. You would like to alter the amount of time that CDP information is stored on a Cisco device. What command should you use?

(A) `cdp timer`

(B) `cdp store`

(C) `cdp holdtime`

(D) `cdp retain`

224. What command do you use to disable CDP on the serial interface?

(A) `disable cdp`

(B) `cdp disable`

(C) `no disable cdp`

(D) `no cdp enable`

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

225. You would like to alter the frequency at which CDP sends out advertisements to every 90 seconds. What command would you use?

(A) R1`#cdp timer 90`

(B) R1`(config)#cdp 90`

(C) R1`#cdp 90`

(D) R1`(config)#cdp timer 90`

226. Your manager is concerned that hackers can discover information about the network via CDP and asks you to disable CDP on your router. What command would you use?

(A) `disable cdp`

(B) `no cdp run`

(C) `no cdp enable`

(D) `no disable cdp`

Telnet

227–237 Express the given number in scientific notation.

227. You have telnetted into a switch on the network from your router and now wish to suspend your telnet session. How do you do this?

(A) `suspend`

(B) `pause`

(C) Ctrl-Shift-6, then X

(D) Ctrl-Alt-Del

228. Which of the following IOS commands is used to connect to VTY ports on a Cisco device?

(A) `telnet`

(B) `login`

(C) `cdp`

(D) `connect`

(E) `resume`

229. What port does Telnet use?

(A) TCP 23

(B) UDP 23

(C) TCP 21

(D) UDP 21

(E) TCP 25

(F) TCP 22

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

230. Which of the following secure protocols should be used instead of Telnet for remote administration of the Cisco device?

(A) HTTPS

(B) VPN

(C) IPSEC

(D) SSH

231. What port does SSH use?

(A) TCP 23

(B) UDP 23

(C) TCP 21

(D) UDP 21

(E) TCP 25

(F) TCP 22

232. Which of the following represent characteristics of telnet with Cisco devices? (Select two.)

(A) Traffic is encrypted

(B) Traffic is unencrypted

(C) No longer supported on Cisco devices

(D) Should be used instead of SSH

(E) Requires configuration on the destination device

233. Your network has been up and running for a few months. Two days ago, Bob, the network administrator, assigned an IP address to the switch. Why would an IP address be assigned to the switch?

(A) For remote management

(B) To allow the switch to forward traffic based on layer-3 address

(C) To allow the switch to forward traffic based on layer-2 address

(D) To allow devices connected to the switch to communicate

234. You have suspended a Telnet session and wish to reconnect to that session again; what command do you use?

(A) `reconnect <IP Address>`

(B) `resume <Device ID>`

(C) `reconnect <Device ID>`

(D) `resume <IP Address>`

https://gicovietnam.blogspot.com - Kho tổng hợp tài liệu và chia sẻ

235. What command do you use to determine if you have any suspended Telnet sessions?

(A) `show sessions`

(B) `show users`

(C) `show suspensions`

(D) `show suspended users`

236. Your manager would like you to monitor who is remotely connected to the router via Telnet. What command would you use?

(A) `show sessions`

(B) `show suspensions`

(C) `show users`

(D) `show suspended users`

237. You are having trouble telnetting into one of your Boston switches from the New York office. You have no problem telnetting into the switch when you are in the Boston office. What is most likely the solution?

(A) Enable routing on the switch.

(B) Configure a static route on the router in New York.

(C) Configure a default gateway on the switch.

(D) Configure a default gateway on the New York router.