


Packet Tracer Activity – Week 9

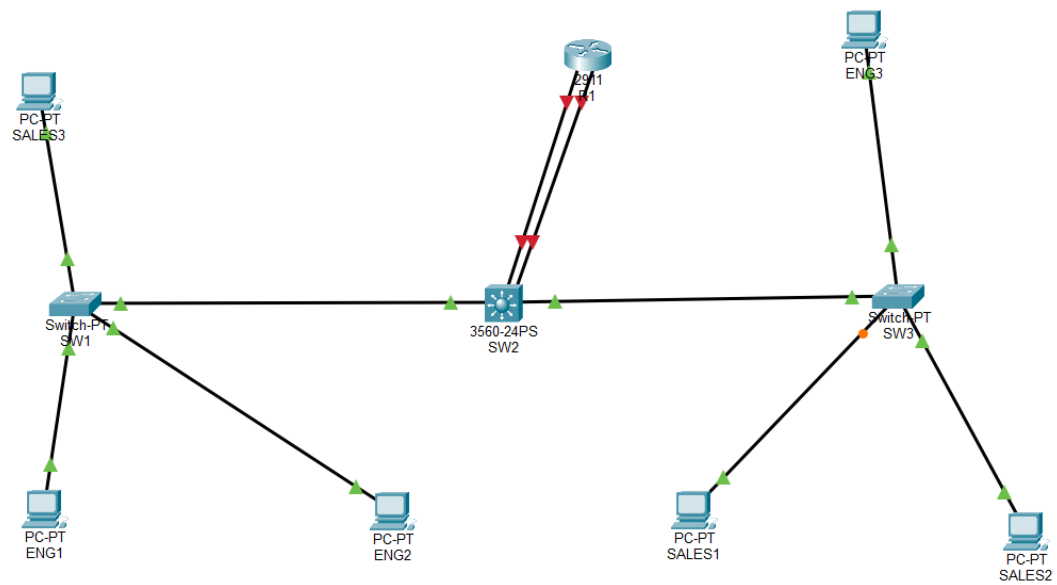

```

Switch>ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp domain CAMPUS
Changing VTP domain name from NULL to CAMPUS
Switch(config)##SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to CAMPUS.

Switch(config)#vtp mode server
Device mode already VTP SERVER.
Switch(config)#vtp password net512
Setting device VLAN database password to net512
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

```

SW2

```

Switch#ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp domain campus
Changing VTP domain name from NULL to campus
Switch(config)##SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to campus.
06:20:41 %DTP-5-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/2 because of VTP domain mismatch.

vtp domain CAMPUS06:21:11 %DTP-5-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/2 because of VTP domain mismatch.

Changing VTP domain name from campus to CAMPUS
Switch(config)##SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to CAMPUS.

Switch(config)#vtp mode client
Setting device to VTP CLIENT mode.
Switch(config)#vtp password net512
Setting device VLAN database password to net512
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

```

SW3

```

Switch>ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vtp domain CAMPUS
Changing VTP domain name from NULL to CAMPUS
Switch(config)##SW_VLAN-6-VTP_DOMAIN_NAME_CHG: VTP domain name changed to CAMPUS.

Switch(config)#vtp mode client
Setting device to VTP CLIENT mode.
Switch(config)#vtp password net512
Setting device VLAN database password to net512
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

```

90.SW1

```

Switch#ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name ENG
Switch(config-vlan)#name SALES
VLAN #20 and #10 have an identical name: SALES
Switch(config-vlan)#interface range FastEthernet0/1-2
interface range not validated - command rejected
Switch(config)#interface FastEthernet0/1-2
^
% Invalid input detected at '^' marker.

Switch(config)#interface FastEthernet2/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#end

```

91.SW1

```

Switch>ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

```

SW3

```

Switch>ena
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface GigabitEthernet0/2
%Invalid interface type and number
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Switch(config-if)#switchport trunk allowed vlan 10,20
Switch(config-if)#end

```

92.VLANS

```
Switch#ena
Switch#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa1/1, Fa2/1, Fa3/1, Fa4/1 Fa5/1
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
Switch#
```

TRUNKS

```
Switch#show interfaces trunk
Port      Mode      Encapsulation  Status        Native vlan
Fa0/1     on        802.1q         trunking      1

Port      Vlans allowed on trunk
Fa0/1     10,20

Port      Vlans allowed and active in management domain
Fa0/1     none

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     none
```

R1

```
Router(config)#
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 10.10.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
Router(config-if)#ip address 10.10.20.1 255.255.255.0
Router(config-if)#no shut down

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

PINGING

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.20.10

Pinging 10.10.20.10 with 32 bytes of data:

Reply from 10.10.20.10: bytes=32 time=125ms TTL=128
Reply from 10.10.20.10: bytes=32 time<1ms TTL=128
Reply from 10.10.20.10: bytes=32 time<1ms TTL=128
Reply from 10.10.20.10: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 125ms, Average = 31ms

C:\>
```

```
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#no ip address
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/1
```

SW3

```
Switch(config)#interface vlan 10
Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan10, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan10, changed state to up
```

```
Switch(config-if)#interface vlan 20
Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan20, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to up
```

IP INTERFACE BRIEF

Vlan10	10.10.20.1	YES manual up	up
Vlan20	10.10.10.1	YES manual up	up
Switch#			

PINGING

```
C:\>ping 10.10.20.10

Pinging 10.10.20.10 with 32 bytes of data:

Reply from 10.10.20.10: bytes=32 time=27ms TTL=128
Reply from 10.10.20.10: bytes=32 time=1ms TTL=128
Reply from 10.10.20.10: bytes=32 time<1ms TTL=128
Reply from 10.10.20.10: bytes=32 time=6ms TTL=128

Ping statistics for 10.10.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 27ms, Average = 8ms

C:\>
```

PINGING

```
C:\>ping 10.10.10.10

Pinging 10.10.10.10 with 32 bytes of data:

Reply from 10.10.10.10: bytes=32 time=12ms TTL=128
Reply from 10.10.10.10: bytes=32 time<1ms TTL=128
Reply from 10.10.10.10: bytes=32 time<1ms TTL=128
Reply from 10.10.10.10: bytes=32 time=3ms TTL=128

Ping statistics for 10.10.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 12ms, Average = 3ms
```

96. Layer Switch 3 is most scalable for a large campus network because it has superior performance and it does not have Bandwidth Bottlenecks, It also provides faster routing between vlans.