


NET512 WEEKLY PRACTICAL

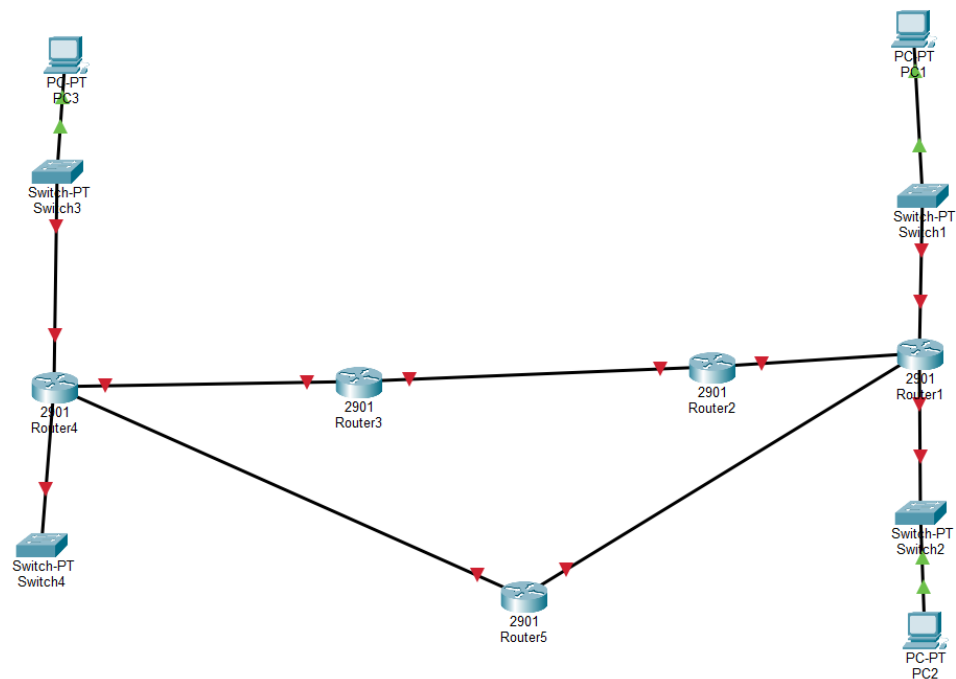

```

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
  
```

```

Tracing route to 10.0.2.10 over a maximum of 30 hops:
  
```

```

  1  *         *         *         Request timed out.
  2  *         *         *         Request timed out.
  3  *         *         *         Request timed out.
  4  *         *         *         Request timed out.
  5  *         *         *         Request timed out.
  
```

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.1.2.10
  
```

```

Pinging 10.1.2.10 with 32 bytes of data:
  
```

```

Request timed out.
Request timed out.
Request timed out.
Request timed out.
  
```

```

Ping statistics for 10.1.2.10:
  
```

```

    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
  
```



```

R1(config)#ip route 10.1.0.0 255.255.252.0 10.0.0.2
R1(config)#show ip route
      ^
% Invalid input detected at '^' marker.
R1(config)#show ip route
      ^

```

```

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 10.1.2.10

Pinging 10.1.2.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.1.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>

```

```

R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

```

All results were unsuccessful.

71. yes, Cisco routers automatically add a local route for the specific interface Ip address to the routing table as soon as interface becomes active.

72. Because routing requires end-to-end knowledge at every hop along the path.

73. Because subnet boundaries can be aggregated (summarized) if they share contiguous binary prefixes.