




WEEK 3 PRAC

Lerato Modise



Topology Screenshot

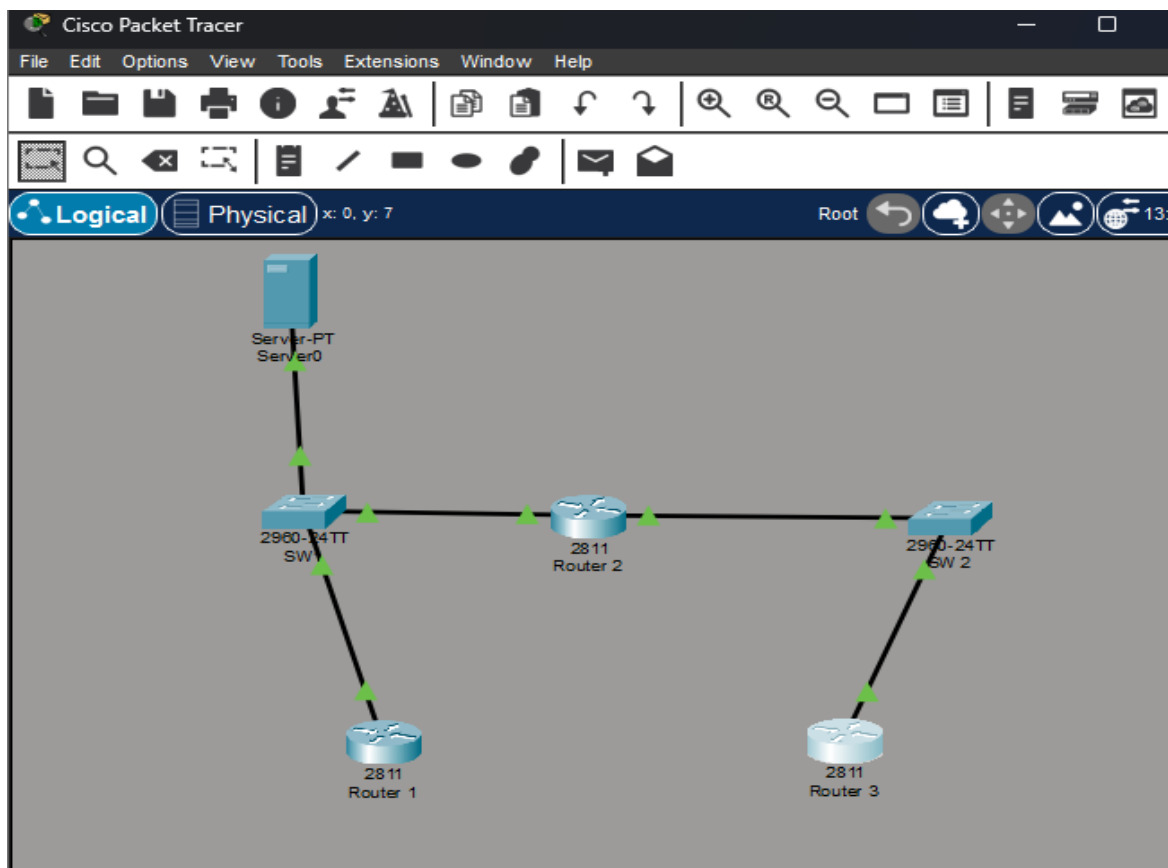

Router 1

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip domain-lookup
Router(config)#ip name-server 10.10.10.10
Router(config)#ip domain-name lab.local
Router(config)#end
```

Router 2

```
Router(config-if)#
Router(config-if)#ip domain-lookup
Router(config)#ip name-server 10.10.10.10
Router(config)#ip domain-name lab.local
Router(config)#end
Router#
```

Router 3

```
Router(config)#ip domain-lookup
Router(config)#ip name-server 10.10.10.10
Router(config)#ip domain-name lab.local
Router(config)#end
Router#
```

17 Ping

R1

```
Router#ping 10.10.20.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.20.1, timeout is 2 seconds:
.....
Success rate is 60 percent (3/5), round-trip min/avg/max = 1/1/3 ms

Router#
```

R3

```
Router#ping 10.10.10.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/1/7 ms
```

18 Clear arp-cache

R1

```
Router#clear arp-cache
Router#show arp


| Protocol | Address    | Age (min) | Hardware Addr  | Type | Interface       |
|----------|------------|-----------|----------------|------|-----------------|
| Internet | 10.10.10.1 | -         | 0050.0F76.8101 | ARPA | FastEthernet0/0 |
| Internet | 10.10.10.2 | 0         | 0001.97A8.6401 | ARPA | FastEthernet0/0 |


Router#ping 10.10.10.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/2/11 ms
```

19 show arp-cache

R1

```
Router#show arp


| Protocol | Address    | Age (min) | Hardware Addr  | Type | Interface       |
|----------|------------|-----------|----------------|------|-----------------|
| Internet | 10.10.10.1 | -         | 0050.0F76.8101 | ARPA | FastEthernet0/0 |
| Internet | 10.10.10.2 | 2         | 0001.97A8.6401 | ARPA | FastEthernet0/0 |


Router#
```

R2

```

Router>enable
Router#show arp

```

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.10.10.1	8	0050.0F76.8101	ARPA	FastEthernet0/0
Internet	10.10.10.2	-	0001.97A8.6401	ARPA	FastEthernet0/0
Internet	10.10.20.1	8	0002.4A8E.7701	ARPA	FastEthernet0/1
Internet	10.10.20.2	-	0001.97A8.6402	ARPA	FastEthernet0/1

```

Router#

```

R3

```

Router#show arp

```

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.10.20.1	-	0002.4A8E.7701	ARPA	FastEthernet0/0
Internet	10.10.20.2	9	0001.97A8.6402	ARPA	FastEthernet0/0

```

Router#

```

20. A routing table entry only tells you the next hop ip address and which interface to send the packet out.

21. The IP routing and Ethernet delivery are 2 different jobs.