


Practical week 10

Topology

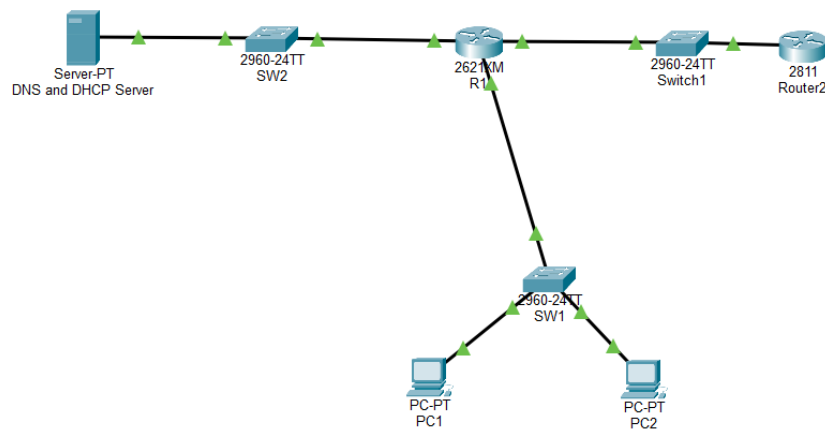

Task 97


```
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# ip dhcp excluded-address 10.10.20.1 10.10.20.5
Router(config)#ip dhcp pool NET-POOL
Router(dhcp-config)#network 10.10.20.0 255.255.255.0
Router(dhcp-config)#default-router 10.10.20.10
Router(dhcp-config)#dns-server 8.8.8.8 8.8.4.4
^
% Invalid input detected at '^' marker.

Router(dhcp-config)#dns-server 8.8.8.8
Router(dhcp-config)#exit
Router(config)# interface fa0/0
Router(config-if)#ip address 10.10.20.10 255.255.255.0
```

```
R1(config)#interface fa0/0
R1(config-if)#ip address dhcp
```

Task 98


```
R1(config)#ip dhcp excluded-address 10.10.20.1 10.10.20.5
R1(config)#ip dhcp pool NET-POOL
R1(dhcp-config)#network 10.10.20.0 255.255.255.0
R1(dhcp-config)#default-router 10.10.20.10
R1(dhcp-config)# dns-server 8.8.8.8
```

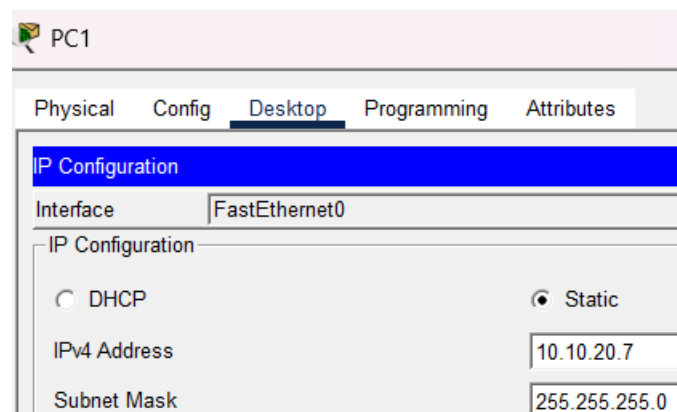

Task 99

```
R1(config)#no ip dhcp pool NET-POOL
```

```
R1(config)#interface fa0/1  
R1(config-if)#ip address 10.10.10.1 255.255.255.0  
R1(config-if)#ip helper-address 10.10.20.10  
R1(config-if)#exit
```

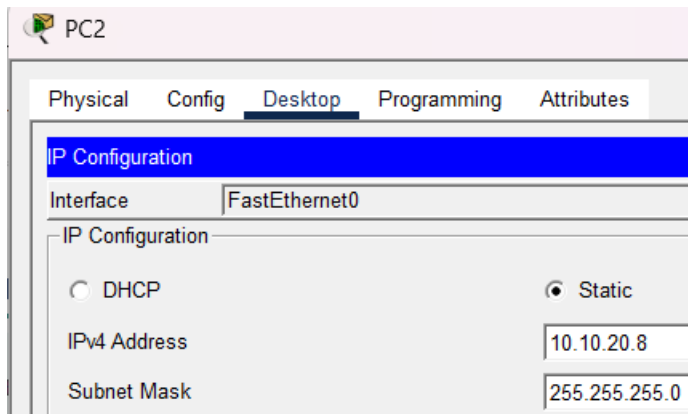

Task 100

It is used as backup in case if the DHCP request fails when the server is on a different subnet.