


Mpho Edward Makata

20261829

Week 2 Practical

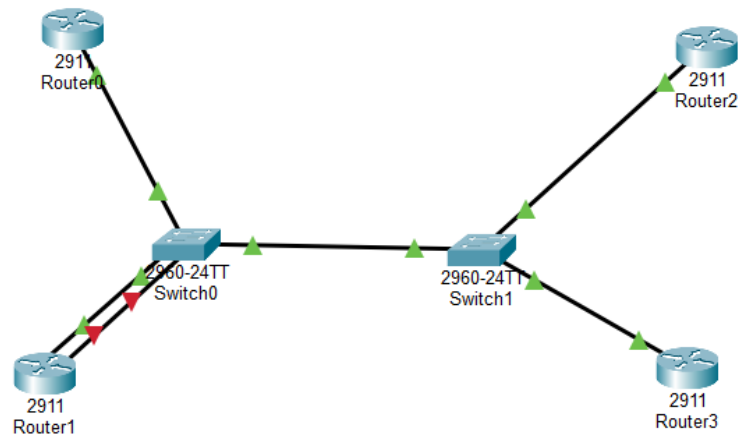

```
Switch#
Switch# show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type    Ports
----    -
1       0000.0c4d.3201    DYNAMIC Fa0/2
1       0090.21b4.9d18    DYNAMIC Fa0/24
1       00e0.8f4d.8001    DYNAMIC Fa0/1
Switch#
Switch#
Switch# show mac address-tables
      ^
```

```
Router# ping 192.168.1.18

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.18, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/7/27 ms

Router#
```

Question 9

```
Switch>
Switch>
Switch>en
Switch# clear mac address-table dynamic
Switch# show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0090.21b4.9d18   DYNAMIC   Fa0/24
Switch#
```

```
Router>
Router>en
Router# show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/0
L       192.168.1.16/32 is directly connected, GigabitEthernet0/0

Router#
```

```
Router>
Router>en
Router# show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/0
L       192.168.1.17/32 is directly connected, GigabitEthernet0/0

Router#
```

```

Router>
Router>en
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/1
L       192.168.1.15/32 is directly connected, GigabitEthernet0/1
Router#

```

```

Router>
Router>en
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/0
L       192.168.1.18/32 is directly connected, GigabitEthernet0/0
Router#

```

Router A

IP Configuration	
IPv4 Address	192.168.1.15
Subnet Mask	255.255.255.0

Router B

MAC Address		0000.0C4D.3201
IP Configuration		
IPv4 Address	192.168.1.16	
Subnet Mask	255.255.255.0	

Router C

IP Configuration	
IPv4 Address	192.168.1.17
Subnet Mask	255.255.255.0

Route D

IP Configuration

IPv4 Address

192.168.1.18

Subnet Mask

255.255.255.0

Question 11

```
Router#
Router#
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0/0
%Invalid interface type and number
Router(config)# interface GigabitEthernet0/0
Router(config-if)# ip address 192.168.1.16 255.255.255
                                     ^
% Invalid input detected at '^' marker.

Router(config-if)# ip address 192.168.1.16 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
```

```
Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/1
Router(config-if)# ip address 192.168.1.15 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)#
```

```
Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)# ip address 192.168.1.17 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
```

```
Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)# ip address 192.168.1.18 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)#
```

Question 12

```
Router>en
Router# show ip interfaceface brief
      ^
% Invalid input detected at '^' marker.

Router#show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       192.168.1.16    YES manual up              up
GigabitEthernet0/1       unassigned      YES unset  administratively down down
GigabitEthernet0/2       unassigned      YES unset  administratively down down
Vlan1                    unassigned      YES unset  administratively down down
Router#
```

% Invalid input detected at '^' marker.

```
Router# show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       192.168.1.17    YES manual up              up
GigabitEthernet0/1       unassigned      YES unset  administratively down down
GigabitEthernet0/2       unassigned      YES unset  administratively down down
Vlan1                    unassigned      YES unset  administratively down down
Router#
```

```
Router# show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       192.168.1.18    YES manual up              up
GigabitEthernet0/1       unassigned      YES unset  administratively down down
GigabitEthernet0/2       unassigned      YES unset  administratively down down
Vlan1                    unassigned      YES unset  administratively down down
Router#
```

```
Router# show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       unassigned      YES unset  up              up
GigabitEthernet0/1       192.168.1.15    YES manual up              up
GigabitEthernet0/2       unassigned      YES unset  administratively down down
Vlan1                    unassigned      YES unset  administratively down down
Router#
```

Question 15

Yes, it shows the dynamic mac address and the rest are not appearing.