


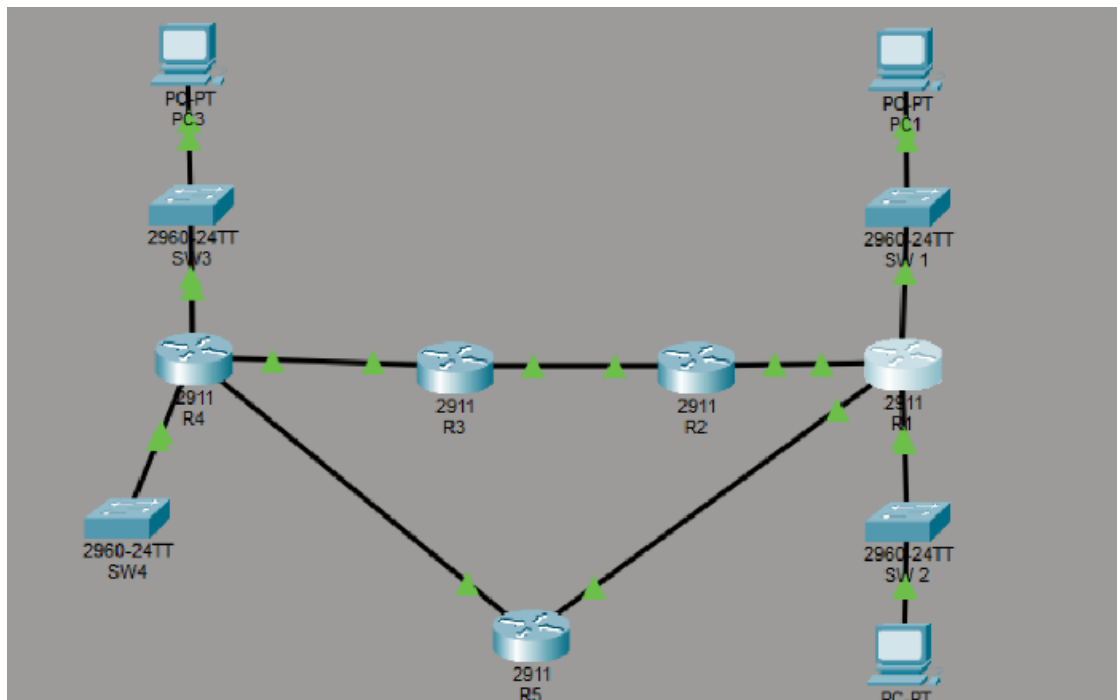

```

Router(config-if)#hostname R1
R1(config)#interface GigabitEthernet0/0
R1(config-if)#ip address 10.0.1.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#
R1(config-if)#interface GigabitEthernet0/1
R1(config-if)#ip address 10.1.0.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.1.0/24 is directly connected, GigabitEthernet0/0
L       10.0.1.1/32 is directly connected, GigabitEthernet0/0
C       10.1.0.0/24 is directly connected, GigabitEthernet0/1
L       10.1.0.1/32 is directly connected, GigabitEthernet0/1

```

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.2.10

Pinging 10.0.2.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.0.2.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>tracert 10.0.2.10

Tracing route to 10.0.2.10 over a maximum of 30 hops:

  0  *          *          *          Request timed out.
  1  *          *          *          Request timed out.
  2  *          *          *          Request timed out.
  3  *          *          *          Request timed out.
  4  *          *          *          Request timed out.
  5  *          *          *          Request timed out.
  6  *          *          *          Request timed out.

```

```

R1>enable
R1#config terminal
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#ip route 10.0.2.0 255.255.255.0 10.0.1.2
R1(config)#ip route 10.1.2.0 255.255.255.0 10.1.0.2
R1(config)#
R1(config)#no ip route 10.1.2.0 255.255.255.0 10.1.0.2
R1(config)#ip route 10.0.0.0 255.255.0.0 10.0.1.2
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 6 subnets, 3 masks
S       10.0.0.0/16 [1/0] via 10.0.1.2
C       10.0.1.0/24 is directly connected, GigabitEthernet0/0
L       10.0.1.1/32 is directly connected, GigabitEthernet0/0
S       10.0.2.0/24 [1/0] via 10.0.1.2
C       10.1.0.0/24 is directly connected, GigabitEthernet0/1
L       10.1.0.1/32 is directly connected, GigabitEthernet0/1

```

```
Ping statistics for 10.0.2.10:
  Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>ping 10.1.2.10
```

```
Pinging 10.1.2.10 with 32 bytes of data:
```

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.
```

```
Ping statistics for 10.1.2.10:
  Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>
```

```
C:\>ping 203.0.113.2
```

```
Pinging 203.0.113.2 with 32 bytes of data:
```

```
Request timed out.
Request timed out.
Request timed out.
Request timed out.
```

```
Ping statistics for 203.0.113.2:
  Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>tracert 203.0.113.2
```

```
Tracing route to 203.0.113.2 over a maximum of 30 hops:
```

1	*	*	*	Request timed out.
2	*	*	*	Request timed out.
3	*	*	*	Request timed out.
4	*	*	*	Request timed out.
5	*			

```
R1#show ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route
```

```
Gateway of last resort is not set
```

```
10.0.0.0/8 is variably subnetted, 6 subnets, 3 masks
S    10.0.0.0/16 [1/0] via 10.0.1.2
C    10.0.1.0/24 is directly connected, GigabitEthernet0/0
L    10.0.1.1/32 is directly connected, GigabitEthernet0/0
S    10.0.2.0/24 [1/0] via 10.0.1.2
C    10.1.0.0/24 is directly connected, GigabitEthernet0/1
L    10.1.0.1/32 is directly connected, GigabitEthernet0/1
```

```
R1#config terminal
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
R1(config)#int fa0/0
```

```
%Invalid interface type and number
```

```
R1(config)#GigabitEthernet0/0
```

```
% Invalid input detected at '^' marker.
```

```
R1(config)#ip route 203.0.113.0 255.255.255.0 10.0.3.2
```

```
R1(config)#
```

```
R1(config)#ip route 0.0.0.0 0.0.0.0 10.0.1.2
```

```
R1(config)#ip route 0.0.0.0 0.0.0.0 10.0.1.2
```

```
R1(config)#ip route 0.0.0.0 0.0.0.0 10.0.3.2
```