


Week 2: Cisco Device Functions (5 Marks)

Refiloe Seselinyane

06 August 2026

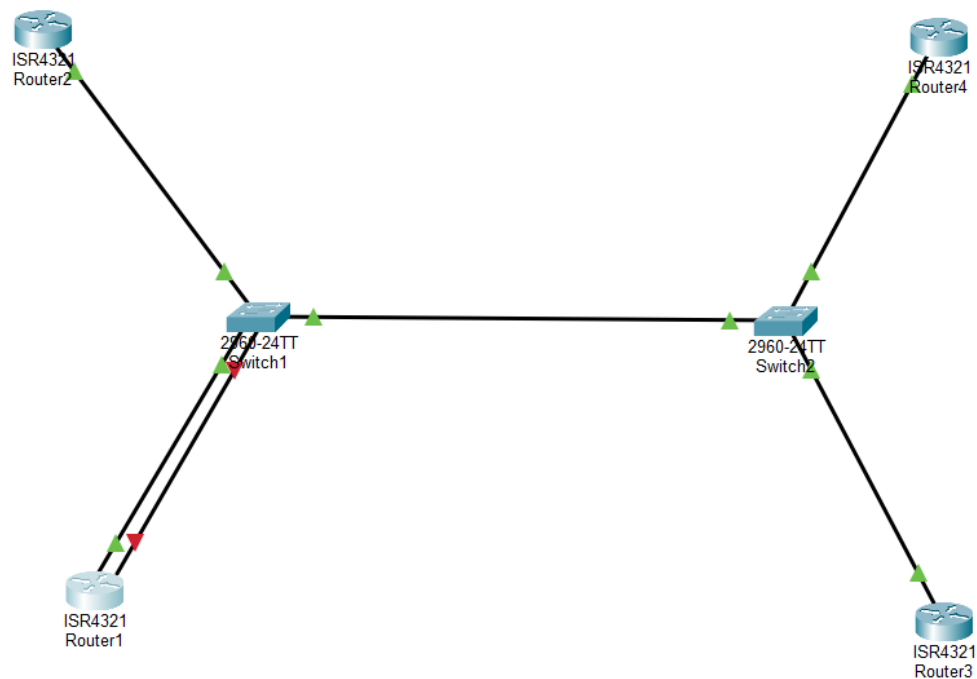

5:

```
Switch>enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       00d0.bab6.c501    DYNAMIC   Fa0/1
1       00d0.bcec.1001    DYNAMIC   Fa0/2
1       00d0.d317.1a18    DYNAMIC   Fa0/24
Switch#
```

```
Switch>enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0001.63d3.d902    DYNAMIC   Fa0/3
1       0030.a32c.2e01    DYNAMIC   Fa0/4
1       00e0.8fe3.0b18    DYNAMIC   Fa0/24
Switch#
```

6:

Router1

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/0

Port Status

☒ On

Link Speed

1000 Mbps

☒ 100 Mbps

☐ 10 Mbps

☒ Auto

Duplex

Half Duplex

☒ Full Duplex

☒ Auto

MAC Address00D0.BAB6.C501

IP Configuration

IPv4 Address192.168.1.10

Subnet Mask255.255.255.0

Tx Ring Limit10

Router2

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/0

Port Status

☒ On

Link Speed

1000 Mbps

☒ 100 Mbps

☐ 10 Mbps

☒ Auto

Duplex

Half Duplex

☒ Full Duplex

☒ Auto

MAC Address00D0.BCEC.1001

IP Configuration

IPv4 Address192.168.1.11

Subnet Mask255.255.255.0

Tx Ring Limit10

Router3

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/0

Port Status

☒ On

Link Speed

1000 Mbps

☒ 100 Mbps

☐ 10 Mbps

☒ Auto

Duplex

Half Duplex

☐ Full Duplex

☒ Auto

MAC Address0001.63D3.D901

IP Configuration

IPv4 Address192.168.2.10

Subnet Mask255.255.255.0

Tx Ring Limit10

Router4

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

GigabitEthernet0/0/0

GigabitEthernet0/0/1

GigabitEthernet0/0/0

Port Status

☒ On

Link Speed

1000 Mbps

☒ 100 Mbps

☐ 10 Mbps

☒ Auto

Duplex

Half Duplex

☒ Full Duplex

☒ Auto

MAC Address0030.A32C.2E01

IP Configuration

IPv4 Address192.168.2.11

Subnet Mask255.255.255.0

Tx Ring Limit10

7)

```
Router>enable
Router#ping 192.168.1.11

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.11, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/1 ms

Router#
```

```
Router>enable
Router#ping 192.168.1.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.10, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms

Router#
```

```
Router>enable
Router#ping 192.168.2.11

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.11, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#ping 192.168.2.11

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.11, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
```

```
Router>enable
Router#ping 192.168.2.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
```

8)

```
Switch>enable
Switch#show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       0001.63d3.d902    DYNAMIC   Fa0/3
1       0030.a32c.2e01    DYNAMIC   Fa0/4
1       00e0.8fe3.0b18    DYNAMIC   Fa0/24
Switch#
```

10)

```
Router>enable
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/0/0
L       192.168.1.10/32 is directly connected, GigabitEthernet0/0/0
Router#
```

11)

```
Router(config)#interface GigabitEthernet0/0/0
Router(config-if)#ip address 192.168.2.11 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
|
```

12)