



Screenshot 1 Topology

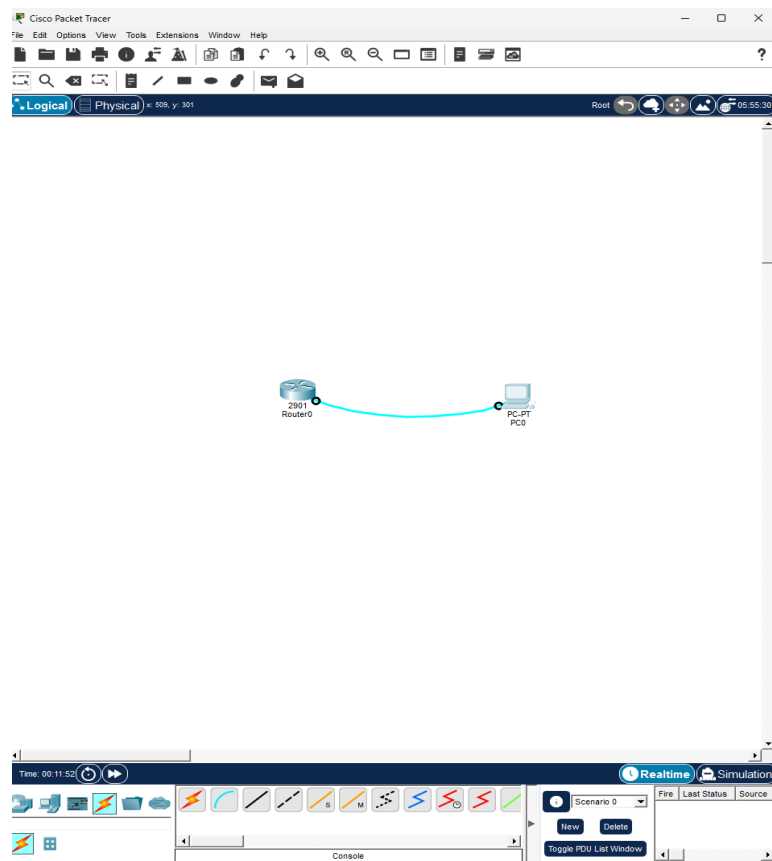

Screenshot 2 User EXEC mode

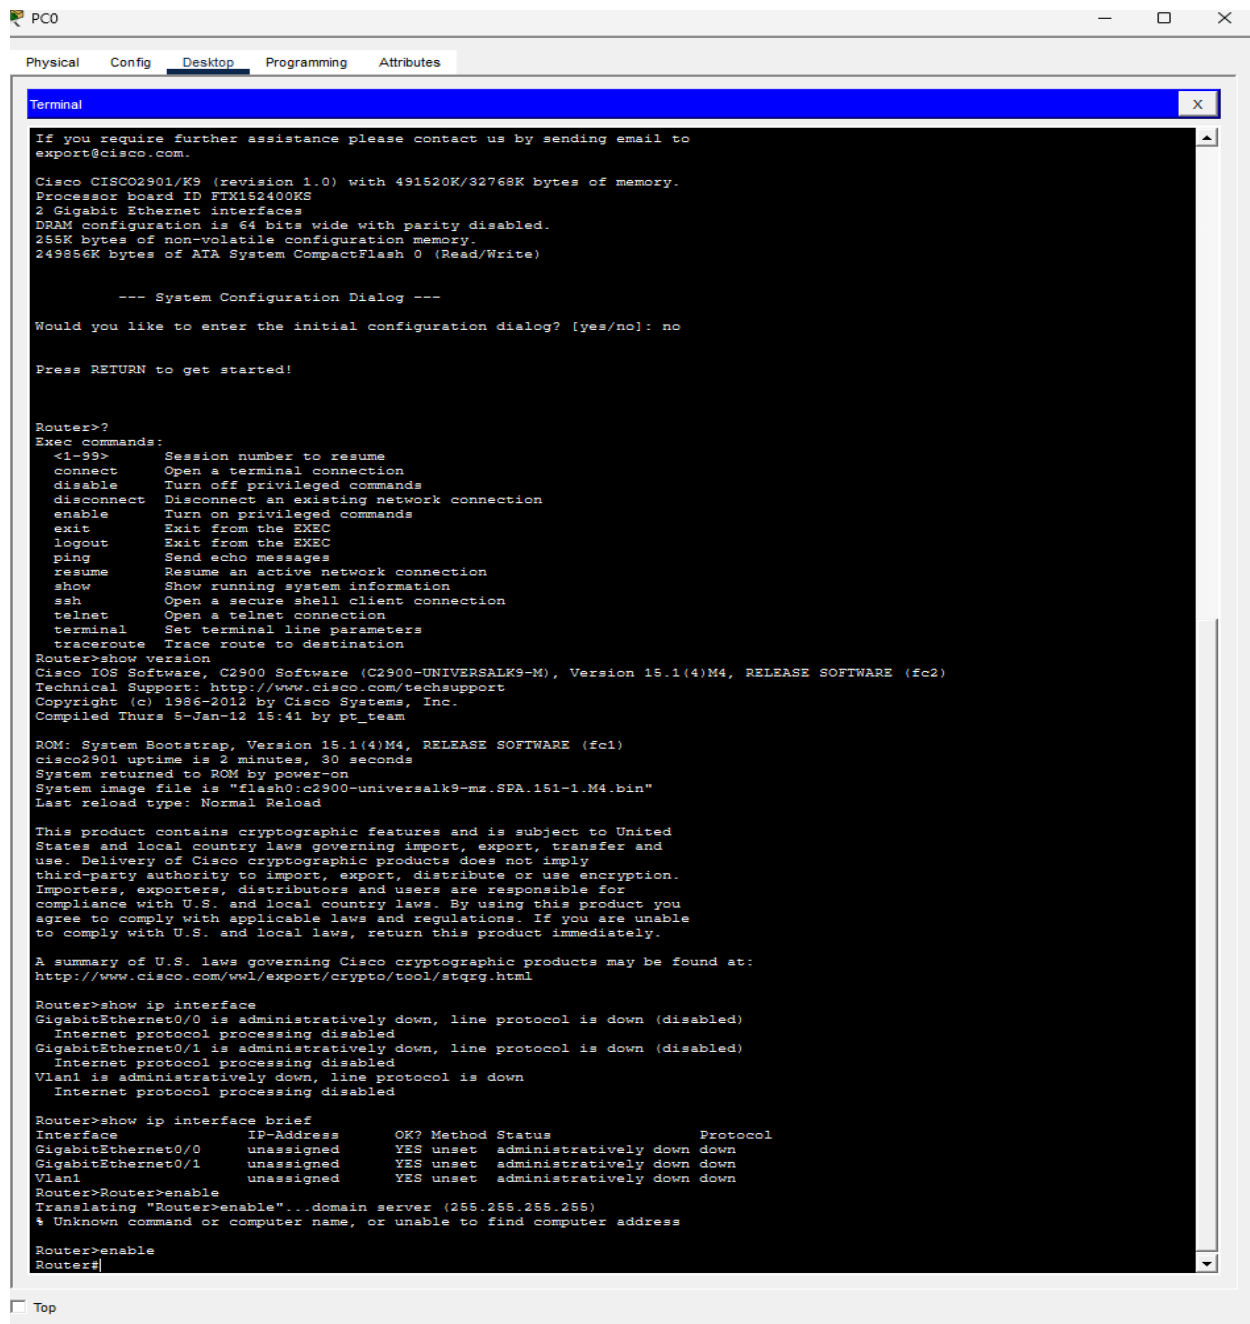

Screenshot 3 Privileged mode



Screenshot 4 Global Configuration mode

PCO

Physical Config Desktop Programming Attributes

Terminal

```
show      Show running system information
ssh       Open a secure shell client connection
telnet    Open a telnet connection
terminal  Set terminal line parameters
traceroute Trace route to destination

Router>show version
Cisco IOS Software, C2900 Software (C2900-UNIVERSALK9-M), Version 15.1(4)M4, RELEASE SOFTWARE (fc2)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2012 by Cisco Systems, Inc.
Compiled Thurs 5-Jan-12 16:41 by pt_team

ROM: System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
cisco2901 uptime is 2 minutes, 30 seconds
System returned to ROM by power-on
System image file is "flash0:c2900-universalk9-mz.SPA.151-1.M4.bin"
Last reload type: Normal Reload

This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

Router>show ip interface
GigabitEthernet0/0 is administratively down, line protocol is down (disabled)
 Internet protocol processing disabled
GigabitEthernet0/1 is administratively down, line protocol is down (disabled)
 Internet protocol processing disabled
Vlan1 is administratively down, line protocol is down
 Internet protocol processing disabled

Router>show ip interface brief
Interface      IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0  unassigned     YES unset  administratively down down
GigabitEthernet0/1  unassigned     YES unset  administratively down down
Vlan1           unassigned     YES unset  administratively down down

Router>Router>enable
Translating "Router>enable"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Router>enable
Router#Router#?
% Unrecognized command
Router#Router#configure terminal
^
% Invalid input detected at '^' marker.

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#?
Configure commands:
aaa             Authentication, Authorization and Accounting.
access-list     Add an access list entry
banner          Define a login banner
bba-group       Configure BBA Group
boot            Modify system boot parameters
cdp             Global CDP configuration subcommands
class-map       Configure Class Map
clock           Configure time-of-day clock
config-register Define the configuration register
crypto          Encryption module
default         Set a command to its defaults
do              To run exec commands in config mode
dot11           IEEE 802.11 config commands
enable          Modify enable password parameters
end             Exit from configure mode
exit            Exit from configure mode
flow            Global Flow configuration subcommands
hostname        Set system's network name
interface       Select an interface to configure
ip              Global IP configuration subcommands
ipv6            Global IPv6 configuration commands
--More--
```

Top