


Week 6: Cisco Device Management

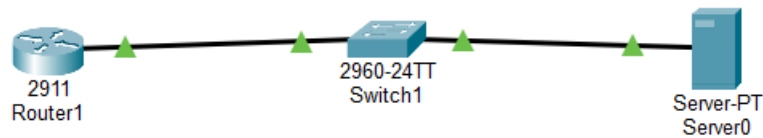

Task 48

```
Writing running-config.....
%Error opening tftp://10.10.10.10/R1-running-config.cfg (Timed out)
Router#show flash:

System flash directory:
File Length Name/status
  3 33591768 c2900-universalk9-mz.SPA.151-4.M4.bin
  2 28282 sigdef-category.xml
  1 227537 sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)

Router#copy flash: tftp:
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]?

Writing c2900-universalk9-mz.SPA.151-4.M4.bin.....
%Error opening tftp://10.10.10.10/c2900-universalk9-mz.SPA.151-4.M4.bin (Timed out)
Router#erase startup-config
Erasing the nvram filesystem will remove all configuration files! Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
Router#reload
Translating "reload"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Router# reload
Translating "reload"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address
```

The backup running configuration to a TFTP server (or equivalent), and backup of the IOS image to TFTP server.

Task 50

```
Router#copy tftp: startup-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1-running-config.cfg
Destination filename [startup-config]?

Accessing tftp://10.10.10.10/R1-running-config.cfg.....

Accessing tftp://10.10.10.10/R1-running-config.cfg.....
%Error opening tftp://10.10.10.10/R1-running-config.cfg (Timed out)
Router# reload
System configuration has been modified. Save? [yes/no]:
% Please answer 'yes' or 'no'.
System configuration has been modified. Save? [yes/no]:yes
Building configuration...
[OK]
Proceed with reload? [confirm]
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by Cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled

Readonly ROMMON initialized
```

A factory reset on the assigned device and confirmed it boots with no saved configuration.

Task 51

```
program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340

IOS Image Load Test

Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
##### [OK]
Smart Init is enabled
smart init is sizing iomem
      TYPE      MEMORY_REQ
Onboard devices &
  buffer pools    0x022F6000
-----
TOTAL:          0x022F6000
Rounded IOMEM up to: 36Mb.
Using 6 percent iomem. [36Mb/512Mb]

Router>enable
Router# copy tftp: flash:
Address or name of remote host []? 10.10.10.10
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]?
%Warning:There is a file already existing with this name
Do you want to over write? [confirm]

Accessing tftp://10.10.10.10/c2900-universalk9-mz.SPA.151-4.M4.bin.....
%Error opening tftp://10.10.10.10/c2900-universalk9-mz.SPA.151-4.M4.bin (Timed out)
Router#
```

The configuration and IOS is restored and the device matches the original.