


Ryno Badenhorst Week 6 PRAC

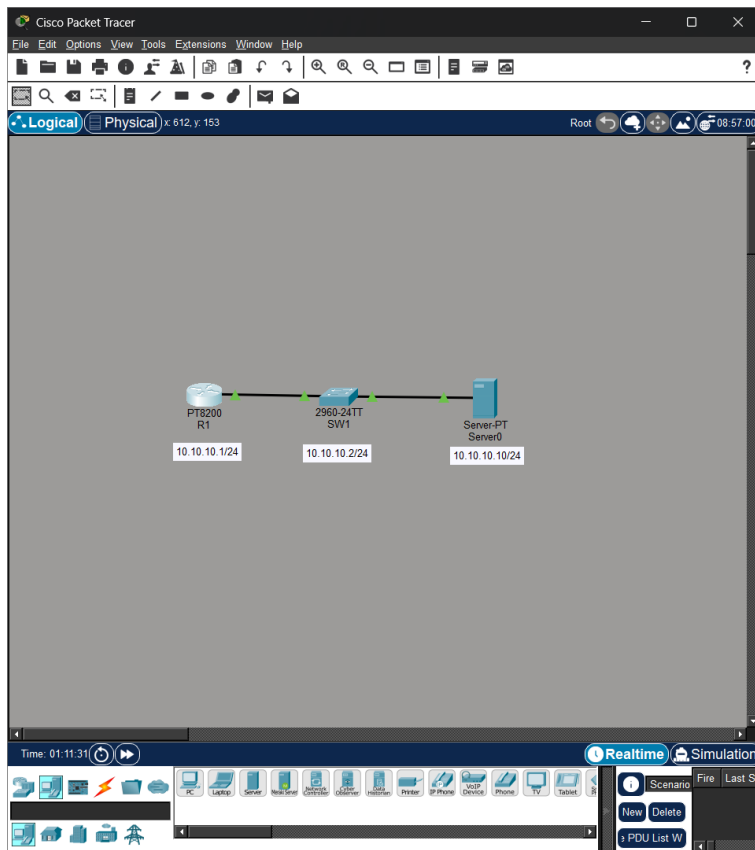

SW1


Physical Config **CLI** Attributes

```
SW1> enable
SW1# copy running-config tftp:
Address or name of remote host []? Server0
Destination filename [SW1-config]? yes

Writing running-config...Translating "Server0"...
%Error opening tftp://Server0/yes (Cannot resolve domain name)
SW1# erase startup-config
Erasing the nvram filesystem will remove all configuration files!
Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
SW1# reload
System configuration has been modified. Save? [yes/no]:yes
Building configuration...
[OK]
Proceed with reload? [confirm]
C2960 Boot Loader (C2960-HBOOT-M) Version 12.2(25r)FX, RELEASE SOFTWARE
(fc4)
Cisco WS-C2960-24TT (RC32300) processor (revision C0) with 21039K bytes
of memory.
2960-24TT starting...
Base ethernet MAC Address: 00E0.A3DD.AAC5
Xmodem file system is available.
Initializing Flash...
flashfs[0]: 2 files, 0 directories
flashfs[0]: 0 orphaned files, 0 orphaned directories
```

Copy Paste

Top

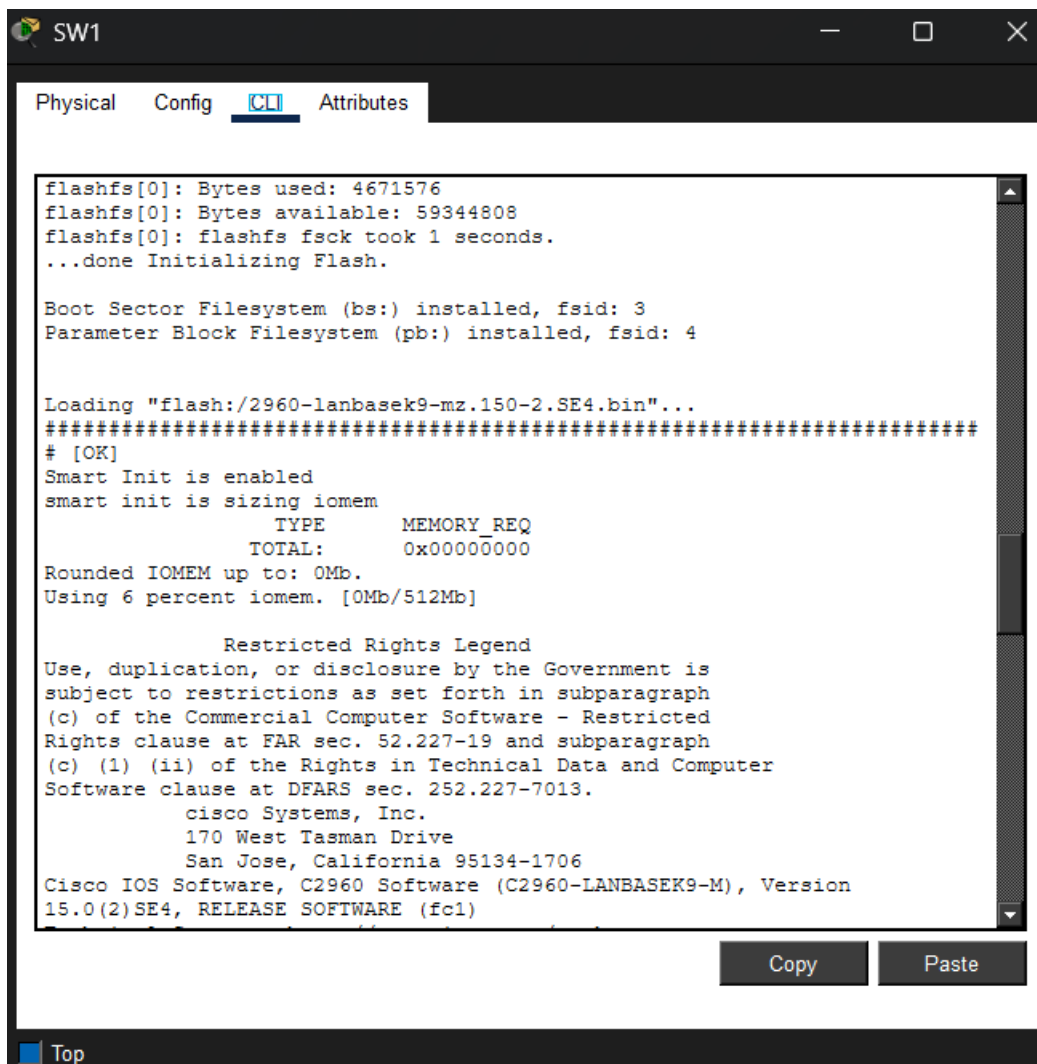

 SW1

Physical Config CLI Attributes

```
San Jose, California 95134-1706
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version
15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnguyen
Initializing flashfs...
fsck: Disable shadow buffering due to heap fragmentation.
flashfs[2]: 2 files, 1 directories
flashfs[2]: 0 orphaned files, 0 orphaned directories
flashfs[2]: Total bytes: 32514048
flashfs[2]: Bytes used: 11952128
flashfs[2]: Bytes available: 20561920
flashfs[2]: flashfs fsck took 2 seconds.
flashfs[2]: Initialization complete....done Initializing flashfs.
Checking for Bootloader upgrade..
Boot Loader upgrade not required (Stage 2)
POST: CPU MIC register Tests : Begin
POST: CPU MIC register Tests : End, Status Passed
POST: PortASIC Memory Tests : Begin
POST: PortASIC Memory Tests : End, Status Passed
POST: CPU MIC interface Loopback Tests : Begin
POST: CPU MIC interface Loopback Tests : End, Status Passed
POST: PortASIC RingLoopback Tests : Begin
POST: PortASIC RingLoopback Tests : End, Status Passed
POST: PortASIC CAM Subsystem Tests : Begin
POST: PortASIC CAM Subsystem Tests : End, Status Passed
POST: PortASIC Port Loopback Tests : Begin
POST: PortASIC Port Loopback Tests : End, Status Passed
Waiting for Port download...Complete
```

Copy Paste

Top

SW1

Physical

Config

CLI

Attributes

States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately. A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>
If you require further assistance please contact us by sending email to export@cisco.com.
cisco WS-C2960-24TT-L (PowerPC405) processor (revision B0) with 65536K bytes of memory.
Processor board ID FOC1010X104
Last reset from power-on
1 Virtual Ethernet interface
24 FastEthernet interfaces
2 Gigabit Ethernet interfaces
The password-recovery mechanism is enabled.
64K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address : 00:E0:A3:DD:AA:C5
Motherboard assembly number : 73-10390-03
Power supply part number : 341-0097-02
Motherboard serial number : FOC10093R12
Power supply serial number : AZS1007032H
Model revision number : B0
Motherboard revision number : B0
Model number : WS-C2960-24TT-L
System serial number : FOC1010X104
Top Assembly Part Number : 800-27221-02

Copy

Paste

Top

SW1

PhysicalConfigCLIAttributes

64K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address : 00:E0:A3:DD:AA:C5
Motherboard assembly number : 73-10390-03
Power supply part number : 341-0097-02
Motherboard serial number : FOC10093R12
Power supply serial number : AZS1007032H
Model revision number : B0
Motherboard revision number : B0
Model number : WS-C2960-24TT-L
System serial number : FOC1010X104
Top Assembly Part Number : 800-27221-02
Top Assembly Revision Number : A0
Version ID : V02
CLEI Code Number : COM3L00BRA
Hardware Board Revision Number : 0x01

Switch	Ports	Model	SW Version	SW Image
*	1 26	WS-C2960-24TT-L	15.0(2)SE4	C2960-LANBASEK9-M

Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnnguyen

Press RETURN to get started!

Copy

Paste