

R1

Physical Config CLI Attributes

IOS Command Line Interface

```
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
no


Press RETURN to get started!



Router>enable
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#hostname R1
R1(config)#interface g0/0
R1(config-if)#ip address 10.10.10.1 255.255.255.0
R1(config-if)#no shutdown

R1(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up
exit
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#
R1#show ip interface brief
Interface              IP-Address      OK? Method Status
Protocol
GigabitEthernet0/0     10.10.10.1      YES manual up
up
GigabitEthernet0/1     unassigned      YES unset  administratively
down down
GigabitEthernet0/2     unassigned      YES unset  administratively
down down
Vlan1                  unassigned      YES unset  administratively
down down
R1#
```


SW1
Physical
Config
CLI
Attributes
IOS Command Line Interface
changed state to up
Switch>enable
Switch#config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW1
SW1(config)#interface vlan1
SW1(config-if)#ip address 10.10.10.2 255.255.255.0
SW1(config-if)#no shutdown
SW1(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW1(config-if)#exit
SW1(config)#ip default-gateway 10.10.10.1
SW1(config)#end
SW1#
%SYS-5-CONFIG_I: Configured from console by console
SW1#
SW1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
SW1#
SW1#shop ip interface brief
^
% Invalid input detected at '^' marker.
SW1#enable
SW1#config
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#show ip interface brief
^
% Invalid input detected at '^' marker.
SW1(config)#show ip interface brief
^
% Invalid input detected at '^' marker.
SW1(config)#exit

SW1

Physical Config CLI Attributes

IOS Command Line Interface

```
FastEthernet0/7        unassigned      YES manual down
down
FastEthernet0/8        unassigned      YES manual down
down
FastEthernet0/9        unassigned      YES manual down
down
FastEthernet0/10       unassigned      YES manual down
down
FastEthernet0/11       unassigned      YES manual down
down
FastEthernet0/12       unassigned      YES manual down
down
FastEthernet0/13       unassigned      YES manual down
down
FastEthernet0/14       unassigned      YES manual down
down
FastEthernet0/15       unassigned      YES manual down
down
FastEthernet0/16       unassigned      YES manual down
down
FastEthernet0/17       unassigned      YES manual down
down
FastEthernet0/18       unassigned      YES manual down
down
FastEthernet0/19       unassigned      YES manual down
down
FastEthernet0/20       unassigned      YES manual down
down
FastEthernet0/21       unassigned      YES manual down
down
FastEthernet0/22       unassigned      YES manual down
down
FastEthernet0/23       unassigned      YES manual down
down
FastEthernet0/24       unassigned      YES manual down
down
GigabitEthernet0/1     unassigned      YES manual down
down
GigabitEthernet0/2     unassigned      YES manual down
down
Vlan1                  10.10.10.2      YES manual up
up
SW1#
SW1#
SW1#
SW1#
```

Copy Paste

TFTP ServerServer0

Physical Config Services Desktop Programming Attrib

IP Configuration

IP Configuration

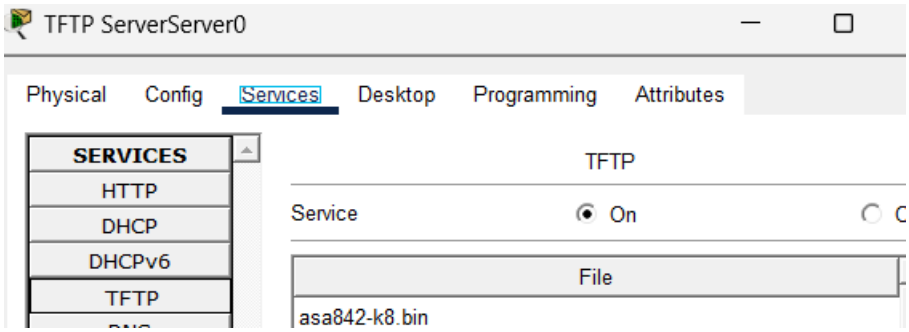
DHCP Static

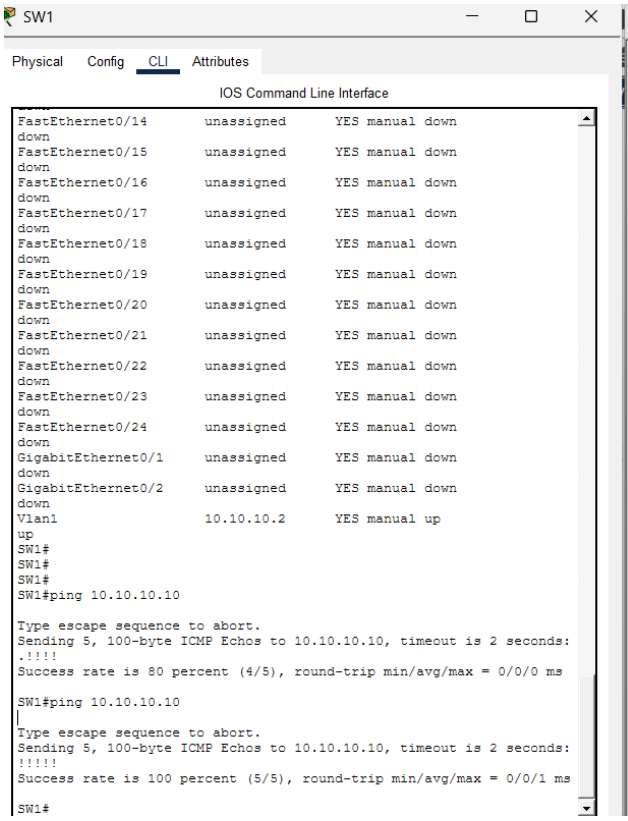
IPv4 Address 10.10.10.10

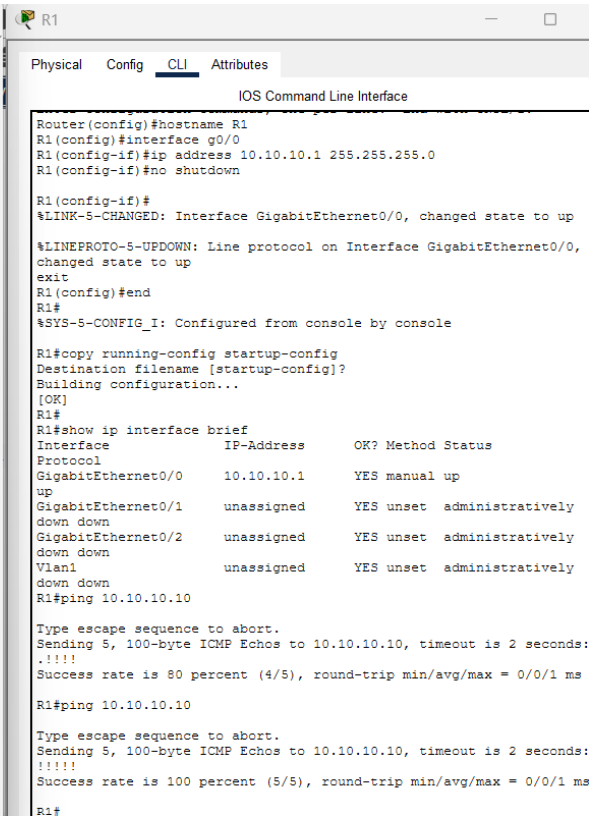
Subnet Mask 255.255.255.0

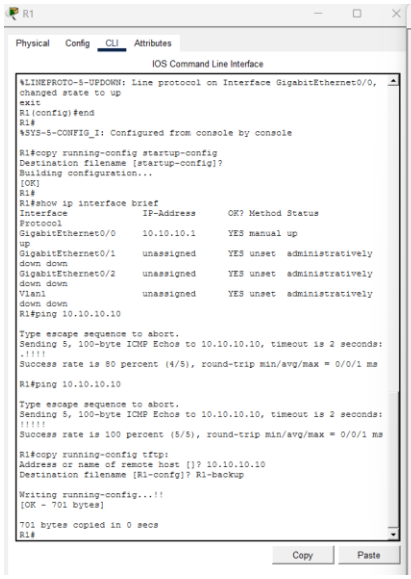
Default Gateway 10.10.10.1

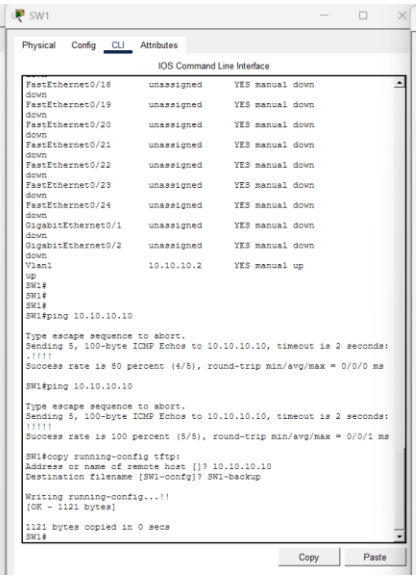
DNS Server 0.0.0.0

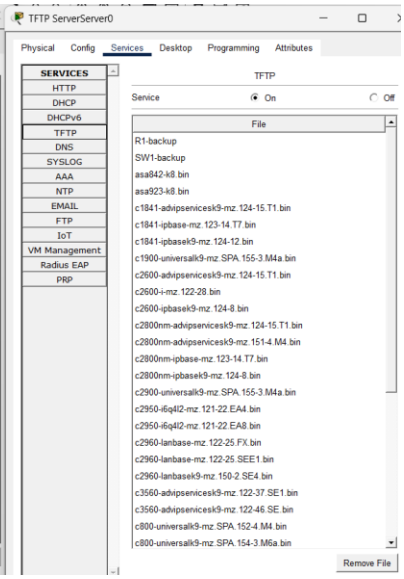

TFTP ServerServer0
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
TFTP
Service
On
File
asa842-k8.bin

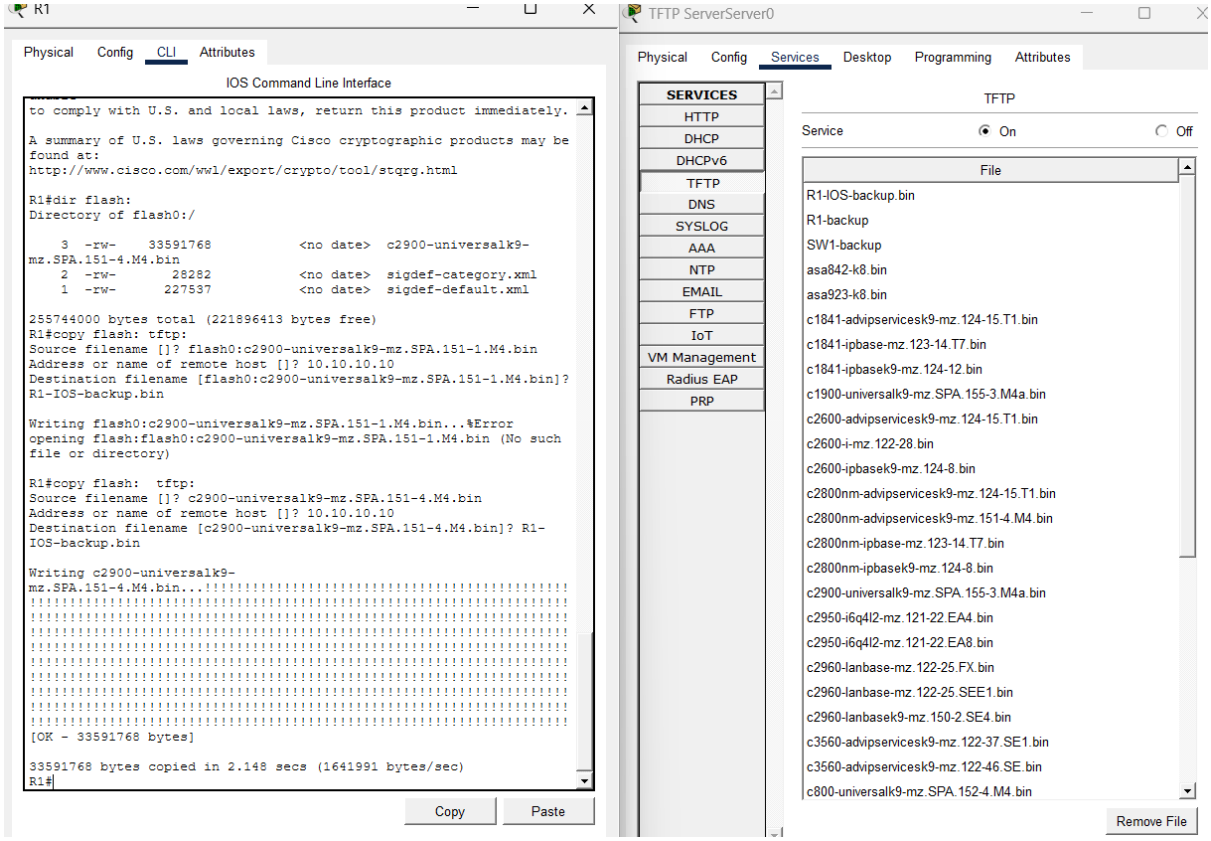

SW1
Physical
Config
CLI
Attributes
IOS Command Line Interface
FastEthernet0/14 unassigned YES manual down
down
FastEthernet0/15 unassigned YES manual down
down
FastEthernet0/16 unassigned YES manual down
down
FastEthernet0/17 unassigned YES manual down
down
FastEthernet0/18 unassigned YES manual down
down
FastEthernet0/19 unassigned YES manual down
down
FastEthernet0/20 unassigned YES manual down
down
FastEthernet0/21 unassigned YES manual down
down
FastEthernet0/22 unassigned YES manual down
down
FastEthernet0/23 unassigned YES manual down
down
FastEthernet0/24 unassigned YES manual down
down
GigabitEthernet0/1 unassigned YES manual down
down
GigabitEthernet0/2 unassigned YES manual down
down
Vlan1 10.10.10.2 YES manual up
up
SW1#
SW1#
SW1#
SW1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/0 ms
SW1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
SW1#

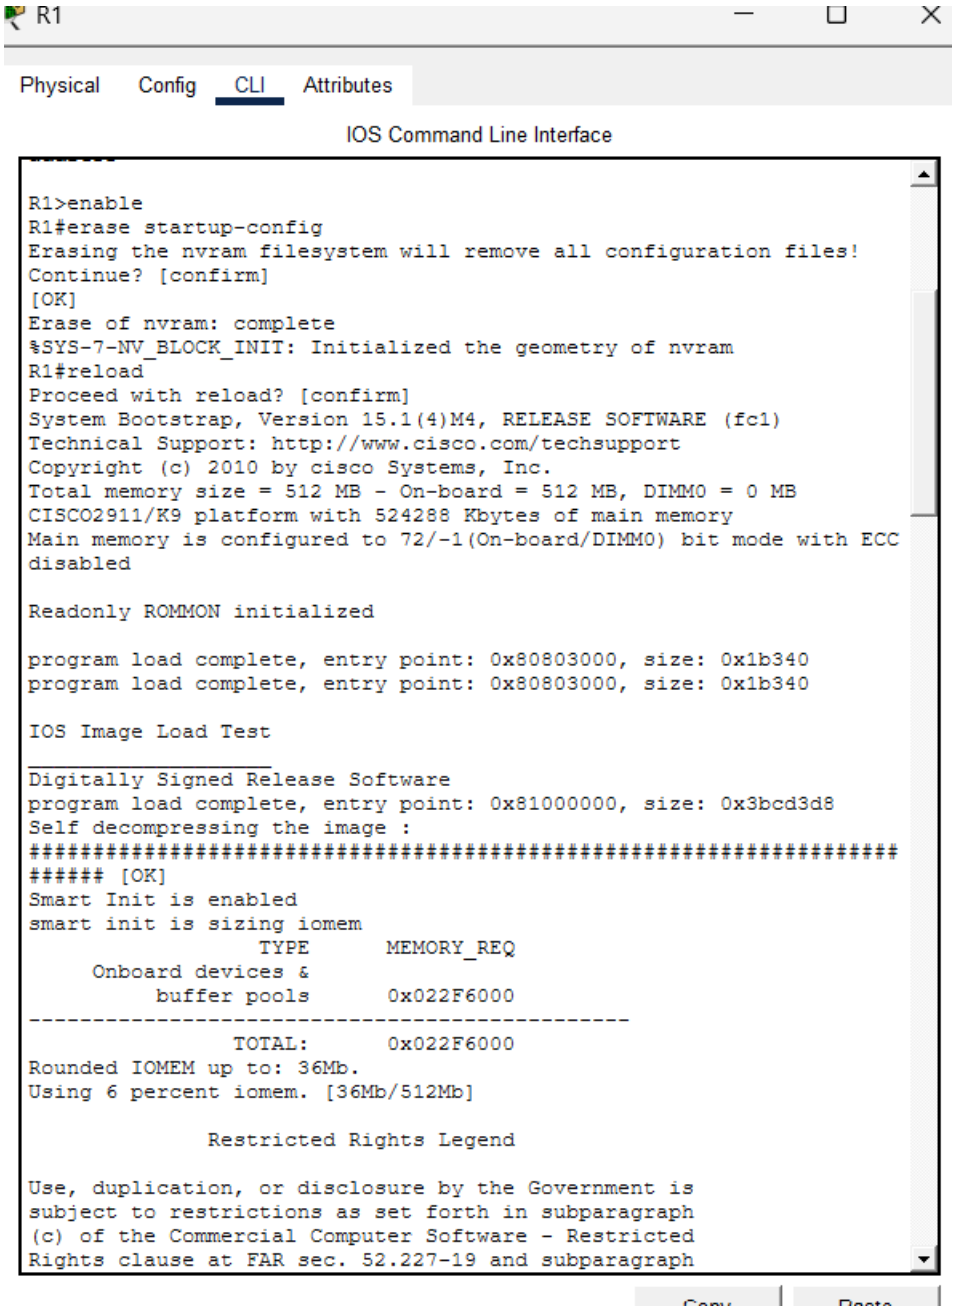

R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router(config)#hostname R1
R1(config)#interface g0/0
R1(config-if)#ip address 10.10.10.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up
exit
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console
R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#
R1#show ip interface brief
Interface IP-Address OK? Method Status
Protocol
GigabitEthernet0/0 10.10.10.1 YES manual up
up
GigabitEthernet0/1 unassigned YES unset administratively
down down
GigabitEthernet0/2 unassigned YES unset administratively
down down
Vlan1 unassigned YES unset administratively
down down
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/1 ms
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
R1#

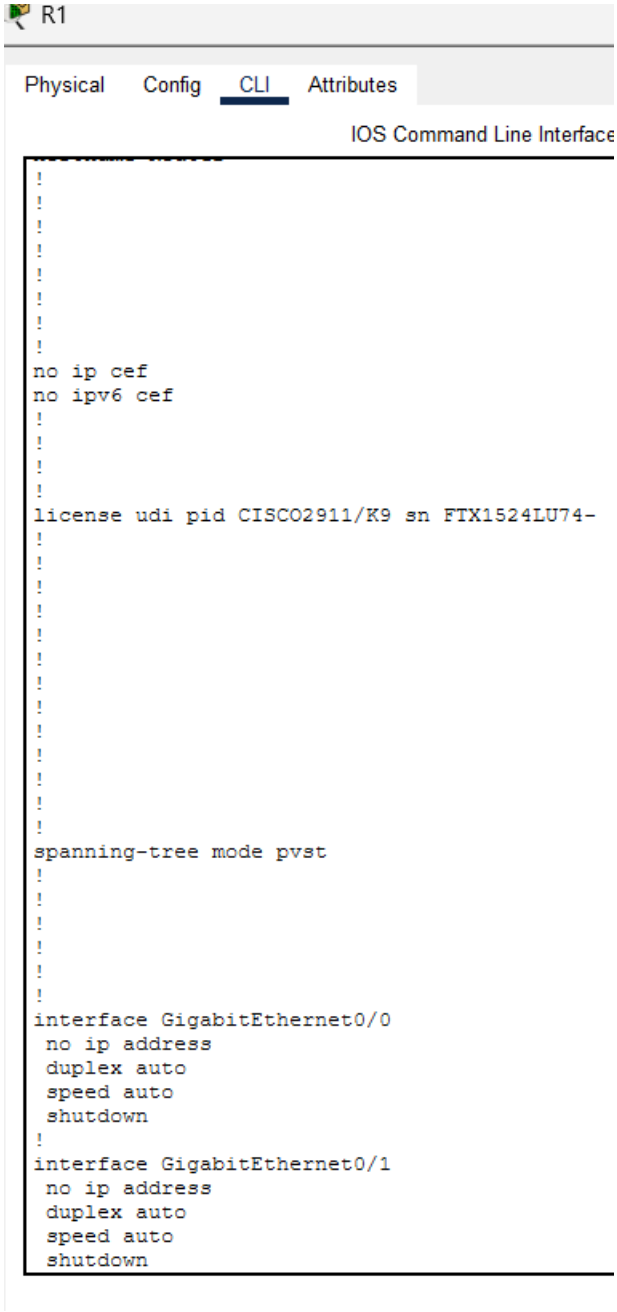

R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up
exit
R1(config)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console
R1#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
R1#
R1#show ip interface brief
Interface IP-Address OK? Method Status
Protocol
GigabitEthernet0/0 10.10.10.1 YES manual up
up
GigabitEthernet0/1 unassigned YES unset administratively
down down
GigabitEthernet0/2 unassigned YES unset administratively
down down
Vlan1 unassigned YES unset administratively
down down
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/1 ms
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
R1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [R1-confg]? R1-backup
Writing running-config...!!
[OK - 701 bytes]
701 bytes copied in 0 secs
R1#
Copy
Paste


SW1
Physical
Config
CLI
Attributes
IOS Command Line Interface
FastEthernet0/18 unassigned YES manual down
down
FastEthernet0/19 unassigned YES manual down
down
FastEthernet0/20 unassigned YES manual down
down
FastEthernet0/21 unassigned YES manual down
down
FastEthernet0/22 unassigned YES manual down
down
FastEthernet0/23 unassigned YES manual down
down
FastEthernet0/24 unassigned YES manual down
down
GigabitEthernet0/1 unassigned YES manual down
down
GigabitEthernet0/2 unassigned YES manual down
down
Vlan1 10.10.10.2 YES manual up
up
SW1#
SW1#
SW1#
SW1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/0 ms
SW1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
SW1#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [SW1-confg]? SW1-backup
Writing running-config...!!
[OK - 1121 bytes]
1121 bytes copied in 0 secs
SW1#
Copy
Paste


TFTP ServerServer0
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP
TFTP
Service
On
Off
File
R1-backup
SW1-backup
asa842-k8.bin
asa923-k8.bin
c1841-advipservicesk9-mz.124-15.T1.bin
c1841-ipbase-mz.123-14.T7.bin
c1841-ipbasek9-mz.124-12.bin
c1900-universalk9-mz.SPA.155-3.M4a.bin
c2600-advipservicesk9-mz.124-15.T1.bin
c2600-i-mz.122-28.bin
c2600-ipbasek9-mz.124-8.bin
c2800nm-advipservicesk9-mz.124-15.T1.bin
c2800nm-advipservicesk9-mz.151-4.M4.bin
c2800nm-ipbase-mz.123-14.T7.bin
c2800nm-ipbasek9-mz.124-8.bin
c2900-universalk9-mz.SPA.155-3.M4a.bin
c2950-i6q4l2-mz.121-22.EA4.bin
c2950-i6q4l2-mz.121-22.EA8.bin
c2960-lanbase-mz.122-25.FX.bin
c2960-lanbase-mz.122-25.SEE1.bin
c2960-lanbasek9-mz.150-2.SE4.bin
c3560-advipservicesk9-mz.122-37.SE1.bin
c3560-advipservicesk9-mz.122-46.SE.bin
c800-universalk9-mz.SPA.152-4.M4.bin
c800-universalk9-mz.SPA.154-3.M6a.bin
Remove File


R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
to comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
R1#dir flash:
Directory of flash0:/
3 -rw- 33591768 <no date> c2900-universalk9-mz.SPA.151-4.M4.bin
2 -rw- 28282 <no date> sigdef-category.xml
1 -rw- 227537 <no date> sigdef-default.xml
255744000 bytes total (221896413 bytes free)
R1#copy flash: tftp:
Source filename []? flash0:c2900-universalk9-mz.SPA.151-1.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [flash0:c2900-universalk9-mz.SPA.151-1.M4.bin]? R1-IOS-backup.bin
Writing flash0:c2900-universalk9-mz.SPA.151-1.M4.bin...%Error opening flash:flash0:c2900-universalk9-mz.SPA.151-1.M4.bin (No such file or directory)
R1#copy flash: tftp:
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]? R1-IOS-backup.bin
Writing c2900-universalk9-mz.SPA.151-4.M4.bin...
[OK - 33591768 bytes]
33591768 bytes copied in 2.148 secs (1641991 bytes/sec)
R1#
Copy
Paste
TFTP ServerServer0
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP
TFTP
Service
On
Off
File
R1-IOS-backup.bin
R1-backup
SW1-backup
asa842-k8.bin
asa923-k8.bin
c1841-advipservicesk9-mz.124-15.T1.bin
c1841-ipbase-mz.123-14.T7.bin
c1841-ipbasek9-mz.124-12.bin
c1900-universalk9-mz.SPA.155-3.M4a.bin
c2600-advipservicesk9-mz.124-15.T1.bin
c2600-i-mz.122-28.bin
c2600-ipbasek9-mz.124-8.bin
c2800nm-advipservicesk9-mz.124-15.T1.bin
c2800nm-advipservicesk9-mz.151-4.M4.bin
c2800nm-ipbase-mz.123-14.T7.bin
c2800nm-ipbasek9-mz.124-8.bin
c2900-universalk9-mz.SPA.155-3.M4a.bin
c2950-i6q4l2-mz.121-22.EA4.bin
c2950-i6q4l2-mz.121-22.EA8.bin
c2960-lanbase-mz.122-25.FX.bin
c2960-lanbase-mz.122-25.SEE1.bin
c2960-lanbasek9-mz.150-2.SE4.bin
c3560-advipservicesk9-mz.122-37.SE1.bin
c3560-advipservicesk9-mz.122-46.SE.bin
c800-universalk9-mz.SPA.152-4.M4.bin
Remove File


R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
R1>enable
R1#erase startup-config
Erasing the nvram filesystem will remove all configuration files!
Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
R1#reload
Proceed with reload? [confirm]
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled
Readonly ROMMON initialized
program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340
IOS Image Load Test
Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
[OK]
Smart Init is enabled
smart init is sizing iomem
TYPE MEMORY_REQ
Onboard devices & buffer pools 0x022F6000
TOTAL: 0x022F6000
Rounded IOMEM up to: 36Mb.
Using 6 percent iomem. [36Mb/512Mb]
Restricted Rights Legend
Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c) of the Commercial Computer Software - Restricted Rights clause at FAR sec. 52.227-19 and subparagraph


R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
!
!
!
!
!
!
!
!
no ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO2911/K9 sn FTX1524LU74-
!
!
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
 shutdown

```
Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0,
changed state to up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#copy tftp: startup-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1-backup
Destination filename [startup-config]?

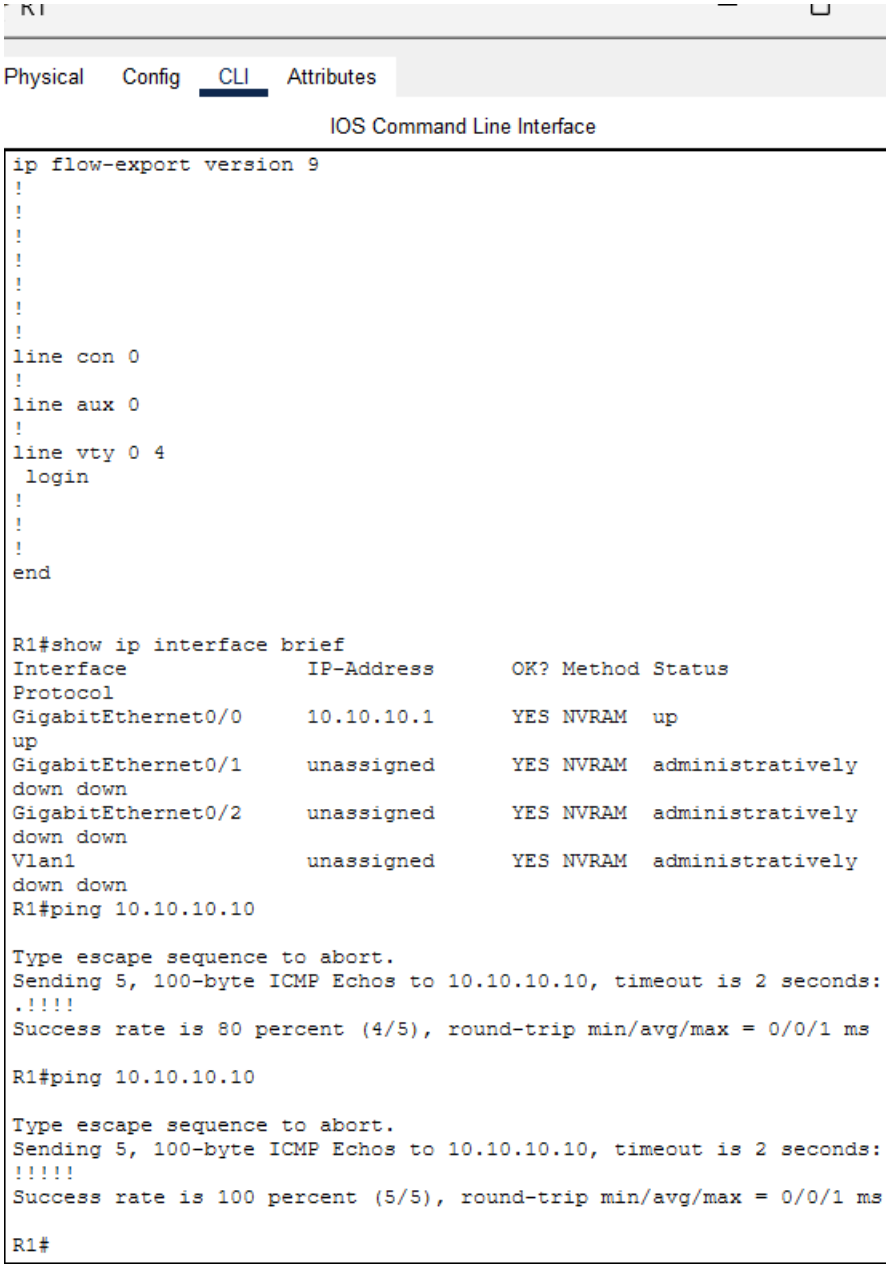
Accessing tftp://10.10.10.10/R1-backup....
Loading R1-backup from 10.10.10.10: !
[OK - 701 bytes]

701 bytes copied in 3.002 secs (233 bytes/sec)
Router#reload
System configuration has been modified. Save? [yes/no]:no
Proceed with reload? [confirm]
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC
disabled

Readonly ROMMON initialized

program load complete, entry point: 0x80803000, size: 0x1b340
program load complete, entry point: 0x80803000, size: 0x1b340

IOS Image Load Test
___________________
Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
################################################################################
###### [OK]
Smart Init is enabled
```


R1
Physical
Config
CLI
Attributes
IOS Command Line Interface
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
!
line aux 0
!
line vty 0 4
login
!
!
!
end
R1#show ip interface brief
Interface IP-Address OK? Method Status
Protocol
GigabitEthernet0/0 10.10.10.1 YES NVRAM up
up
GigabitEthernet0/1 unassigned YES NVRAM administratively
down down
GigabitEthernet0/2 unassigned YES NVRAM administratively
down down
Vlan1 unassigned YES NVRAM administratively
down down
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/1 ms
R1#ping 10.10.10.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/1 ms
R1#