



NETWORK PRACTICAL WEEK 5


Step 1 Setup Console connections

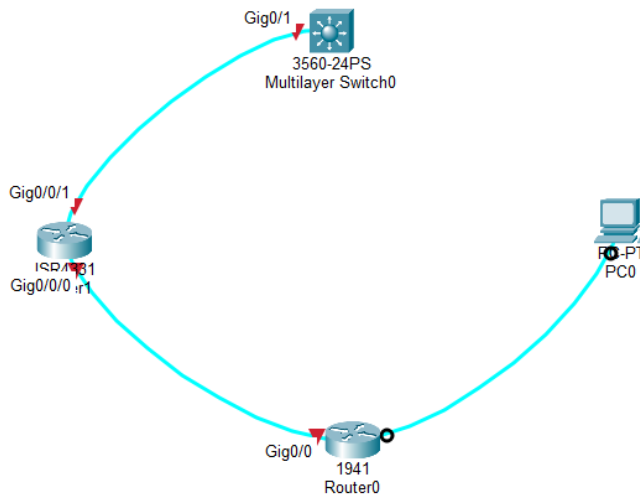

Step 2 Access device via terminal

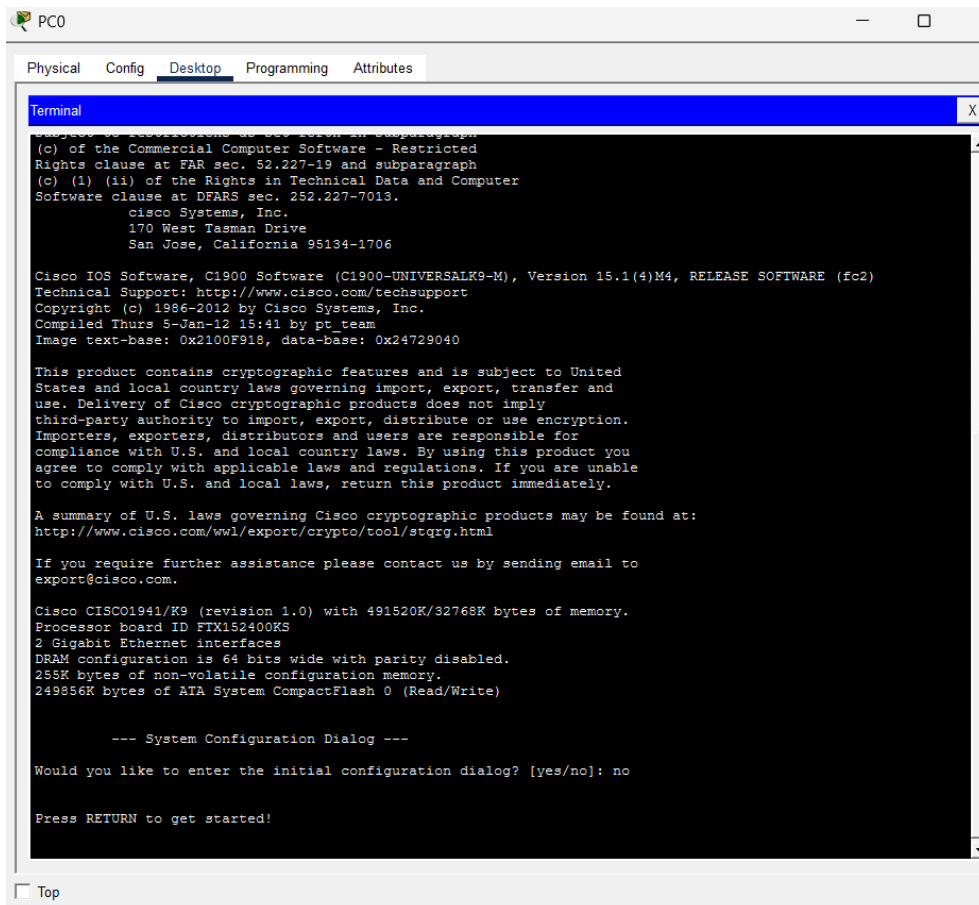

Step 3 Execute Device Configuration

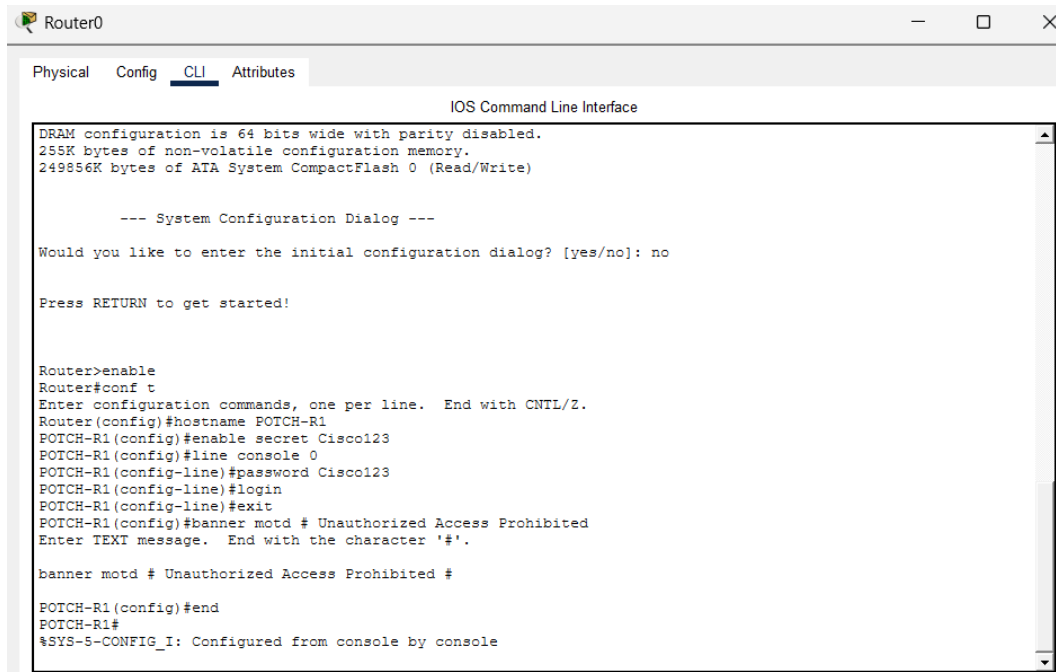

The screenshot shows the CLI of Router0. It starts with system information: 'DRAM configuration is 64 bits wide with parity disabled. 255K bytes of non-volatile configuration memory. 249856K bytes of ATA System CompactFlash 0 (Read/Write)'. Then it enters the 'System Configuration Dialog' where the user answers 'no' to entering the initial configuration. After pressing RETURN, the user enters 'enable' to get to the configuration mode. Then they enter 'conf t' to enter configuration mode. The user then enters the following commands: 'hostname POTCH-R1', 'enable secret Cisco123', 'line console 0', 'password Cisco123', 'login', 'exit', 'banner motd # Unauthorized Access Prohibited', and 'end'. The router displays the banner message and confirms the configuration. The session ends with 'SYS-5-CONFIG_I: Configured from console by console'.

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---


Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname POTCH-R1
POTCH-R1(config)#enable secret Cisco123
POTCH-R1(config)#line console 0
POTCH-R1(config-line)#password Cisco123
POTCH-R1(config-line)#login
POTCH-R1(config-line)#exit
POTCH-R1(config)#banner motd # Unauthorized Access Prohibited
Enter TEXT message. End with the character '#'.

banner motd # Unauthorized Access Prohibited #

POTCH-R1(config)#end
POTCH-R1#
%SYS-5-CONFIG_I: Configured from console by console
```

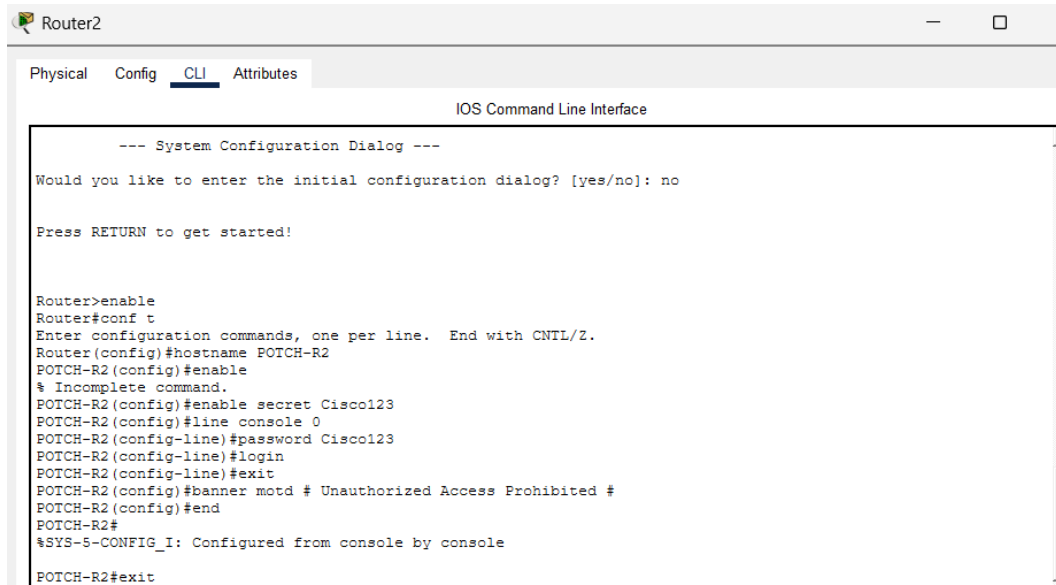

The screenshot shows the CLI of Router2. It starts with the 'System Configuration Dialog' where the user answers 'no' to entering the initial configuration. After pressing RETURN, the user enters 'enable' to get to the configuration mode. Then they enter 'conf t' to enter configuration mode. The user then enters the following commands: 'hostname POTCH-R2', 'enable', '% Incomplete command.', 'enable secret Cisco123', 'line console 0', 'password Cisco123', 'login', 'exit', 'banner motd # Unauthorized Access Prohibited', and 'end'. The router displays the banner message and confirms the configuration. The session ends with 'SYS-5-CONFIG_I: Configured from console by console' and the user enters 'exit'.


```
Router2
Physical Config CLI Attributes
IOS Command Line Interface

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname POTCH-R2
POTCH-R2(config)#enable
% Incomplete command.
POTCH-R2(config)#enable secret Cisco123
POTCH-R2(config)#line console 0
POTCH-R2(config-line)#password Cisco123
POTCH-R2(config-line)#login
POTCH-R2(config-line)#exit
POTCH-R2(config)#banner motd # Unauthorized Access Prohibited #
POTCH-R2(config)#end
POTCH-R2#
%SYS-5-CONFIG_I: Configured from console by console
POTCH-R2#exit
```

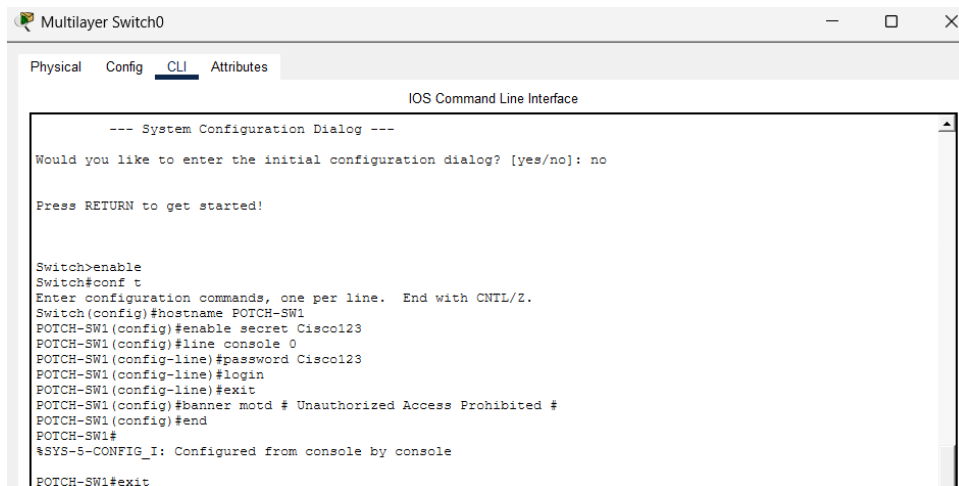

The screenshot shows a window titled "Multilayer Switch0" with tabs for "Physical", "Config", "CLI", and "Attributes". The "CLI" tab is active, displaying the "IOS Command Line Interface". The interface shows a "System Configuration Dialog" where the user has responded "no" to entering the initial configuration. Following this, the user enters "enable" to reach the privileged EXEC mode. Then, they enter "conf t" to enter global configuration mode. A series of configuration commands are entered: "hostname POTCH-SW1", "enable secret Cisco123", "line console 0", "password Cisco123", "login", "exit", "banner motd # Unauthorized Access Prohibited #", "end", and "exit". The system message "%SYS-5-CONFIG_I: Configured from console by console" is displayed. The prompt returns to "POTCH-SW1#".

```
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Switch>enable
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname POTCH-SW1
POTCH-SW1(config)#enable secret Cisco123
POTCH-SW1(config)#line console 0
POTCH-SW1(config-line)#password Cisco123
POTCH-SW1(config-line)#login
POTCH-SW1(config-line)#exit
POTCH-SW1(config)#banner motd # Unauthorized Access Prohibited #
POTCH-SW1(config)#end
POTCH-SW1#
%SYS-5-CONFIG_I: Configured from console by console
POTCH-SW1#exit
```

Step 4 Verify