


Kamohelo Prac 6

PC1

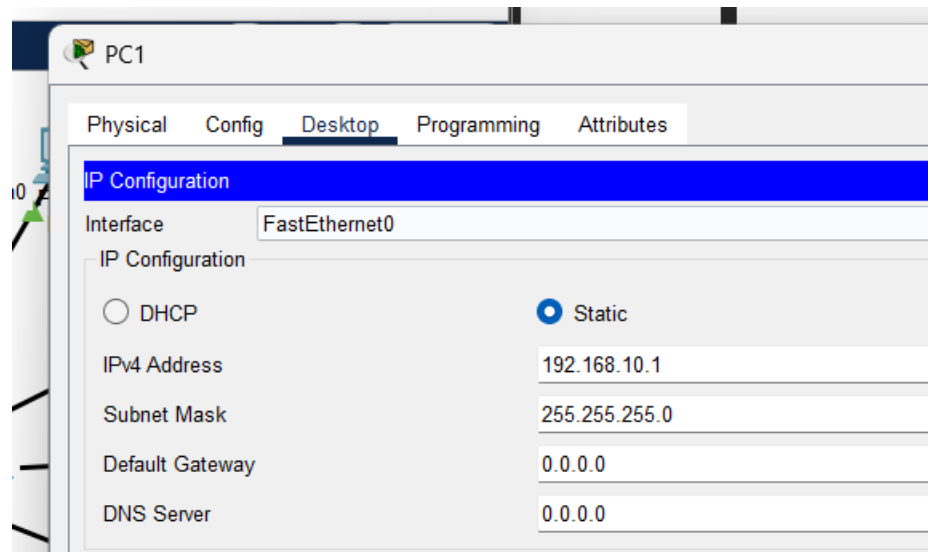

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.1


Pinging 192.168.10.1 with 32 bytes of data:

Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128
Reply from 192.168.10.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

PC2

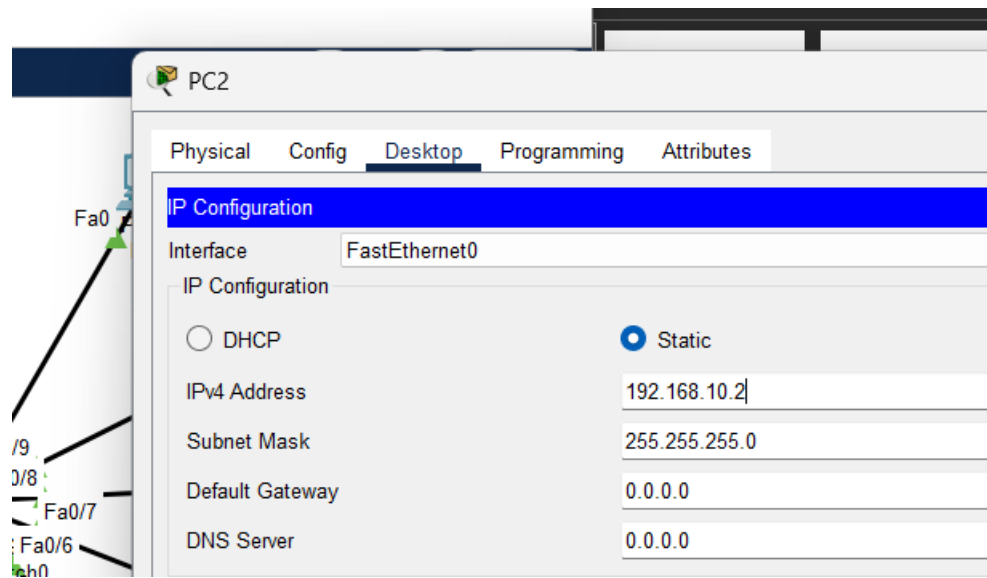



```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:


Reply from 192.168.10.2: bytes=32 time=1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

PC3

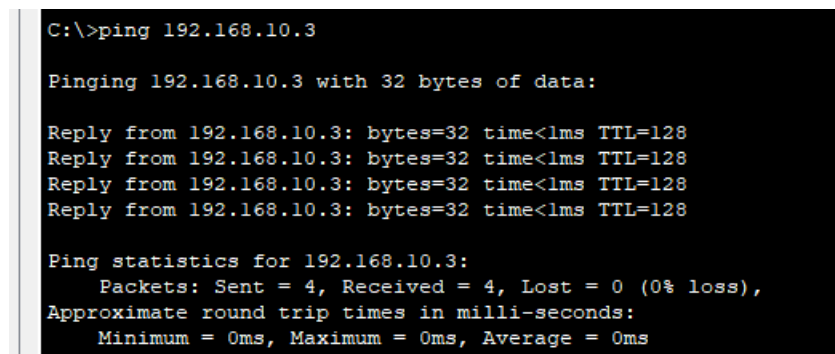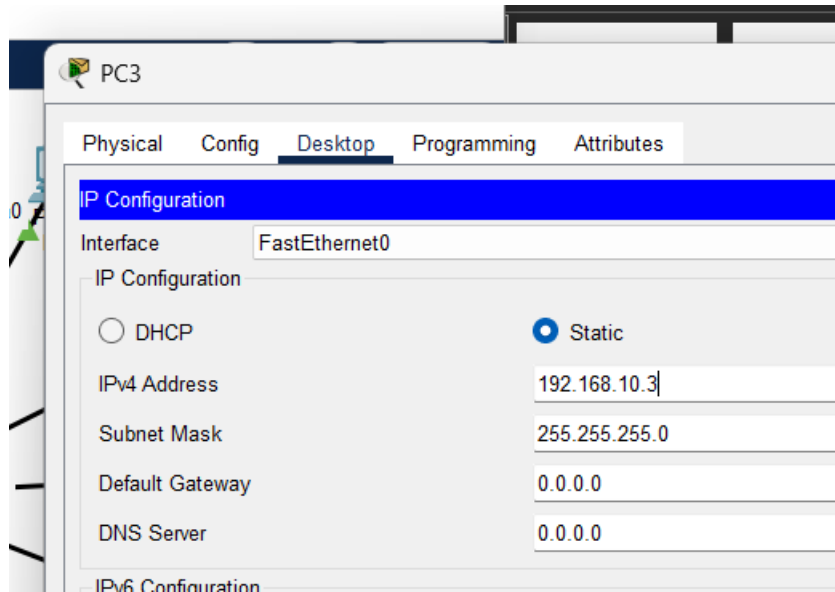

PC4

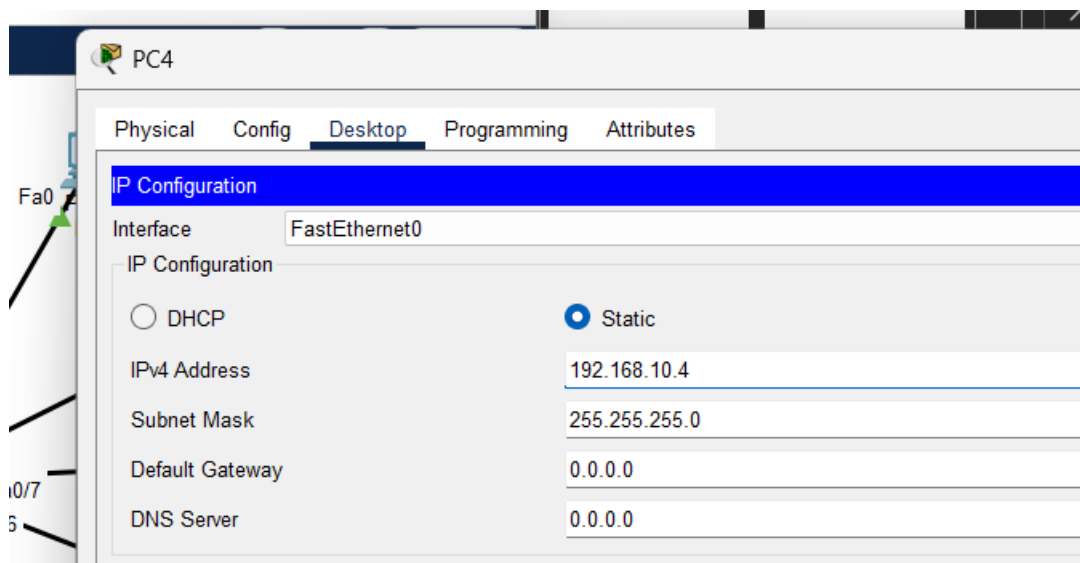


```
C:\>ping 192.168.10.4

Pinging 192.168.10.4 with 32 bytes of data:

Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC5

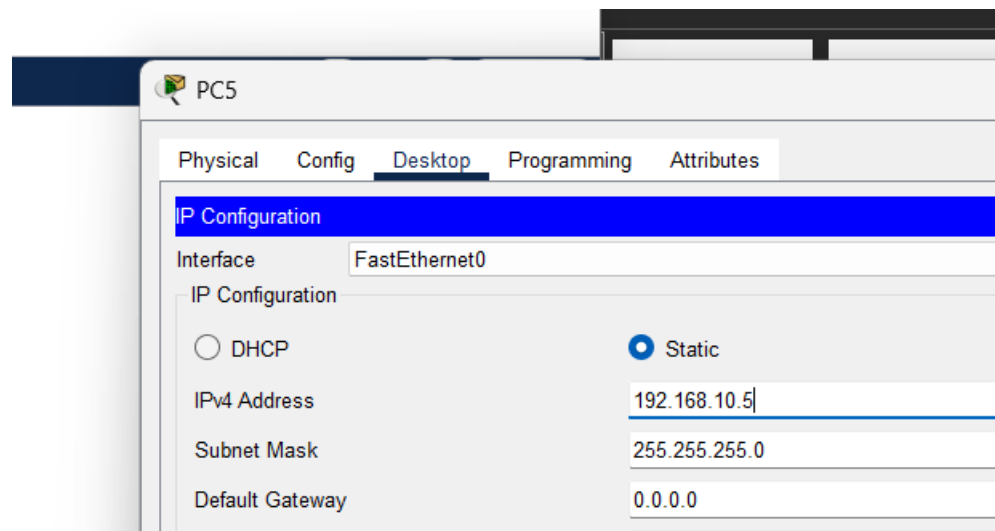


```
C:\>ping 192.168.10.5

Pinging 192.168.10.5 with 32 bytes of data:

Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC6

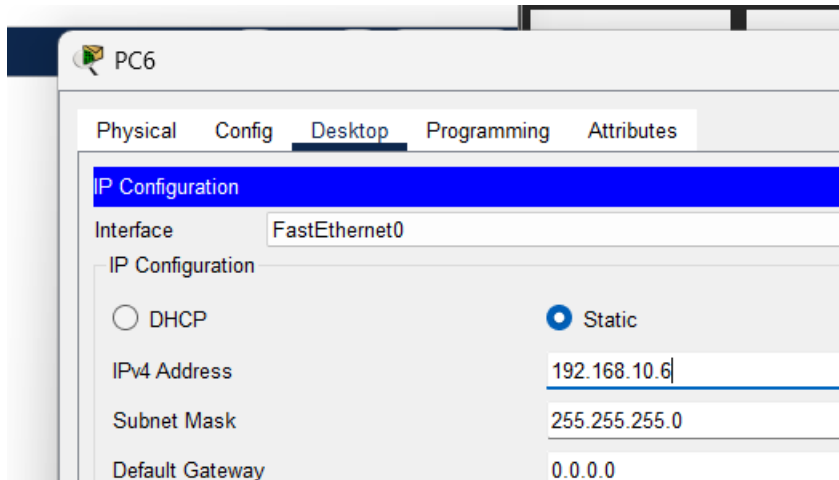


```
C:\>ping 192.168.10.6

Pinging 192.168.10.6 with 32 bytes of data:

Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC7

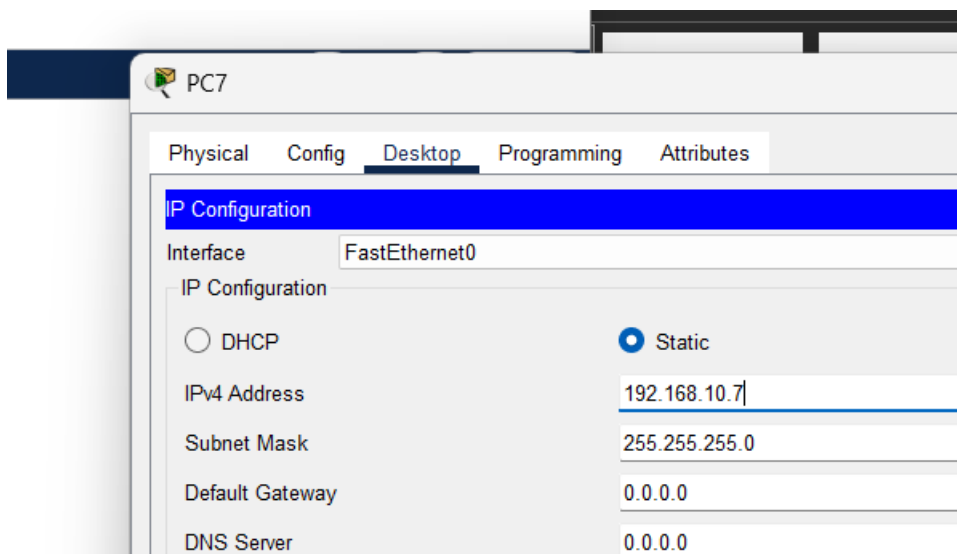


```
Pinging 192.168.10.7 with 32 bytes of data:

Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC8

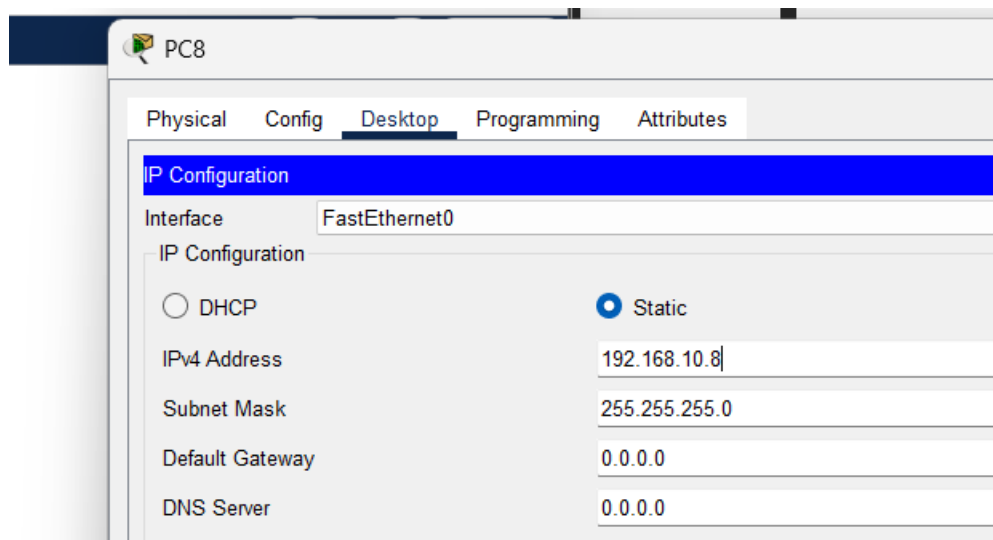


```
C:\>ping 192.168.10.8

Pinging 192.168.10.8 with 32 bytes of data:

Reply from 192.168.10.8: bytes=32 time<1ms TTL=128
Reply from 192.168.10.8: bytes=32 time<1ms TTL=128
Reply from 192.168.10.8: bytes=32 time<1ms TTL=128
Reply from 192.168.10.8: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC9

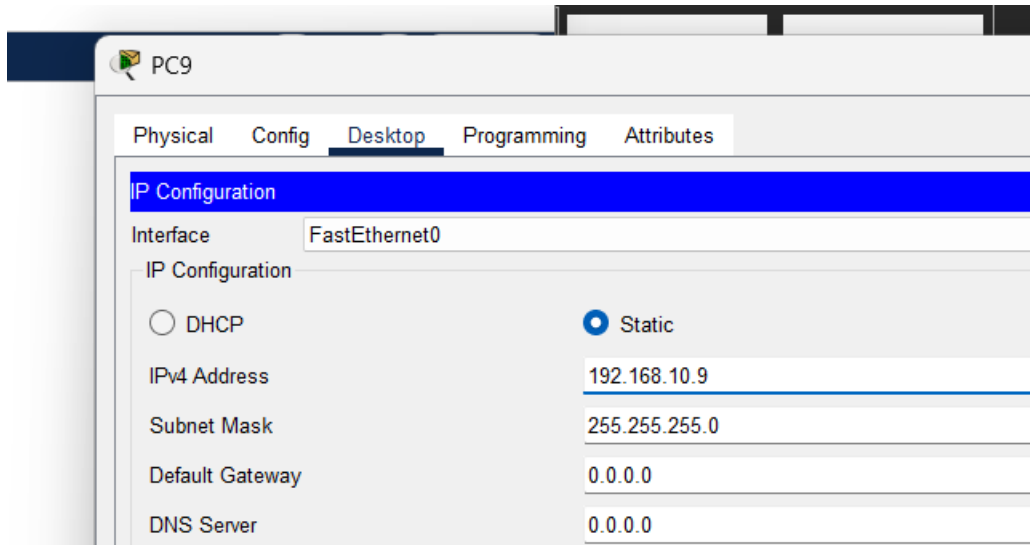


```
C:\>ping 192.168.10.9

Pinging 192.168.10.9 with 32 bytes of data:

Reply from 192.168.10.9: bytes=32 time<1ms TTL=128
Reply from 192.168.10.9: bytes=32 time<1ms TTL=128
Reply from 192.168.10.9: bytes=32 time<1ms TTL=128
Reply from 192.168.10.9: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.9:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

PC10

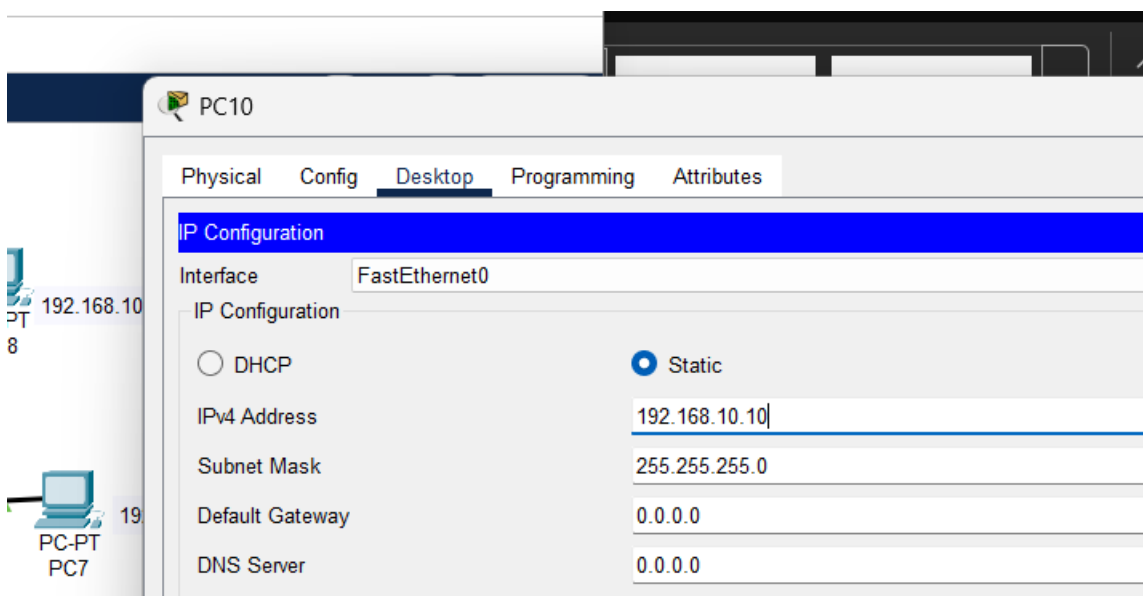

```
C:\>ping 192.168.10.10

Pinging 192.168.10.10 with 32 bytes of data:

Reply from 192.168.10.10: bytes=32 time<lms TTL=128
Reply from 192.168.10.10: bytes=32 time<lms TTL=128
Reply from 192.168.10.10: bytes=32 time<lms TTL=128
Reply from 192.168.10.10: bytes=32 time<lms TTL=128

Ping statistics for 192.168.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Switch

```
Switch>enable
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface vlan 1
Switch(config-if)#ip address 192.168.10.254 255.255.255.0
Switch(config-if)#no shutdown

Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

Switch(config-if)#exit
Switch(config)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

```
C:\>ping 192.168.10.254

Pinging 192.168.10.254 with 32 bytes of data:

Reply from 192.168.10.254: bytes=32 time<lms TTL=255
Reply from 192.168.10.254: bytes=32 time<lms TTL=255
Reply from 192.168.10.254: bytes=32 time<lms TTL=255
Reply from 192.168.10.254: bytes=32 time<lms TTL=255

Ping statistics for 192.168.10.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Verification

```

Switch>enable
Switch#show running-config
Building configuration...

Current configuration : 1152 bytes
!
version 12.2(37)SE1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Switch
!

```

```
Switch#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gig0/1, Gig0/2
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

```
Switch#
```

```
Switch#show mac address-table
Mac Address Table
```

Vlan	Mac Address	Type	Ports
1	0040.0bd5.b6cd	DYNAMIC	Fa0/1

```
Switch#
```

Diagram

