


Network diagram

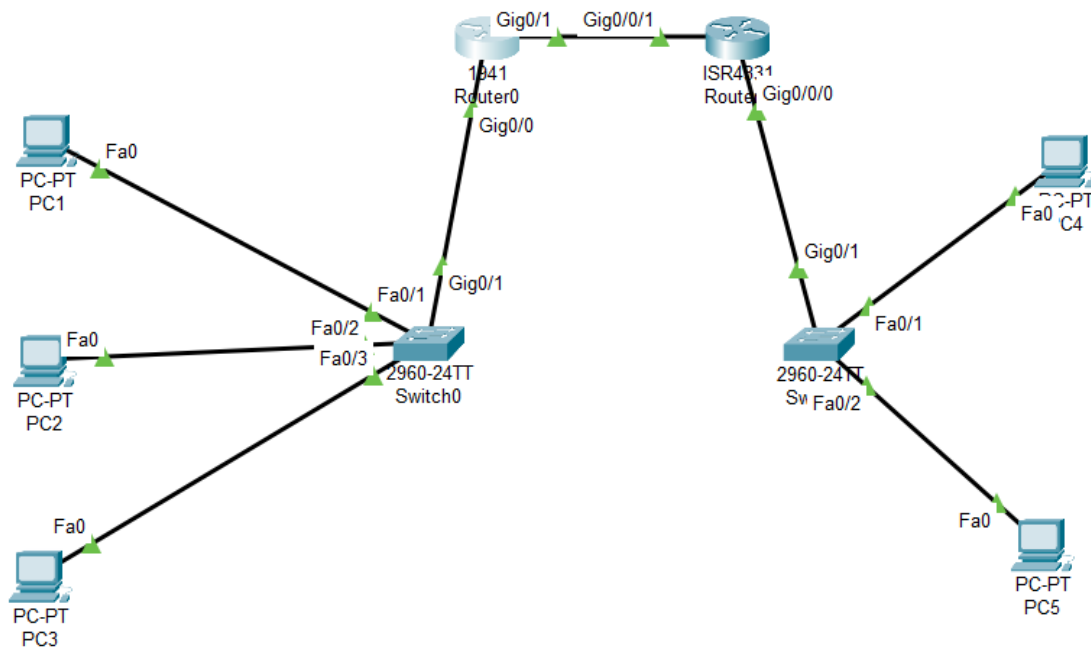

Router 1

```
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface g0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router(config-if)#conf t
%Invalid hex value
Router(config)#interface g0/1
Router(config-if)#ip address 10.0.0.8 255.255.255.252
Bad mask /30 for address 10.0.0.8
Router(config-if)#ip address 10.0.0.2 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

Router 2

```
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface g0/0/0
Router(config-if)#ip address 192.168.20.10 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface g0/0/1
Router(config-if)#ip address 10.0.0.4 255.255.255.252
Bad mask /30 for address 10.0.0.4
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/1, changed state to up
Router(config-if)#end
```

Verification

```
Router#show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
GigabitEthernet0/0	192.168.10.1	YES	manual	up	up
GigabitEthernet0/1	10.0.0.2	YES	manual	up	up
Vlan1	unassigned	YES	unset	administratively down	down

```
Router#
```

```
Router>enable
Router#show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
GigabitEthernet0/0/0	192.168.20.10	YES	manual	up	up
GigabitEthernet0/0/1	unassigned	YES	unset	up	up
GigabitEthernet0/0/2	unassigned	YES	unset	administratively down	down
Vlan1	unassigned	YES	unset	administratively down	down

```
Router#
```

```
Pinging 192.168.10.6 with 32 bytes of data:

Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128
Reply from 192.168.10.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.10.7

Pinging 192.168.10.7 with 32 bytes of data:

Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128
Reply from 192.168.10.7: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```




```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.6

Pinging 192.168.20.6 with 32 bytes of data:

Reply from 192.168.20.6: bytes=32 time<1ms TTL=128
Reply from 192.168.20.6: bytes=32 time<1ms TTL=128
Reply from 192.168.20.6: bytes=32 time<1ms TTL=128
Reply from 192.168.20.6: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.20.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

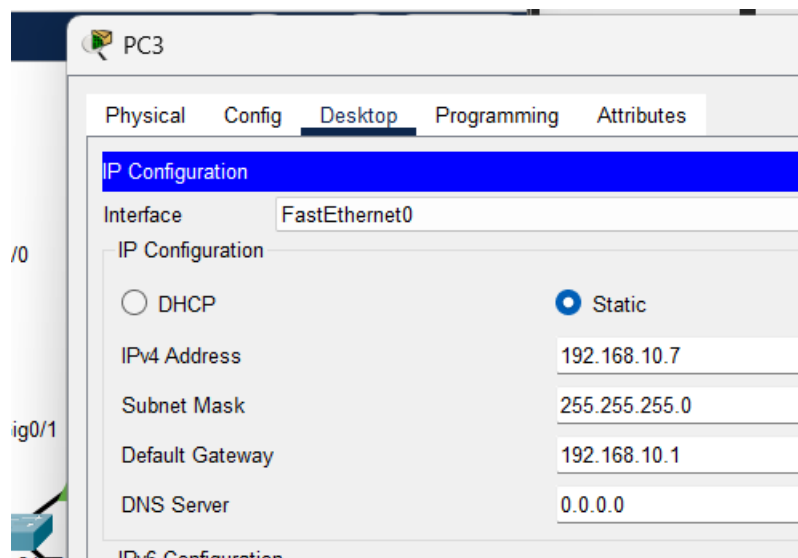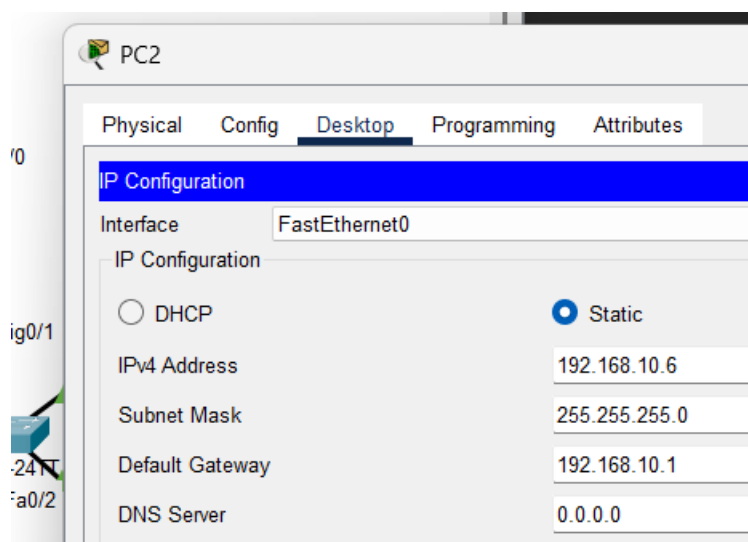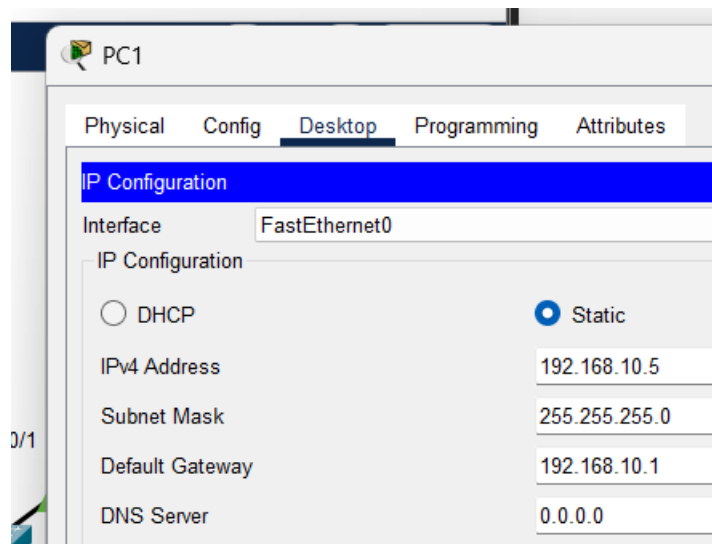

PC4

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.5

Subnet Mask 255.255.255.0

Default Gateway 192.168.20.1

DNS Server 0.0.0.0

PC5

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.20.6

Subnet Mask 255.255.255.0

Default Gateway 192.168.20.1

DNS Server 0.0.0.0

IPv6 Configuration